



# ENERG

енергия · ενεργεια



Indoor unit

EHSC-\*\*D


Outdoor unit

PUMY-P112VKM5(-BS)



55 °C

35 °C

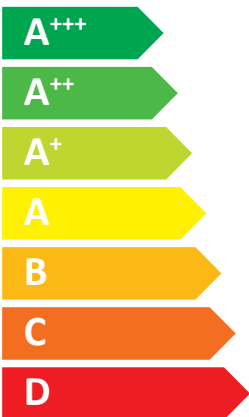

**A<sup>+</sup>**

**A<sup>++</sup>**



**40** dB



**69** dB

- 08
- **11**
- 10

kW

- 08
- **11**
- 11

kW



2019

811/2013

BH79V012H10

## Mitsubishi Electric ErP Directive Related Product Information: erp.mitsubishielectric.eu/erp

		For medium-temperature application.																						For low-temperature application.																											
1	2	3	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24								
		Medium-temperature application																						Low-temperature application																											
Outdoor unit	Indoor unit	Medium-temperature application																						Low-temperature application																											
		Medium-temperature application	Seasonal space heating energy efficiency class	Water heating energy efficiency class	Rated heat output under average climate conditions	For space heating, annual energy consumption under average climate conditions	For water heating, annual electricity consumption under average climate conditions	Seasonal space heating energy efficiency under average climate conditions	Water heating energy efficiency under average climate conditions	Sound power level L <sub>WA</sub> indoor	Work only during off-peak hours	Rated heat output under colder climate conditions	Rated heat output under warmer climate conditions	For space heating, annual energy consumption under colder climate conditions	For space heating, annual energy consumption under warmer climate conditions	For water heating, annual energy consumption under colder climate conditions	For water heating, annual energy consumption under warmer climate conditions	Seasonal space heating energy efficiency under colder climate conditions	Seasonal space heating energy efficiency under warmer climate conditions	Water heating energy efficiency under colder climate conditions	Water heating energy efficiency under warmer climate conditions	Sound power level L <sub>WA</sub> outdoor	Low-temperature application	Seasonal space heating energy efficiency class	Water heating energy efficiency class	Rated heat output under average climate conditions	For space heating, annual energy consumption under average climate conditions	For water heating, annual electricity consumption under average climate conditions	Seasonal space heating energy efficiency under average climate conditions	Water heating energy efficiency under average climate conditions	Sound power level L <sub>WA</sub> indoor	Work only during off-peak hours	Rated heat output under colder climate conditions	Rated heat output under warmer climate conditions	For space heating, annual energy consumption under colder climate conditions	For space heating, annual energy consumption under warmer climate conditions	For water heating, annual electricity consumption under colder climate conditions	For water heating, annual electricity consumption under warmer climate conditions	Seasonal space heating energy efficiency under colder climate conditions	Seasonal space heating energy efficiency under warmer climate conditions	Water heating energy efficiency under colder climate conditions	Water heating energy efficiency under warmer climate conditions	Sound power level L <sub>WA</sub> outdoor								
kW	kWh	kWh	%	%	dB	kW	kWh	kWh	kWh	kWh	%	%	%	%	dB	kW	kWh	kWh	kWh	kWh	%	%	dB	kW	kWh	kWh	kWh	kWh	%	%	dB	kW	kWh	kWh	kWh	kWh	%	%	%	%	dB	kW	kWh	kWh	kWh	kWh	%	%	%	%	dB
PUMY-P112VKM5(-BS)	EHST20C***C(W)	✓	A+	A	11.2	7387	1441	121	75	40	-	8.0	10.0	7263	3746	1955	1264	106	139	55	86	69	✓	A++	A	11.2	5341	1441	168	75	40	-	8.0	11.2	5844	2830	1955	1264	132	207	55	86	69								
		✓	A+	A	11.2	7387	-	121	-	40	-	8.0	10.0	7263	3746	-	-	106	139	-	-	69	✓	A++	A	11.2	5341	-	168	-	40	-	8.0	11.2	5844	2830	-	-	132	207	-	-	69								
		✓	A+	A	11.2	7387	1019	121	106	40	-	8.0	10.0	7263	3746	1374	910	106	139	77	119	69	✓	A++	A	11.2	5341	1019	168	106	40	-	8.0	11.2	5844	2830	1374	910	132	207	77	119	69								
PUMY-P112YKM4(-BS)	EHST20C***C(W)	✓	A+	A	11.2	7387	1441	121	75	40	-	8.0	10.0	7263	3746	1955	1264	106	139	55	86	69	✓	A++	A	11.2	5341	1441	168	75	40	-	8.0	11.2	5844	2830	1955	1264	132	207	55	86	69								
		✓	A+	A	11.2	7387	-	121	-	40	-	8.0	10.0	7263	3746	-	-	106	139	-	-	69	✓	A++	A	11.2	5341	-	168	-	40	-	8.0	11.2	5844	2830	-	-	132	207	-	-	69								
		✓	A+	A	11.2	7387	1019	121	106	40	-	8.0	10.0	7263	3746	1374	910	106	139	77	119	69	✓	A++	A	11.2	5341	1019	168	106	40	-	8.0	11.2	5844	2830	1374	910	132	207	77	119	69								
PUMY-P112YKME4(-BS)	EHST20C***C(W)	✓	A+	A	11.2	7387	1441	121	75	40	-	8.0	10.0	7263	3746	1955	1264	106	139	55	86	69	✓	A++	A	11.2	5341	1441	168	75	40	-	8.0	11.2	5844	2830	1955	1264	132	207	55	86	69								
		✓	A+	A	11.2	7387	-	121	-	40	-	8.0	10.0	7263	3746	-	-	106	139	-	-	69	✓	A++	A	11.2	5341	-	168	-	40	-	8.0	11.2	5844	2830	-	-	132	207	-	-	69								
		✓	A+	A	11.2	7387	1019	121	106	40	-	8.0	10.0	7263	3746	1374	910	106	139	77	119	69	✓	A++	A	11.2	5341	1019	168	106	40	-	8.0	11.2	5844	2830	1374	910	132	207	77	119	69								
PUMY-P125VKM5(-BS)	EHST20C***C(W)	✓	A+	A	11.2	7387	1441	121	75	40	-	8.0	10.0	7263	3746	1955	1264	106	139	55	86	69	✓	A++	A	11.2	5341	1441	168	75	40	-	8.0	11.2	5844	2830	1955	1264	132	207	55	86	69								
		✓	A+	A	11.2	7387	-	121	-	40	-	8.0	10.0	7263	3746	-	-	106	139	-	-	69	✓	A++	A	11.2	5341	-	168	-	40	-	8.0	11.2	5844	2830	-	-	132	207	-	-	69								
		✓	A+	A	11.2	7387	1019	121	106	40	-	8.0	10.0	7263	3746	1374	910	106	139	77	119	69	✓	A++	A	11.2	5341	1019	168	106	40	-	8.0	11.2	5844	2830	1374	910	132	207	77	119	69								
PUMY-P125YKME4(-BS)	EHST20C***C(W)	✓	A+	A	11.2	7387	1441	121	75	40	-	8.0	10.0	7263	3746	1955	1264	106	139	55	86	69	✓	A++	A	11.2	5341	1441	168	75	40	-	8.0	11.2	5844	2830	1955	1264	132	207	55	86	69								
		✓	A+	A	11.2	7387	-	121	-	40	-	8.0	10.0	7263	3746	-	-	106	139	-	-	69	✓	A++	A	11.2	5341	-	168	-	40	-	8.0	11.2	5844	2830	-	-	132	207	-	-	69								
		✓	A+	A	11.2	7387	1019	121	106	40	-	8.0	10.0	7263	3746	1374	910	106	139	77	119	69	✓	A++	A	11.2	5341	1019	168	106	40	-	8.0	11.2	5844	2830	1374	910	132	207	77	119	69								
PUMY-P140VKM5(-BS)	EHST20C***C(W)	✓	A+	A	11.2	7387	1441	121	75	40	-	8.0	10.0	7263	3746	1955	1264	106	139	55	86	69	✓	A++	A	11.2	5341	1441	168	75	40	-	8.0	11.2	5844	2830	1955	1264	132	207	55	86	69								
		✓	A+	A	11.2	7387	-	121	-	40	-	8.0	10.0	7263	3746	-	-	106	139	-	-	69	✓	A++	A	11.2	5341	-	168	-	40	-	8.0	11.2	5844	2830	-	-	132	207	-	-	69								
		✓	A+	A	11.2	7387	1019	121	106	40	-	8.0	10.0	7263	3746	1374	910	106	139	77	119	69	✓	A++	A	11.2	5341	1019	168	106	40	-	8.0	11.2	5844	2830	1374	910	132	207	77	119	69								
PUMY-P140YKME4(-BS)	EHST20C***C(W)	✓	A+	A	11.2	7387	1441	121	75	40	-	8.0	10.0	7263	3746	1955	1264	106	139	55	86	69	✓	A++	A	11.2	5341	1441	168	75	40	-	8.0	11.2	5844	2830	1955	1264	132	207	55	86	69								
		✓	A+	A	11.2	7387	-	121	-	40	-	8.0	10.0	7263	3746	-	-	106	139	-	-	69	✓	A++	A	11.2	5341	-	168	-	40	-	8.0	11.2	5844	2830	-	-	132	207	-	-	69								
		✓	A+	A	11.2	7387	1019	121	106	40	-	8.0	10.0	7263	3746	1374	910	106	139	77	119	69	✓	A++	A	11.2	5341	1019	168	106	40	-	8.0	11.2	5844	2830	1374	910	132	207	77	119	69								

	English	Deutsch	Français	Italiano	Espanol
	Nederlands	Svenska	Dansk	Portugués	Ελληνικά
	suomi	Čeština	Български	Polski	-
1	Outdoor unit butenunit Ulkoyksikkö	Außengerät Utomhusenhet	unità esteriore Udenårs enhed	unità esterna Udenårs enhed	unidad exterior Εξωτερική μονάδα
2	Indoor unit binnenunit Sisäyksikkö	Innengerät Inomhusenhet	unità interieure Indendørs enhed	unità interna unidade interior	unidad interior Εσωτερική μονάδα
3	Medium-temperature application middertemperatuur-toepassing keskilämpötilan sovellus	Mitteltemperaturanwendung mediumtemperaturapplikation	l'application à moyenne température middelttemperaturanvendelsen	le applicazioni a media temperatura a aplicação a média temperatura	la aplicación de media temperatura η εφαρμογή σε μέση θερμοκρασία
4	Low-temperature application lage-temperatuur-toepassing matalanlämpötilän sovellus	Niedertemperaturanwendung lågtemperaturapplikation	l'application à basse température lavtemperaturanvendelsen	le applicazioni a bassa temperatura a aplicação a baixa temperatura	la aplicación de baja temperatura η εφαρμογή σε χαμηλή θερμοκρασία
5	Seasonal space heating energy efficiency class de seizoengebonden energie-efficiëntieklasse voor ruimteverwarming tiläilyksen kaustitainen energiatehokkuusluokka	die jahreszeitbedingte Raumheizungs-Energieeffizienzklasse für die Wärmeserbereitungs-Energieeffizienz trida sezonní energetická účinnost vytápění	la classe d'efficacité énergétique saisonnière pour le chauffage des locaux klassen for årsvirkingsgrad ved rumopvarmning	la classe di efficienza energetica stagionale del riscaldamento d'ambiente A classe de eficiência energética do aquecimento ambiente sazonal	la clase de eficiencia energética estacional de calefacción η τάξη ενεργειακής απόδοσης της εποχιακής θέρμανσης χώρου
6	Water heating energy efficiency class de energie-efficiëntieklasse voor waterverwarming vedenlämmityksen energiatehokkuusluokka	die Wärmeserbereitungs-Energieeffizienzklasse für die Warmwasserbereitungs-Energieeffizienz trida energetická účinnost ohřevu vody	la classe d'efficacité énergétique pour le chauffage de l'eau klassen for årsvirkingsgrad ved vandopvarmning	la classe de efficacité énergétique du riscaldamento dell'acqua A classe de eficiência energética do aquecimento de água	la clase de eficiencia energética del caudero de agua η τάξη ενεργειακής απόδοσης θέρμανσης νερού
7	Rated heat output under average climate conditions de nominale warmteafgifte(onder gemiddelde klimaatomstandigheden) nimeillämpöteho(keskimääräisissä ilmastolo-olosuhteissa)	die Wärmenennleistung bei durchschnittlichen Klimaverhältnissen den nominale avgivna värmeeffekten(under genomsnittliga klimatförhållanden) jmenovitý tepelný výkon za průměrných klimatických podmínek	la puissance thermique nominale dans les conditions climatiques moyennes den nominale nytteeffekt(under genomsnittliga klimatförhållanden) номиналната топлинна мощност(при средни климатични условия)	la potenza termica nominale(in condizioni climatiche medie) A potencia calorífica nominal(em condições climáticas médias)	la potencia calorífica nominal(en condiciones climáticas medias) η ονομαστική θερμική ισχύς(ούπό μέσης κλιματικής συνθήκης)
8	For space heating, annual energy consumption under average climate conditions voor ruimteverwarming, het jaarlijkse energiegebruik(onder gemiddelde klimaatomstandigheden) tiläilykseenä vuotuinen energiankulutus(keskimääräisissä ilmastolo-olosuhteissa)	für die Raumheizung, den jährlichen Energieverbrauch bei durchschnittlichen Klimaverhältnissen For rumopvarmning, årlig energiförbrukning(vid genomsnittliga klimatförhållanden) pro vytápění – roční spotřeba energie za průměrných klimatických podmínek	pour le chauffage des locaux, la consommation annuelle d'énergie(dans les conditions climatiques moyennes) for rumopvarmning det årlige energiforbrug(under gennemsnitlige klimaforhold) за отопление, годичного потребления на энергию(при средни климатични условия)	per il riscaldamento d'ambiente, il consumo annuo di energia(in condizioni climatiche medie) Para o aquecimento ambiente, o consumo anual de energia(em condições climáticas médias) pro vytápění – roční spotřeba energie za průměrných klimatických podmínek	para calentar espacios, el consumo anual de energía(en condiciones climáticas medias) για τη θέρμανση χώρου, η ετήσια κατανάλωση ενέργειας(ούπό μέσης κλιματικής συνθήκης)
9	For water heating, annual electricity consumption under average climate conditions voor waterverwarming, het jaarlijkse elektriciteitsverbruik(onder gemiddelde klimaatomstandigheden) vedenlämmitykseenä vuotuinen sähkökulutus(keskimääräisissä ilmastolo-olosuhteissa)	für die Warmwasserbereitung, den jährlichen Stromverbrauch bei durchschnittlichen Klimaverhältnissen For vannopvarmning, årlig elforbrukning(vid genomsnittliga klimatförhållanden) pro ohřevu vody – roční spotřeba elektrické energie za průměrných klimatických podmínek	pour le chauffage de l'eau, le consommateur annuelle d'électricité(dans les conditions climatiques moyennes) for vandopvarmning det årlige elforbrug(under gennemsnitlige klimaforhold) за подогревание на вода, годичното потребление(при средни климатични условия)	per il riscaldamento dell'acqua, il consumo annuo di elettricità(em condições climáticas médias) para o aquecimento de água, o consumo anual de electricidade(em condições climáticas médias) pro ohřevu vody – roční spotřeba elektrické energie za průměrných klimatických podmínek	para calentar agua, el consumo anual de electricidad(en condiciones climáticas medias) για την θέρμανση νερού, η ετήσια κατανάλωση ηλεκτρικής ενέργειας(ούπό μέσης κλιματικής συνθήκης)
10	Seasonal space heating energy efficiency under average climate conditions de seizoengebonden energie-efficiëntie voor ruimteverwarming(onder gemiddelde klimaatomstandigheden) tiläilyksen kaustitainen energiatehokkuus(keskimääräisissä ilmastolo-olosuhteissa)	die jahreszeitbedingte Raumheizungs-Energieeffizienz bei durchschnittlichen Klimaverhältnissen Säsongmedelverkningsgrad for rumopvarmning(vid genomsnittliga klimatförhållanden)	l'efficacité énergétique saisonnière pour le chauffage des locaux(dans les conditions climatiques moyennes) årsvirkingsgraden ved rumopvarmning(under genomsnittliga klimatförhold)	l'efficienza energetica stagionale di riscaldamento d'ambiente(in condizioni climatiche medie) A eficiência energética do aquecimento ambiente sazonal(em condições climáticas médias)	la eficiencia energética estacional de calefacción(en condiciones climáticas medias) η ενεργειακή απόδοση της εποχιακής θέρμανσης χώρου(ούπό μέσης κλιματικής συνθήκης)
11	Water heating energy efficiency under average climate conditions de energie-efficiëntie voor waterverwarming(onder gemiddelde klimaatomstandigheden) vedenlämmityksen energiatehokkuus(keskimääräisissä ilmastolo-olosuhteissa)	die Warmwasserbereitungs-Energieeffizienz bei durchschnittlichen Klimaverhältnissen energieeffektivitet ved vannopvarmning(vid genomsnittliga klimatförhållanden) energetická účinnost ohřevu vody za průměrných klimatických podmínek	l'efficacité énergétique pour le chauffage de l'eau(dans les conditions climatiques moyennes) energieeffektivitet ved vandopvarmning(under genomsnittliga klimatförhold) энергетическая эффективность при подогревание на вода(при средни климатични условия)	l'efficienza energetica di riscaldamento dell'acqua(in condizioni climatiche medie) a eficiência energética do aquecimento de água(em condições climáticas médias) efektywność energetyczna podgrzewania wody(w warunkach klimatu umiarkowanego)	la eficiencia energética del caudero de agua(en condiciones climáticas medias) η ενεργειακή απόδοση θέρμανσης νερού(ούπό μέσης κλιματικής συνθήκης)
12	Sound power level L <sub>WA</sub> indoor het geluidsvermogensniveau L <sub>WA</sub> binnen ääniteho L <sub>WA</sub> sisällä	die Schalleistungspegel L <sub>WA</sub> in Gebäuden Ljudeffektivitet L <sub>WA</sub> inomhus	le niveau de puissance acoustique L <sub>WA</sub> à l'intérieur lydeeffektivitet L <sub>WA</sub> i inde	il livello di potenza sonora L <sub>WA</sub> all'interno O nível de potência sonora L <sub>WA</sub> no interior	el nivel de potencia acústica L <sub>WA</sub> en interiores η στάθμη ηχητικής ισχύος L <sub>WA</sub> εσωτερικού χώρου
13	Work only during off-peak hours werken uitsluitend in de daluren toimimaan ainoastaan kulutusjuhpujen ulkopuolella	das ausschließliche Betrieb des Kombiheizgerätes zu Schwachlastzeiten divas utsklutet i de daluren provoz pouze mimo špičku	fonctionner uniquement pendant les heures de faible charge fungere uden for spidbelastningsperioder работи само в часовете извън върховото натоварване	funziona soltanto durante le ore meno cariche funcionar unicamente fora das horas de pico pracować jedynie w godzinach poza szczytowym obciążeniem	funcionar solamente durante las horas de baja demanda Λειτουργία μόνο εκτός των ωρών αιχμής
14	Rated heat output under colder climate conditions de nominale warmteafgifte, onder koudere klimaatomstandigheden nimeillämpöteho, kylmissä ilmastolo-olosuhteissa	die Wärmenennleistung bei kälteren Klimaverhältnissen Nominell avgivna värmeeffekt vid kallare klimatförhållanden jmenovitý tepelný výkon za chladnějších klimatických podmínek	la puissance thermique nominale, dans les conditions climatiques plus froides den nominale nytteeffekt under koldere klimaforhold	la potenza termica nominale, in condizioni climatiche più fredde A potencia calorífica nominal em condições climáticas mais frias	la potencia calorífica nominal en condiciones climáticas más frías η ονομαστική θερμική ισχύς υπό ψυχρότερες κλιματικές συνθήκες
15	Rated heat output under warmer climate conditions de nominale warmteafgifte, onder warmere klimaatomstandigheden nimeillämpöteho, lämpimissä ilmastolo-olosuhteissa	die Wärmenennleistung bei wärmeren Klimaverhältnissen Nominell avgivna värmeeffekt vid varmare klimatförhållanden jmenovitý tepelný výkon za teplejších klimatických podmínek	la puissance thermique nominale, dans les conditions climatiques plus chaudes den nominale nytteeffekt under varmere klimaforhold	la potenza termica nominale, in condizioni climatiche più calde A potencia calorífica nominal em condições climáticas mais quentes	la potencia calorífica nominal en condiciones climáticas más calidas η ονομαστική θερμική ισχύς υπό θερμότερες κλιματικές συνθήκες
16	For space heating, annual energy consumption under colder climate conditions voor ruimteverwarming, het jaarlijkse energiegebruik onder koudere klimaatomstandigheden tiläilykseenä vuotuinen energiankulutus kylmissä ilmastolo-olosuhteissa	für die Raumheizung, der jährliche Energieverbrauch bei kälteren Klimaverhältnissen For rumopvarmning, årlig energiförbrukning under kallare klimatförhållanden pro vytápění – roční spotřeba energie za chladnějších klimatických podmínek	pour le chauffage des locaux, la consommation annuelle d'énergie, dans les conditions climatiques plus froides for rumopvarmning det årlige energiforbrug under koldere klimaforhold за отопление, годичного потребления на энергию при по-холодны климатични условия	per il riscaldamento d'ambiente, il consumo annuo di energia, in condizioni climatiche più fredde Para o aquecimento ambiente, o consumo anual de energia em condições climáticas mais frias pro vytápění – roční spotřeba energie za chladnějších klimatických podmínek	para calentar espacios, el consumo anual de energía en condiciones climáticas más frías για θέρμανση χώρου, η ετήσια κατανάλωση ενέργειας υπό ψυχρότερες κλιματικές συνθήκες
17	For space heating, annual energy consumption under warmer climate conditions voor ruimteverwarming, het jaarlijkse energiegebruik onder warmere klimaatomstandigheden tiläilykseenä vuotuinen energiankulutus lämpimissä ilmastolo-olosuhteissa	für die Raumheizung, der jährliche Energieverbrauch bei wärmeren Klimaverhältnissen For rumopvarmning, årlig energiförbrukning under varmare klimatförhållanden pro vytápění – roční spotřeba energie za teplejších klimatických podmínek	pour le chauffage des locaux, la consommation annuelle d'énergie, dans les conditions climatiques plus chaudes for rumopvarmning det årlige energiforbrug under varmere klimaforhold за отопление, годичного потребление на энергию при по-топли климатични условия	per il riscaldamento d'ambiente, il consumo annuo di energia, in condizioni climatiche più calde Para o aquecimento ambiente, o consumo anual de energia em condições climáticas mais quentes pro vytápění – roční spotřeba energie za teplejších klimatických podmínek	para calentar espacios, el consumo anual de energía en condiciones climáticas más calidas για θέρμανση χώρου, η ετήσια κατανάλωση ενέργειας υπό θερμότερες κλιματικές συνθήκες
18	For water heating, annual energy consumption under colder climate conditions voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder koudere klimaatomstandigheden vedenlämmitykseenä vuotuinen sähkökulutus kylmissä ilmastolo-olosuhteissa	für die Warmwasserbereitung, der jährliche Stromverbrauch bei kälteren Klimaverhältnissen For vannopvarmning, årlig elforbrukning under kallare klimatförhållanden pro ohřevu vody – roční spotřeba elektrické energie za chladnějších klimatických podmínek	pour le chauffage de l'eau, le consommateur annuelle d'électricité, dans les conditions climatiques plus froides for vandopvarmning det årlige elforbrug under koldere klimaforhold за подогревание на вода, годичното потребление на електроенергия при по-студени климатични условия	per il riscaldamento dell'acqua, il consumo annuo di elettricità, in condizioni climatiche più fredde e più calde para o aquecimento de água, o consumo anual de electricidade em condições climáticas mais frias pro ohřevu vody – roční spotřeba elektrické energie za chladnějších klimatických podmínek	para calentar agua, el consumo anual de electricidad en condiciones climáticas más frías για θέρμανση νερού, η ετήσια κατανάλωση ηλεκτρικής ενέργειας υπό ψυχρότερες κλιματικές συνθήκες
19	For water heating, annual energy consumption under warmer climate conditions voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder warmere klimaatomstandigheden vedenlämmitykseenä vuotuinen sähkökulutus lämpimissä ilmastolo-olosuhteissa	für die Warmwasserbereitung, der jährliche Stromverbrauch bei wärmeren Klimaverhältnissen For vannopvarmning, årlig elforbrukning under varmare klimatförhållanden pro ohřevu vody – roční spotřeba elektrické energie za teplejších klimatických podmínek	pour le chauffage de l'eau, le consommateur annuelle d'électricité, dans les conditions climatiques plus chaudes for vandopvarmning det årlige elforbrug under varmere klimaforhold за подогревание на вода, годичното потребление на електроенергия при по-топли климатични условия	per il riscaldamento dell'acqua, il consumo annuo di elettricità, in condizioni climatiche più fredde e più calde para o aquecimento de água, o consumo anual de electricidade em condições climáticas mais quentes pro ohřevu vody – roční spotřeba elektrické energie za teplejších klimatických podmínek	para calentar agua, el consumo anual de electricidad en condiciones climáticas más calidas για θέρμανση νερού, η ετήσια κατανάλωση ηλεκτρικής ενέργειας υπό θερμότερες κλιματικές συνθήκες
20	Seasonal space heating energy efficiency under colder climate conditions de seizoengebonden energie-efficiëntie voor ruimteverwarming onder koudere klimaatomstandigheden tiläilyksen kaustitainen energiatehokkuus kylmissä ilmastolo-olosuhteissa	die jahreszeitbedingte Raumheizungs-Energieeffizienz bei kälteren Klimaverhältnissen Säsongmedelverkningsgrad for rumopvarmning under kallare klimatförhållanden sezonní energetická účinnost vytápění za chladnějších klimatických podmínek	l'efficacité énergétique saisonnière pour le chauffage des locaux, dans les conditions climatiques plus froides årsvirkingsgraden ved rumopvarmning under koldere klimaforhold sezonnata energijná effektivitet при отопление при по-студени климатични условия	l'efficienza energetica stagionale di riscaldamento d'ambiente in condizioni climatiche più fredde A eficiência energética do aquecimento ambiente sazonal em condições climáticas mais frias sezonnata efektywność energetyczna ogrzewania pomieszczeń w warunkach klimatu chłodnego	la eficiencia energética estacional de calefacción en condiciones climáticas más frías η ενεργειακή απόδοση της εποχιακής θέρμανσης χώρου υπό ψυχρότερες κλιματικές συνθήκες
21	Seasonal space heating energy efficiency under warmer climate conditions de seizoengebonden energie-efficiëntie voor ruimteverwarming onder warmere klimaatomstandigheden tiläilyksen kaustitainen energiatehokkuus lämpimissä ilmastolo-olosuhteissa	die jahreszeitbedingte Raumheizungs-Energieeffizienz bei wärmeren Klimaverhältnissen Säsongmedelverkningsgrad for rumopvarmning under varmare klimatförhållanden sezonní energetická účinnost vytápění za teplejších klimatických podmínek	l'efficacité énergétique saisonnière pour le chauffage des locaux, dans les conditions climatiques plus chaudes årsvirkingsgraden ved rumopvarmning under varmere klimaforhold sezonnata energijná effektivitet при отопление при по-топли климатични условия	l'efficienza energetica stagionale di riscaldamento d'ambiente in condizioni climatiche più calde A eficiência energética do aquecimento ambiente sazonal em condições climáticas mais quentes sezonnata efektywność energetyczna ogrzewania pomieszczeń w warunkach klimatu cieplego	la eficiencia energética estacional de calefacción en condiciones climáticas más calidas η ενεργειακή απόδοση της εποχιακής θέρμανσης χώρου υπό θερμότερες κλιματικές συνθήκες
22	Water heating energy efficiency under colder climate conditions de energie-efficiëntie voor waterverwarming onder koudere klimaatomstandigheden vedenlämmityksen energiatehokkuus kylmissä ilmastolo-olosuhteissa	die Warmwasserbereitungs-Energieeffizienz bei kälteren Klimaverhältnissen energieeffektivitet ved vannopvarmning under kallare klimatförhållanden energetická účinnost ohřevu vody za chladnějších klimatických podmínek	l'efficacité énergétique pour le chauffage de l'eau, dans les conditions climatiques plus froides energieeffektivitet ved vandopvarmning under koldere klimaforhold энергетическая эффективность при подогревание на вода при по-студени климатични условия	l'efficienza energetica di riscaldamento dell'acqua in condizioni climatiche più fredde a eficiência energética do aquecimento de água em condições climáticas mais frias efektywność energetyczna podgrzewania wody w warunkach klimatu chłodnego	la eficiencia energética de caudero de agua en condiciones climáticas más frías η ενεργειακή απόδοση της θέρμανσης νερού υπό ψυχρότερες κλιματικές συνθήκες
23	Water heating energy efficiency under warmer climate conditions de energie-efficiëntie voor waterverwarming onder warmere klimaatomstandigheden vedenlämmityksen energiatehokkuus lämpimissä ilmastolo-olosuhteissa	die Warmwasserbereitungs-Energieeffizienz bei wärmeren Klimaverhältnissen energieeffektivitet ved vannopvarmning under varmare klimatförhållanden energetická účinnost ohřevu vody za teplejších klimatických podmínek	l'efficacité énergétique pour le chauffage de l'eau, dans les conditions climatiques plus chaudes energieeffektivitet ved vandopvarmning under varmere klimaforhold энергетическая эффективность при подогревание на вода при по-топли климатични условия	l'efficienza energetica di riscaldamento dell'acqua in condizioni climatiche più calde a eficiência energética do aquecimento de água em condições climáticas mais quentes efektywność energetyczna podgrzewania wody w warunkach klimatu cieplego	la eficiencia energética de caudero de agua en condiciones climáticas más calidas η ενεργειακή απόδοση της θέρμανσης νερού υπό θερμότερες κλιματικές συνθήκες
24	Sound power level L <sub>WA</sub> outdoor het geluidsvermogensniveau L <sub>WA</sub> buiten ääniteho L <sub>WA</sub> ulkona	die Schalleistungspegel L <sub>WA</sub> im Freien Ljudeffektivitet L <sub>WA</sub> i utomhus	le niveau de puissance acoustique L <sub>WA</sub> à l'extérieur lydeeffektivitet L <sub>WA</sub> i lude	il livello di potenza sonora L <sub>WA</sub> all'esterno O nível de potência sonora L <sub>WA</sub> no exterior	el nivel de potencia acústica L <sub>WA</sub> en exteriores η στάθμη ηχητικής ισχύος L <sub>WA</sub> εξωτερικού χώρου

Model(s):	Outdoor unit:	PUMY-P112VKM5
	Indoor unit:	EHSC-***D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	11.2	kW	Seasonal space heating energy efficiency	$\eta_s$	121	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	9.9	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	1.80	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	6	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	3.05	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	5.6	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	4.20	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	6.9	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	5.83	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.96	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	9.9	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	1.80	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	7.7	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.58	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	55	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.040	kW	Rated heat output (*)	P <sub>sup</sub>	1.8	kW
Thermostat-off mode	P <sub>TO</sub>	0.040	kW				
Standby mode	P <sub>SB</sub>	0.040	kW	Type of energy input			
Crankcase heater mode	P <sub>CK</sub>	0.010	kW				

Other items			
Capacity control		variable	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/69	dB(A)
Annual energy consumption	Q <sub>HE</sub>	7387	kWh
Rated air flow rate, outdoors		6600	m <sup>3</sup> /h

For heat pump combination heater:			
Declared load profile		-	
Daily electricity consumption	Q <sub>elec</sub>	-	kWh
Annual electricity consumption	AEC	-	kWh
Water heating energy efficiency	$\eta_{wh}$	-	%

Contact details

MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS                      3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).  
(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUMY-P112VKM5
	Indoor unit:	EHSC-***D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	11.2	kW	Seasonal space heating energy efficiency	$\eta_s$	169	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	10.2	kW	Tj = - 7 °C	COPd	2.74	-
Degradation co-efficient (**)	Cdh	0.98	-				
Tj = + 2 °C	Pdh	6	kW	Tj = + 2 °C	COPd	4.24	-
Degradation co-efficient (**)	Cdh	0.97	-				
Tj = + 7 °C	Pdh	6.1	kW	Tj = + 7 °C	COPd	5.61	-
Degradation co-efficient (**)	Cdh	0.96	-				
Tj = +12 °C	Pdh	7.3	kW	Tj = +12 °C	COPd	7.22	-
Degradation co-efficient (**)	Cdh	0.96	-				
Tj = bivalent temperature	Pdh	10.2	kW	Tj = bivalent temperature	COPd	2.74	-
Tj = operation limit temperature	Pdh	7.9	kW	Tj = operation limit temperature	COPd	1.72	-
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	-	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	-	-
Bivalent temperature	Tbiv	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	55	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.040	kW	Rated heat output (*)	P <sub>sup</sub>	1.5	kW
Thermostat-off mode	P <sub>TO</sub>	0.040	kW				
Standby mode	P <sub>SB</sub>	0.040	kW	Type of energy input			
Crankcase heater mode	P <sub>CK</sub>	0.010	kW				

Other items			
Capacity control		variable	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/69	dB(A)
Annual energy consumption	Q <sub>HE</sub>	5341	kWh
Rated air flow rate, outdoors		6600	m <sup>3</sup> /h

For heat pump combination heater:			
Declared load profile		-	
Daily electricity consumption	Q <sub>elec</sub>	-	kW/h
Annual electricity consumption	AEC	-	kW/h
Water heating energy efficiency	$\eta_{wh}$	-	%

Contact details	
MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS	3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).  
(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUMY-P112VKM5
	Indoor unit:	EHSC-***D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	8.0	kW	Seasonal space heating energy efficiency	$\eta_s$	106	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	4.9	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	2.24	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	4.7	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	3.23	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	5.6	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	4.19	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	6.9	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	5.69	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.96	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	7.7	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	1.50	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	7.7	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.50	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	-20	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	55	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.040	kW	Rated heat output (*)	P <sub>sup</sub>	8.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.040	kW				
Standby mode	P <sub>SB</sub>	0.040	kW	Type of energy input			
Crankcase heater mode	P <sub>CK</sub>	0.010	kW				

Other items			
Capacity control		variable	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/69	dB(A)
Annual energy consumption	Q <sub>HE</sub>	7263	kWh
Rated air flow rate, outdoors		6600	m <sup>3</sup> /h

For heat pump combination heater:			
Declared load profile		-	
Daily electricity consumption	Q <sub>elec</sub>	-	kWh
Annual electricity consumption	AEC	-	kWh
Water heating energy efficiency	$\eta_{wh}$	-	%

Contact details	
MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS	3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).  
(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUMY-P112VKM5
	Indoor unit:	EHSC-***D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	8.0	kW	Seasonal space heating energy efficiency	$\eta_s$	133	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	4.9	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	2.77	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	5.2	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	4.18	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.96	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	6.1	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	5.34	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.96	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	7.2	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	6.72	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.96	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	7.7	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	1.69	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	7.7	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.69	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	-20	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	55	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.040	kW	Rated heat output (*)	P <sub>sup</sub>	8.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.040	kW				
Standby mode	P <sub>SB</sub>	0.040	kW	Type of energy input			
Crankcase heater mode	P <sub>CK</sub>	0.010	kW				

Other items				Rated air flow rate, outdoors	-	6600	m <sup>3</sup> /h
Capacity control		variable					
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/69	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	5844	kWh				

For heat pump combination heater:				Water heating energy efficiency	$\eta_{wh}$	-	%
Declared load profile		-					
Daily electricity consumption	Q <sub>elec</sub>	-	kW/h				
Annual electricity consumption	AEC	-	kW/h				

Contact details

MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS                      3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).  
(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUMY-P112VKM5
	Indoor unit:	EHSC-***D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	10.0	kW	Seasonal space heating energy efficiency	$\eta_s$	139	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	-	kW	Tj = - 7 °C	COPd	-	-
Degradation co-efficient (**)	Cdh	-	-				
Tj = + 2 °C	Pdh	10.2	kW	Tj = + 2 °C	COPd	1.51	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 7 °C	Pdh	6.4	kW	Tj = + 7 °C	COPd	2.97	-
Degradation co-efficient (**)	Cdh	0.98	-				
Tj = +12 °C	Pdh	6.7	kW	Tj = +12 °C	COPd	5.04	-
Degradation co-efficient (**)	Cdh	0.96	-				
Tj = bivalent temperature	Pdh	10.2	kW	Tj = bivalent temperature	COPd	1.51	-
Tj = operation limit temperature	Pdh	7.7	kW	Tj = operation limit temperature	COPd	1.50	-
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	-	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	-	-
Bivalent temperature	Tbiv	2	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	55	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.040	kW	Rated heat output (*)	P <sub>sup</sub>	0.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.040	kW				
Standby mode	P <sub>SB</sub>	0.040	kW	Type of energy input			
Crankcase heater mode	P <sub>CK</sub>	0.010	kW				

Other items			
Capacity control		variable	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/69	dB(A)
Annual energy consumption	Q <sub>HE</sub>	3746	kWh
Rated air flow rate, outdoors		6600	m <sup>3</sup> /h

For heat pump combination heater:			
Declared load profile		-	
Daily electricity consumption	Q <sub>elec</sub>	-	kW/h
Annual electricity consumption	AEC	-	kW/h
Water heating energy efficiency	$\eta_{wh}$	-	%

Contact details	
MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS	3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).  
(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.



Model(s):	Outdoor unit:	PUMY-P112VKM5
	Indoor unit:	EHSC-***D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	11.2	kW	Seasonal space heating energy efficiency	$\eta_s$	208	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	-	-
Degradation co-efficient (**)	C <sub>dh</sub>	-	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	11.2	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	2.51	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	7.2	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	4.85	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	7.2	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	6.67	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.96	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	11.2	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	2.51	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	7.9	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.63	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	2	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	55	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.040	kW	Rated heat output (*)	P <sub>sup</sub>	0.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.040	kW				
Standby mode	P <sub>SB</sub>	0.040	kW	Type of energy input			
Crankcase heater mode	P <sub>CK</sub>	0.010	kW				

Other items				Rated air flow rate, outdoors			
Capacity control		variable		-	6600	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/69	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	2830	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		-		$\eta_{wh}$	-	%	
Daily electricity consumption	Q <sub>elec</sub>	-	kW/h				
Annual electricity consumption	AEC	-	kW/h				

Contact details

MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS                      3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).  
(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.