



# ENERG

енергия · ενεργεια

Y IJA


IE IA



Indoor unit E\*ST20D-\*\*C (W)  
Outdoor unit PUHZ-SW75YAA (-BS)



**A<sup>++</sup>**

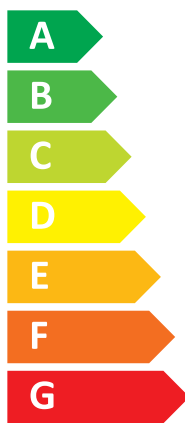

**A**

Two icons showing sound power levels. The top icon shows a speaker inside a house with the text "40 dB". The bottom icon shows a speaker outside a house with the text "58 dB".



A legend for power consumption with three colored squares: dark blue for "06 kW", medium blue for "07 kW", and light blue for "07 kW".

2015

811/2013

BH79J465H13

1	2	For medium-temperature application																				For low-temperature application																			
		3	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22
Outdoor unit	Indoor unit	Medium temperature application																								Low-temperature application															
		Seasonal space heating energy efficiency class																								Seasonal space heating energy efficiency class															
		Rated heat output under average climate conditions																								Rated heat output under average climate conditions															
		Water heating energy efficiency class																								Water heating energy efficiency class															
		Rated heat output under average climate conditions																								Rated heat output under average climate conditions															
		For space heating, annual energy consumption under average climate conditions																								For space heating, annual energy consumption under average climate conditions															
		For water heating, annual energy consumption under average climate conditions																								For water heating, annual energy consumption under average climate conditions															
		Seasonal space heating energy efficiency under average climate conditions																								Seasonal space heating energy efficiency under average climate conditions															
		Water heating energy efficiency under average climate conditions																								Water heating energy efficiency under average climate conditions															
		Sound power level, L <sub>w</sub> , indoor																								Sound power level, L <sub>w</sub> , outdoor															
		Work only during off-peak hours																								Work only during off-peak hours															
		Rated heat output under colder climate conditions																								Rated heat output under colder climate conditions															
		Rated heat output under warmer climate conditions																								Rated heat output under warmer climate conditions															
For space heating, annual energy consumption under colder climate conditions																								For space heating, annual energy consumption under colder climate conditions																	
For space heating, annual energy consumption under warmer climate conditions																								For space heating, annual energy consumption under warmer climate conditions																	
For water heating, annual energy consumption under colder climate conditions																								For water heating, annual energy consumption under colder climate conditions																	
For water heating, annual energy consumption under warmer climate conditions																								For water heating, annual energy consumption under warmer climate conditions																	
Seasonal space heating energy efficiency under warmer climate conditions																								Seasonal space heating energy efficiency under warmer climate conditions																	
Water heating energy efficiency under warmer climate conditions																								Water heating energy efficiency under warmer climate conditions																	
Sound power level, L <sub>w</sub> , outdoor																								Sound power level, L <sub>w</sub> , outdoor																	
Low-temperature application																								Low-temperature application																	
Seasonal space heating energy efficiency class																								Seasonal space heating energy efficiency class																	
Rated heat output under average climate conditions																								Rated heat output under average climate conditions																	
Water heating energy efficiency class																								Water heating energy efficiency class																	
Rated heat output under average climate conditions																								Rated heat output under average climate conditions																	
For space heating, annual energy consumption under average climate conditions																								For space heating, annual energy consumption under average climate conditions																	
For water heating, annual energy consumption under average climate conditions																								For water heating, annual energy consumption under average climate conditions																	
Seasonal space heating energy efficiency under average climate conditions																								Seasonal space heating energy efficiency under average climate conditions																	
Water heating energy efficiency under average climate conditions																								Water heating energy efficiency under average climate conditions																	
Sound power level, L <sub>w</sub> , indoor																								Sound power level, L <sub>w</sub> , indoor																	
Work only during off-peak hours																								Work only during off-peak hours																	
Rated heat output under warmer climate conditions																								Rated heat output under warmer climate conditions																	
Rated heat output under colder climate conditions																								Rated heat output under colder climate conditions																	
For space heating, annual energy consumption under warmer climate conditions																								For space heating, annual energy consumption under warmer climate conditions																	
For space heating, annual energy consumption under colder climate conditions																								For space heating, annual energy consumption under colder climate conditions																	
For water heating, annual energy consumption under warmer climate conditions																								For water heating, annual energy consumption under warmer climate conditions																	
For water heating, annual energy consumption under colder climate conditions																								For water heating, annual energy consumption under colder climate conditions																	
Seasonal space heating energy efficiency under warmer climate conditions																								Seasonal space heating energy efficiency under warmer climate conditions																	
Water heating energy efficiency under warmer climate conditions																								Water heating energy efficiency under warmer climate conditions																	
Sound power level, L <sub>w</sub> , outdoor																								Sound power level, L <sub>w</sub> , outdoor																	

	English	Dutch	French	Italian	Spanish
	Netherlands Outdoor unit	Svenska Cestina A464gerat Uterenshet	Dansk Български Unité extérieure	Portuguis Pakisi unita estera unita exterior	Espanol Espanol unidad exterior unidad interior
	1 buletariit Ulkoyksikko	Uljenshet Yrkösköni jenkko	Unités exterie Внешнее утро	unidad exterior unidad interior	Espanol jorvodo Espanol jorvodo
	2 bimeraut Ulkoyksikko	Uljenshet Yrkösköni jenkko	Unités exterie Внешнее утро	unidad exterior unidad interior	Espanol jorvodo Espanol jorvodo
	3 Medium-temperature application	Mittelpertenturtoimutus mediumpertenturtoimutus	Application à moyenne température mediumpertenturtoimutus	La aplicación de media temperatura a aplicación a media temperatura	La aplicación de media temperatura a aplicación a media temperatura
	4 Low-temperature application	Niedertemperaturanwendung lagentemperatuurtoimutus	Application à basse température lagentemperatuurtoimutus	La aplicación a bassa temperatura a aplicación a bassa temperatura	La aplicación a bassa temperatura a aplicación a bassa temperatura
	5 Seasonal space heating energy efficiency class	die Klasse für die jahreszeitbedingte Raumheizungs-Energieeffizienz saisonarbeitsbedingte energiefizienzklasse	la classe d'efficacité énergétique saisonnière Klassen für die jahreszeitbedingte und jahreszeitenunabhängige Energieeffizienz	A classe de eficiência energética sazonale a classe de eficiência energética sazonale	la clase de eficiencia energética sazonale la clase de eficiencia energética sazonale
	6 Water heating energy efficiency class	die Klasse für die Warmwasserbereitungs-Energieeffizienz energiefizienzklasse	la classe d'efficacité énergétique pour le chauffage de l'eau Klassen für die Warmwasserbereitungs-Energieeffizienz	la classe de efficacité énergétique pour le chauffage de l'eau Klassen für die Warmwasserbereitungs-Energieeffizienz	la clase de eficiencia energética del calentamiento de agua la clase de eficiencia energética del calentamiento de agua
	7 RATED heat output under average climate conditions	die Wärmeleistung bei durchschnittlichen Klimaverhältnissen Dien nominalia lämpötehoitovuoto keskimuuttuvissa olosuhteissa	puissance thermique nominale dans les conditions climatiques moyennes la puissance thermique nominale dans les conditions climatiques moyennes	A potência calorífica nominal em condições climáticas médias La potencia calorífica nominal en condiciones climáticas medias	la potencia calorífica nominal en condiciones climáticas medias la potencia calorífica nominal en condiciones climáticas medias
	8 For space heating, annual electricity consumption under average climate conditions	Für die Raumheizung, jährlicher Stromverbrauch bei durchschnittlichen Klimaverhältnissen	pour le chauffage de l'eau, la consommation annuelle d'électricité (dans les conditions climatiques moyennes)	Para el calentamiento de ambiente, el consumo anual de electricidad en condiciones climáticas medias w odniesieniu do ogrzewania pomieszczeń, roczne zużycie energii w warunkach klimatu umiarkowanego	para el calentamiento de ambiente, el consumo anual de electricidad en condiciones climáticas medias w odniesieniu do calefacción en condiciones climáticas medias
	9 For water heating, annual electricity consumption under average climate conditions	Für die Warmwasserbereitung, den jährlichen Stromverbrauch bei durchschnittlichen Klimaverhältnissen	pour le chauffage de l'eau, la consommation annuelle d'électricité (dans les conditions climatiques moyennes)	Para el calentamiento de agua, el consumo anual de electricidad en condiciones climáticas medias w odniesieniu do podgrzewania wody, roczne zużycie energii elektrycznej w warunkach klimatu umiarkowanego	para el calentamiento de agua, el consumo anual de electricidad en condiciones climáticas medias w odniesieniu do calefacción en condiciones climáticas medias
	10 Seasonal space heating energy efficiency under average climate conditions	die jahreszeitbedingte Raumheizungs-Energieeffizienz bei durchschnittlichen Klimaverhältnissen	l'efficacité énergétique saisonnière pour le chauffage de l'eau (dans les conditions climatiques moyennes)	A eficiência energética do aquecimento ambiente sazonal em condições climáticas médias la eficiencia energética sazonale en condiciones climáticas medias	la eficiencia energética sazonale en condiciones climáticas medias la eficiencia energética sazonale en condiciones climáticas medias
	11 Water heating energy efficiency under average climate conditions	die Wärmebereitungs-Energieeffizienz bei durchschnittlichen Klimaverhältnissen Energiefizienzklasse energiefizienzklasse	l'efficacité énergétique pour le chauffage de l'eau (dans les conditions climatiques moyennes)	A eficiencia energética del calentamiento de agua en condiciones climáticas medias la eficiencia energética del calentamiento de agua en condiciones climáticas medias	la eficiencia energética del calentamiento de agua en condiciones climáticas medias la eficiencia energética del calentamiento de agua en condiciones climáticas medias
	12 Sound power level L <sub>WA, indoor</sub>	Überschallleistung L <sub>WA, innen</sub>	puissance acoustique L <sub>WA, intérieur</sub>	O nivel de puterea sunetului L <sub>WA, în interior</sub>	el nivel de potencia acústica L <sub>WA, en interiores</sub>
	13 Work only during off-peak hours	Werkten uitsluitend in de daluren	fonctionner qu'en heures creuses	funcioner solamente durante las horas de baja demanda	funcioner solamente durante las horas de baja demanda
	14 Rated heat output under colder climate conditions	die Wärmeleistung bei kalteren Klimaverhältnissen Nominalia lämpötehoitovuoto kyläisissä olosuhteissa	la puissance thermique nominale dans les conditions climatiques plus froides la puissance thermique nominale dans les conditions climatiques plus froides	A potensia calorífica nominal em condições climáticas mais frias la potencia calorífica nominal en condiciones climáticas más frías	la potencia calorífica nominal em condições climáticas mais frias la potencia calorífica nominal en condiciones climáticas más frías
	15 Rated heat output under warmer climate conditions	die Wärmeleistung bei wärmeren Klimaverhältnissen Nominalia lämpötehoitovuoto lämpimissä olosuhteissa	la puissance thermique nominale dans les conditions climatiques plus chaudes la puissance thermique nominale dans les conditions climatiques plus chaudes	A potensia calorífica nominal em condições climáticas mais quentes la potencia calorífica nominal en condiciones climáticas más cálidas	la potencia calorífica nominal em condiciones climáticas más cálidas la potencia calorífica nominal en condiciones climáticas más cálidas
	16 For space heating, annual energy consumption under colder climate conditions	Für die Raumheizung, jährlicher Energieverbrauch bei kalteren Klimaverhältnissen	pour le chauffage de l'eau, la consommation annuelle d'énergie, dans les conditions climatiques plus froides	Para el calentamiento de ambiente, el consumo anual de energía en condiciones climáticas más frías w odniesieniu do ogrzewania pomieszczeń, roczne zużycie energii w warunkach klimatu chłodszego	para el calentamiento de ambiente, el consumo anual de energía en condiciones climáticas más frías w odniesieniu do calefacción en condiciones climáticas más frías
	17 For space heating, annual energy consumption under warmer climate conditions	Für die Raumheizung, jährlicher Energieverbrauch bei wärmeren Klimaverhältnissen	pour le chauffage de l'eau, la consommation annuelle d'énergie, dans les conditions climatiques plus chaudes	Para el calentamiento de ambiente, el consumo anual de energía en condiciones climáticas más cálidas w odniesieniu do calefacción en condiciones climáticas más cálidas	para el calentamiento de ambiente, el consumo anual de energía en condiciones climáticas más cálidas w odniesieniu do calefacción en condiciones climáticas más cálidas
	18 For water heating, annual energy consumption under warmer climate conditions	Für die Warmwasserbereitung, den jährlichen Stromverbrauch bei wärmeren Klimaverhältnissen	pour le chauffage de l'eau, la consommation annuelle d'électricité, dans les conditions climatiques plus chaudes	Para el calentamiento de agua, el consumo anual de electricidad en condiciones climáticas más cálidas w odniesieniu do podgrzewania wody, el consumo anual de electricidad en condiciones climáticas más cálidas	para el calentamiento de agua, el consumo anual de electricidad en condiciones climáticas más cálidas w odniesieniu do calefacción de agua, el consumo anual de electricidad en condiciones climáticas más cálidas
	19 For water heating, annual energy consumption under colder climate conditions	Für die Warmwasserbereitung, den jährlichen Stromverbrauch bei kalteren Klimaverhältnissen	pour le chauffage de l'eau, la consommation annuelle d'électricité, dans les conditions climatiques plus froides	Para el calentamiento de agua, el consumo anual de electricidad en condiciones climáticas más frías w odniesieniu do podgrzewamiento de agua, el consumo anual de electricidad en condiciones climáticas más frías	para el calentamiento de agua, el consumo anual de electricidad en condiciones climáticas más frías w odniesimiento do calefacción de agua, el consumo anual de electricidad en condiciones climáticas más frías
	20 Seasonal space heating energy efficiency under colder climate conditions	die jahreszeitbedingte Raumheizungs-Energieeffizienz bei kalteren Klimaverhältnissen	l'efficacité énergétique saisonnière pour le chauffage de l'eau, la consommation annuelle d'électricité, dans les conditions climatiques plus froides	A eficiência energética do aquecimento ambiente sazonal em condições climáticas mais frias la eficiencia energética sazonale en condiciones climáticas más frías	la eficiencia energética sazonale en condiciones climáticas más frías la eficiencia energética sazonale en condiciones climáticas más frías
	21 Seasonal space heating energy efficiency under warmer climate conditions	die jahreszeitbedingte Raumheizungs-Energieeffizienz bei wärmeren Klimaverhältnissen	l'efficacité énergétique saisonnière pour le chauffage de l'eau, dans les conditions climatiques plus chaudes	A eficiencia energética do aquecimento ambiente sazonal em condições climáticas mais quentes la eficiencia energética sazonale en condiciones climáticas más cálidas	la eficiencia energética sazonale en condiciones climáticas más cálidas la eficiencia energética sazonale en condiciones climáticas más cálidas
	22 Water heating energy efficiency under colder climate conditions	die Wärmebereitungs-Energieeffizienz bei kalteren Klimaverhältnissen Energiefizienzklasse energiefizienzklasse	l'efficacité énergétique pour le chauffage de l'eau, dans les conditions climatiques plus froides	la eficiencia energética del calentamiento de agua en condiciones climáticas más frías energía para el calentamiento de agua en condiciones climáticas más frías	la eficiencia energética del calentamiento de agua en condiciones climáticas más frías energía para el calentamiento de agua en condiciones climáticas más frías
	23 Water heating energy efficiency under warmer climate conditions	die Wärmebereitungs-Energieeffizienz bei wärmeren Klimaverhältnissen Energiefizienzklasse energiefizienzklasse	l'efficacité énergétique pour le chauffage de l'eau, dans les conditions climatiques plus chaudes	la eficiencia energética del calentamiento de agua en condiciones climáticas más cálidas energía para el calentamiento de agua en condiciones climáticas más cálidas	la eficiencia energética del calentamiento de agua en condiciones climáticas más cálidas energía para el calentamiento de agua en condiciones climáticas más cálidas
	24 Sound power level L <sub>WA, outdoor</sub>	Überschallleistung L <sub>WA, außen</sub>	puissance acoustique L <sub>WA, extérieur</sub>	O nivel de puterea sunetului L <sub>WA, în exterior</sub>	el nivel de potencia acústica L <sub>WA, en exteriores</sub>

Model(s):	Outdoor unit:	PUHZ-SW75YAA(-BS)
	Indoor unit:	EHST20D-VM2C2
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.1	kW	Seasonal space heating energy efficiency	$\eta_s$	128	%
Declared capacity for heating for part load at indoor <input type="checkbox"/> temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	6.3	kW	Tj = - 7 °C	COPd	2.04	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 2 °C	Pdh	3.8	kW	Tj = + 2 °C	COPd	3.23	-
Degradation co-efficient (**)	Cdh	0.98	-				
Tj = + 7 °C	Pdh	2.9	kW	Tj = + 7 °C	COPd	4.59	-
Degradation co-efficient (**)	Cdh	0.98	-				
Tj = +12 °C	Pdh	2.8	kW	Tj = +12 °C	COPd	6.10	-
Degradation co-efficient (**)	Cdh	0.95	-				
Tj = bivalent temperature	Pdh	6.3	kW	Tj = bivalent temperature	COPd	2.04	-
Tj = operation limit temperature	Pdh	5.6	kW	Tj = operation limit temperature	COPd	1.37	-
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	-	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	-	-
Bivalent temperature	Tbiv	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.022	kW	Rated heat output (*)	P <sub>sup</sub>	1.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.022	kW				
Standby mode	P <sub>SB</sub>	0.022	kW	Type of energy input			
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items			
Capacity control		variable	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/58	dB(A)
Annual energy consumption	Q <sub>HE</sub>	4329	kWh
Rated air flow rate, outdoors		2660	m <sup>3</sup> /h

For heat pump combination heater:			
Declared load profile		L	
Daily electricity consumption	Q <sub>elec</sub>	3.400	kWh
Annual electricity consumption	AEC	751	kWh
Water heating energy efficiency	$\eta_{wh}$	145	%

Contact details	
MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS	3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).  
(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75YAA(-BS)
	Indoor unit:	EHST20D-VM2C2
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.2	kW	Seasonal space heating energy efficiency	$\eta_s$	160	%
Declared capacity for heating for part load at indoor <input type="checkbox"/> temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	6.4	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	2.43	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	3.9	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	4.16	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	2.6	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	5.62	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.95	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	3.1	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	7.93	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.94	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	6.4	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	2.43	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	5.6	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.30	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.022	kW	Rated heat output (*)	P <sub>sup</sub>	1.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.022	kW				
Standby mode	P <sub>SB</sub>	0.022	kW	Type of energy input			
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control		variable		-	2660	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/58	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	3507	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		L		$\eta_{wh}$	145	%	
Daily electricity consumption	Q <sub>elec</sub>	3.400	kW/h				
Annual electricity consumption	AEC	751	kW/h				

Contact details

MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS                      3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).  
(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75YAA(-BS)
	Indoor unit:	EHST20D-VM2C2
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.0	kW	Seasonal space heating energy efficiency	$\eta_s$	106	%
Declared capacity for heating for part load at indoor <input type="checkbox"/> temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	3.6	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	2.37	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	2.2	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	3.24	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.96	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	2.5	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	4.70	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.95	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	3.0	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	6.74	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.94	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	5.7	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	1.30	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	5.6	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.30	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	-20	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.022	kW	Rated heat output (*)	P <sub>sup</sub>	6.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.022	kW				
Standby mode	P <sub>SB</sub>	0.022	kW	Type of energy input			
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control		variable		-	2660	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/58	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	5169	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		L		$\eta_{wh}$	123	%	
Daily electricity consumption	Q <sub>elec</sub>	4.000	kW/h				
Annual electricity consumption	AEC	877	kW/h				

Contact details

MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS                      3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).  
(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75YAA(-BS)
	Indoor unit:	EHST20D-VM2C2
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.0	kW	Seasonal space heating energy efficiency	$\eta_s$	128	%
Declared capacity for heating for part load at indoor <input type="checkbox"/> temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	3.6	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	2.85	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	2.4	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	4.14	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.96	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	2.6	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	5.82	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.94	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	3.1	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	7.81	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.94	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	5.7	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	1.56	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	5.6	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.30	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	-20	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.022	kW	Rated heat output (*)	P <sub>sup</sub>	6.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.022	kW				
Standby mode	P <sub>SB</sub>	0.022	kW	Type of energy input			
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control		variable		-	2660	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/58	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	4265	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		L		$\eta_{wh}$	123	%	
Daily electricity consumption	Q <sub>elec</sub>	4.000	kW/h				
Annual electricity consumption	AEC	877	kW/h				

Contact details

MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS                      3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).  
(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75YAA(-BS)
	Indoor unit:	EHST20D-VM2C2
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.1	kW	Seasonal space heating energy efficiency	$\eta_s$	153	%
Declared capacity for heating for part load at indoor <input type="checkbox"/> temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	-	-
Degradation co-efficient (**)	C <sub>dh</sub>	-	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	7.1	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	1.98	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	4.6	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	3.19	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	2.9	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	5.70	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.95	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	6.3	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	1.94	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	5.6	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.30	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.022	kW	Rated heat output (*)	P <sub>sup</sub>	0.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.022	kW				
Standby mode	P <sub>SB</sub>	0.022	kW	Type of energy input			
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items			
Capacity control		variable	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/58	dB(A)
Annual energy consumption	Q <sub>HE</sub>	2358	kWh
Rated air flow rate, outdoors		2660	m <sup>3</sup> /h

For heat pump combination heater:			
Declared load profile		L	
Daily electricity consumption	Q <sub>elec</sub>	3.100	kWh
Annual electricity consumption	AEC	678	kWh
Water heating energy efficiency	$\eta_{wh}$	161	%

Contact details	
MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS	3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).  
(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.



Model(s):	Outdoor unit:	PUHZ-SW75YAA(-BS)
	Indoor unit:	EHST20D-VM2C2
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.2	kW	Seasonal space heating energy efficiency	$\eta_s$	215	%
Declared capacity for heating for part load at indoor <input type="checkbox"/> temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	-	-
Degradation co-efficient (**)	C <sub>dh</sub>	-	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	7.2	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	3.13	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	4.6	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	4.79	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	3.1	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	7.57	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.94	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	6.4	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	2.43	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	5.6	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.30	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.022	kW	Rated heat output (*)	P <sub>sup</sub>	0.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.022	kW				
Standby mode	P <sub>SB</sub>	0.022	kW	Type of energy input			
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control		variable		-	2660	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/58	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	1682	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		L		$\eta_{wh}$	161	%	
Daily electricity consumption	Q <sub>elec</sub>	3.100	kW/h				
Annual electricity consumption	AEC	678	kW/h				

Contact details

MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS                      3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).  
(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75YAA(-BS)
	Indoor unit:	ERST20D-VM2C2
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.1	kW	Seasonal space heating energy efficiency	$\eta_s$	132	%
Declared capacity for heating for part load at indoor <input type="checkbox"/> temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	6.3	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	2.04	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	3.8	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	3.23	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	2.9	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	4.59	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	2.8	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	6.10	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.95	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	6.3	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	2.04	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	5.6	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.37	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.022	kW	Rated heat output (*)	P <sub>sup</sub>	1.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.022	kW				
Standby mode	P <sub>SB</sub>	0.022	kW	Type of energy input			
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control		variable				2660	m <sup>3</sup> /h
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/58	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	4329	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		L		$\eta_{wh}$		145	%
Daily electricity consumption	Q <sub>elec</sub>	3.400	kW/h				
Annual electricity consumption	AEC	751	kW/h				

Contact details

MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS                      3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).  
(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75YAA(-BS)
	Indoor unit:	ERST20D-VM2C2
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.2	kW	Seasonal space heating energy efficiency	$\eta_s$	165	%
Declared capacity for heating for part load at indoor <input type="checkbox"/> temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	6.4	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	2.43	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	3.9	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	4.16	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	2.6	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	5.62	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.95	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	3.1	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	7.93	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.94	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	6.4	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	2.43	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	5.6	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.30	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.022	kW	Rated heat output (*)	P <sub>sup</sub>	1.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.022	kW				
Standby mode	P <sub>SB</sub>	0.022	kW	Type of energy input			
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control		variable		-	2660	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/58	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	3507	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		L		$\eta_{wh}$	145	%	
Daily electricity consumption	Q <sub>elec</sub>	3.400	kWh				
Annual electricity consumption	AEC	751	kWh				

Contact details			
MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS		3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan	

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).  
(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75YAA(-BS)
	Indoor unit:	ERST20D-VM2C2
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.0	kW	Seasonal space heating energy efficiency	$\eta_s$	109	%
Declared capacity for heating for part load at indoor <input type="checkbox"/> temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	3.6	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	2.37	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	2.2	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	3.24	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.96	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	2.5	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	4.70	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.95	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	3.0	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	6.74	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.94	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	5.7	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	1.30	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	5.6	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.30	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	-20	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.022	kW	Rated heat output (*)	P <sub>sup</sub>	6.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.022	kW				
Standby mode	P <sub>SB</sub>	0.022	kW	Type of energy input			
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control		variable		-	2660	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/58	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	5169	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		L		$\eta_{wh}$	123	%	
Daily electricity consumption	Q <sub>elec</sub>	4.000	kW/h				
Annual electricity consumption	AEC	877	kW/h				

Contact details			
MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS		3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan	

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).  
(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75YAA(-BS)
	Indoor unit:	ERST20D-VM2C2
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.0	kW	Seasonal space heating energy efficiency	$\eta_s$	132	%
Declared capacity for heating for part load at indoor <input type="checkbox"/> temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	3.6	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	2.85	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	2.4	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	4.14	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.96	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	2.6	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	5.82	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.94	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	3.1	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	7.81	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.94	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	5.7	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	1.56	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	5.6	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.30	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	-20	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.022	kW	Rated heat output (*)	P <sub>sup</sub>	6.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.022	kW				
Standby mode	P <sub>SB</sub>	0.022	kW	Type of energy input			
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control		variable		-	2660	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/58	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	4265	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		L		$\eta_{wh}$	123	%	
Daily electricity consumption	Q <sub>elec</sub>	4.000	kW/h				
Annual electricity consumption	AEC	877	kW/h				

Contact details			
MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS		3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan	

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).  
(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75YAA(-BS)
	Indoor unit:	ERST20D-VM2C2
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.1	kW	Seasonal space heating energy efficiency	$\eta_s$	158	%
Declared capacity for heating for part load at indoor <input type="checkbox"/> temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	-	-
Degradation co-efficient (**)	C <sub>dh</sub>	-	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	7.1	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	1.98	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	4.6	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	3.19	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	2.9	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	5.70	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.95	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	6.3	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	1.94	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	5.6	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.30	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.022	kW	Rated heat output (*)	P <sub>sup</sub>	0.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.022	kW				
Standby mode	P <sub>SB</sub>	0.022	kW	Type of energy input			
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors	-	2660	m <sup>3</sup> /h
Capacity control		variable					
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/58	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	2358	kWh				

For heat pump combination heater:				Water heating energy efficiency	$\eta_{wh}$	161	%
Declared load profile		L					
Daily electricity consumption	Q <sub>elec</sub>	3.100	kW/h				
Annual electricity consumption	AEC	678	kW/h				

Contact details

MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS                      3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).  
(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75YAA(-BS)
	Indoor unit:	ERST20D-VM2C2
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.2	kW	Seasonal space heating energy efficiency	$\eta_s$	225	%
Declared capacity for heating for part load at indoor <input type="checkbox"/> temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	-	-
Degradation co-efficient (**)	C <sub>dh</sub>	-	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	7.2	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	3.13	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	4.6	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	4.79	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	3.1	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	7.57	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.94	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	6.4	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	2.43	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	5.6	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.30	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.022	kW	Rated heat output (*)	P <sub>sup</sub>	0.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.022	kW				
Standby mode	P <sub>SB</sub>	0.022	kW	Type of energy input			
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control		variable		-	2660	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/58	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	1682	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		L		$\eta_{wh}$	161	%	
Daily electricity consumption	Q <sub>elec</sub>	3.100	kW/h				
Annual electricity consumption	AEC	678	kW/h				

Contact details

MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS                      3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).  
(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.