



ENERG
енергия · ενεργεια

Y IJA
IE IA




Indoor unit E*PX-****D
Outdoor unit PUZ-WM112VAA(-BS)



55 °C

35 °C

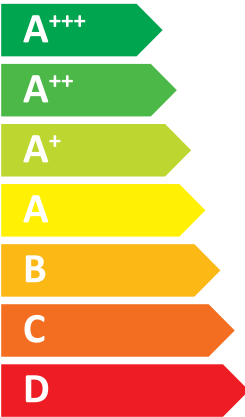

A++

A+++

40 dB

60 dB

09	10
10	10
10	10
kW	kW

2019

811/2013

BH79V004H53

English	German	French	Italian	Spanish	Español
Nederlands	Nederlands	Português	Português	Português	Português
suomi	Suomi	Portki	Portki	Portki	Portki
Outdoor unit	Außengerät	unità esterne	unità esterne	unidad exterior	unidad exterior
1	Бульонит	Централ ентит	централ ентит	Ентернал унит	Ентернал унит
Цкоуьскко	Verkoel eenheid	Външно тло	внешное тло	унитна интент	унитна интент
Indoor unit	Innenunit	unità interne	unità interne	unidad interior	unidad interior
Binnenunit	Innenheit	interne eenheid	interne eenheid	Ентернал унит	Ентернал унит
2	Sisällykskäyttö	Внутреннее тло	внутреннее тло	Ентернал унит	Ентернал унит
Medium-temperature application	Mitteltemperaturanwendung	Application à moyenne température	Application à moyenne température	la aplicación de media temperatura	la aplicación de media temperatura
3	Indienentpraktijk-toepassing	medium-temperatuur applicatie	medium-temperatuur applicatie	la aplicación de media temperatura	la aplicación de media temperatura
Kesäilmastoilman sovellus	Sidermediumtoepassing	среднетемпературно приложение	среднетемпературно приложение	la aplicación de baja temperatura	la aplicación de baja temperatura
4	Low-temperature application	Application à basse température	Application à basse température	la aplicación de baja temperatura	la aplicación de baja temperatura
Laagerpraktijk-toepassing	lage temperatuur applicatie	laagerpraktijktoepassing	laagerpraktijktoepassing	la aplicación de muy baja temperatura	la aplicación de muy baja temperatura
5	Seasonal space heating energy efficiency class	la classe de efficacité énergétique saisonnière	la classe de efficacité énergétique saisonnière	la clase de eficiencia energética estacional	la clase de eficiencia energética estacional
de seizoenafhankelijke energie-efficiëntieklasse voor ruimteverwarming	de seizoenafhankelijke energie-efficiëntieklasse voor ruimteverwarming	la classe d'efficacité énergétique saisonnière pour le chauffage des locaux	la classe d'efficacité énergétique saisonnière pour le chauffage des locaux	la clase de eficiencia energética estacional de calefacción	la clase de eficiencia energética estacional de calefacción
6	Water heating energy efficiency class	la classe de efficacité énergétique pour le chauffage de l'eau	la classe de efficacité énergétique pour le chauffage de l'eau	la clase de eficiencia energética del calentamiento de agua	la clase de eficiencia energética del calentamiento de agua
de energie-efficiëntieklasse voor waterverwarming	de energie-efficiëntieklasse voor waterverwarming	la classe d'efficacité énergétique pour le chauffage de l'eau	la classe d'efficacité énergétique pour le chauffage de l'eau	la clase de eficiencia energética del calentamiento de agua	la clase de eficiencia energética del calentamiento de agua
7	Overgevoel gevoeligheidsprofiel	Profil de sensibilité	Profil de sensibilité	Perfil de sensibilidad	Perfil de sensibilidad
Overgevoel gevoeligheidsprofiel	Dekelbaar gevoeligheidsprofiel	Profil de sensibilité	Profil de sensibilité	Perfil de sensibilidad	Perfil de sensibilidad
8	Water heating energy efficiency class	la classe de efficacité énergétique pour le chauffage de l'eau	la classe de efficacité énergétique pour le chauffage de l'eau	la clase de eficiencia energética del calentamiento de agua	la clase de eficiencia energética del calentamiento de agua
de pompele vaatwafelgroefde gemiddelde klimaatstandgroefde	de pompele vaatwafelgroefde gemiddelde klimaatstandgroefde	la classe d'efficacité énergétique pour le chauffage de l'eau	la classe d'efficacité énergétique pour le chauffage de l'eau	la clase de eficiencia energética del calentamiento de agua	la clase de eficiencia energética del calentamiento de agua
9	For space heating, annual energy consumption under average climate conditions	pour le chauffage des locaux, la consommation annuelle d'énergie dans les conditions moyennes	pour le chauffage des locaux, la consommation annuelle d'énergie dans les conditions moyennes	para calentar espacios, el consumo anual de energía en condiciones medias	para calentar espacios, el consumo anual de energía en condiciones medias
voor ruimteverwarming, het jaarlijkse energieverbruik onder gemiddelde klimaatstandgroefde	voor ruimteverwarming, het jaarlijkse energieverbruik onder gemiddelde klimaatstandgroefde	pour le chauffage des locaux, la consommation annuelle d'énergie dans les conditions moyennes	pour le chauffage des locaux, la consommation annuelle d'énergie dans les conditions moyennes	para calentar espacios, el consumo anual de energía en condiciones medias	para calentar espacios, el consumo anual de energía en condiciones medias
10	For water heating, annual electricity consumption under average climate conditions	pour le chauffage de l'eau, la consommation annuelle d'électricité dans les conditions moyennes	pour le chauffage de l'eau, la consommation annuelle d'électricité dans les conditions moyennes	para calentar agua, el consumo anual de electricidad en condiciones medias	para calentar agua, el consumo anual de electricidad en condiciones medias
voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder gemiddelde klimaatstandgroefde	voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder gemiddelde klimaatstandgroefde	pour le chauffage de l'eau, la consommation annuelle d'électricité dans les conditions moyennes	pour le chauffage de l'eau, la consommation annuelle d'électricité dans les conditions moyennes	para calentar agua, el consumo anual de electricidad en condiciones medias	para calentar agua, el consumo anual de electricidad en condiciones medias
11	de seizoenafhankelijke energie-efficiëntie voor ruimteverwarming onder gemiddelde klimaatstandgroefde	la classe d'efficacité énergétique pour le chauffage des locaux dans les conditions moyennes	la classe d'efficacité énergétique pour le chauffage des locaux dans les conditions moyennes	la eficiencia energética estacional de calefacción en condiciones medias	la eficiencia energética estacional de calefacción en condiciones medias
12	Water heating energy efficiency under average climate conditions	efficacité énergétique pour le chauffage de l'eau dans les conditions moyennes	efficacité énergétique pour le chauffage de l'eau dans les conditions moyennes	la eficiencia energética del calentamiento de agua en condiciones medias	la eficiencia energética del calentamiento de agua en condiciones medias
de energie-efficiëntie voor waterverwarming onder gemiddelde klimaatstandgroefde	de energie-efficiëntie voor waterverwarming onder gemiddelde klimaatstandgroefde	efficacité énergétique pour le chauffage de l'eau dans les conditions moyennes	efficacité énergétique pour le chauffage de l'eau dans les conditions moyennes	la eficiencia energética del calentamiento de agua en condiciones medias	la eficiencia energética del calentamiento de agua en condiciones medias
13	het geluidstermopreventieve L _{WA} -niveau	le niveau de prévention acoustique L _{WA} en situation	le niveau de prévention acoustique L _{WA} à l'installation	el nivel de potencia acústica L _{WA} en condiciones de uso	el nivel de potencia acústica L _{WA} en condiciones de uso
14	het geluidstermopreventieve L _{WA} -niveau	le niveau de prévention acoustique L _{WA} en situation	le niveau de prévention acoustique L _{WA} à l'installation	el nivel de potencia acústica L _{WA} en condiciones de uso	el nivel de potencia acústica L _{WA} en condiciones de uso
15	de pompele vaatwafelgroefde gemiddelde klimaatstandgroefde	la classe d'efficacité énergétique pour le chauffage de l'eau dans les conditions moyennes	la classe d'efficacité énergétique pour le chauffage de l'eau dans les conditions moyennes	la eficiencia energética estacional de calefacción en condiciones medias	la eficiencia energética estacional de calefacción en condiciones medias
16	Water heating energy efficiency under average climate conditions	efficacité énergétique pour le chauffage de l'eau dans les conditions moyennes	efficacité énergétique pour le chauffage de l'eau dans les conditions moyennes	la eficiencia energética del calentamiento de agua en condiciones medias	la eficiencia energética del calentamiento de agua en condiciones medias
17	de pompele vaatwafelgroefde gemiddelde klimaatstandgroefde	la classe d'efficacité énergétique pour le chauffage de l'eau dans les conditions moyennes	la classe d'efficacité énergétique pour le chauffage de l'eau dans les conditions moyennes	la eficiencia energética estacional de calefacción en condiciones medias	la eficiencia energética estacional de calefacción en condiciones medias
18	For space heating, annual energy consumption under warmer climate conditions	pour le chauffage des locaux, la consommation annuelle d'énergie dans les conditions plus chaudes	pour le chauffage des locaux, la consommation annuelle d'énergie dans les conditions plus chaudes	para calentar espacios, el consumo anual de energía en condiciones más calidas	para calentar espacios, el consumo anual de energía en condiciones más calidas
voor ruimteverwarming, het jaarlijkse energieverbruik onder warmere klimaatstandgroefde	voor ruimteverwarming, het jaarlijkse energieverbruik onder warmere klimaatstandgroefde	pour le chauffage des locaux, la consommation annuelle d'énergie dans les conditions plus chaudes	pour le chauffage des locaux, la consommation annuelle d'énergie dans les conditions plus chaudes	para calentar espacios, el consumo anual de energía en condiciones más calidas	para calentar espacios, el consumo anual de energía en condiciones más calidas
19	Water heating energy efficiency under colder climate conditions	pour le chauffage de l'eau, la consommation annuelle d'énergie dans les conditions plus froides	pour le chauffage de l'eau, la consommation annuelle d'énergie dans les conditions plus froides	para calentar agua, el consumo anual de electricidad en condiciones más frías	para calentar agua, el consumo anual de electricidad en condiciones más frías
voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder koude klimaatstandgroefde	voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder koude klimaatstandgroefde	pour le chauffage de l'eau, la consommation annuelle d'énergie dans les conditions plus froides	pour le chauffage de l'eau, la consommation annuelle d'énergie dans les conditions plus froides	para calentar agua, el consumo anual de electricidad en condiciones más frías	para calentar agua, el consumo anual de electricidad en condiciones más frías
20	Water heating energy efficiency under warmer climate conditions	pour le chauffage des locaux, la consommation annuelle d'énergie dans les conditions plus chaudes	pour le chauffage des locaux, la consommation annuelle d'énergie dans les conditions plus chaudes	para calentar espacios, el consumo anual de energía en condiciones más calidas	para calentar espacios, el consumo anual de energía en condiciones más calidas
voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder warmere klimaatstandgroefde	voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder warmere klimaatstandgroefde	pour le chauffage des locaux, la consommation annuelle d'énergie dans les conditions plus chaudes	pour le chauffage des locaux, la consommation annuelle d'énergie dans les conditions plus chaudes	para calentar espacios, el consumo anual de energía en condiciones más calidas	para calentar espacios, el consumo anual de energía en condiciones más calidas
21	de seizoenafhankelijke energie-efficiëntie voor ruimteverwarming onder koude klimaatstandgroefde	la classe d'efficacité énergétique pour le chauffage des locaux dans les conditions moyennes	la classe d'efficacité énergétique pour le chauffage des locaux dans les conditions moyennes	la eficiencia energética estacional de calefacción en condiciones medias	la eficiencia energética estacional de calefacción en condiciones medias
22	Water heating energy efficiency under colder climate conditions	pour le chauffage de l'eau, la consommation annuelle d'énergie dans les conditions plus froides	pour le chauffage de l'eau, la consommation annuelle d'énergie dans les conditions plus froides	para calentar agua, el consumo anual de electricidad en condiciones más frías	para calentar agua, el consumo anual de electricidad en condiciones más frías
23	de energie-efficiëntie voor waterverwarming onder koude klimaatstandgroefde	la classe d'efficacité énergétique pour le chauffage de l'eau dans les conditions moyennes	la classe d'efficacité énergétique pour le chauffage de l'eau dans les conditions moyennes	la eficiencia energética estacional de calefacción en condiciones medias	la eficiencia energética estacional de calefacción en condiciones medias
24	Water heating energy efficiency under warmer climate conditions	pour le chauffage des locaux, la consommation annuelle d'énergie dans les conditions plus chaudes	pour le chauffage des locaux, la consommation annuelle d'énergie dans les conditions plus chaudes	para calentar espacios, el consumo anual de energía en condiciones más calidas	para calentar espacios, el consumo anual de energía en condiciones más calidas
de energie-efficiëntie voor waterverwarming onder warmere klimaatstandgroefde	de energie-efficiëntie voor waterverwarming onder warmere klimaatstandgroefde	pour le chauffage des locaux, la consommation annuelle d'énergie dans les conditions plus chaudes	pour le chauffage des locaux, la consommation annuelle d'énergie dans les conditions plus chaudes	para calentar espacios, el consumo anual de energía en condiciones más calidas	para calentar espacios, el consumo anual de energía en condiciones más calidas
25	het geluidstermopreventieve L _{WA} -niveau	le niveau de prévention acoustique L _{WA} en situation	le niveau de prévention acoustique L _{WA} à l'installation	el nivel de potencia acústica L _{WA} en condiciones de uso	el nivel de potencia acústica L _{WA} en condiciones de uso
het geluidstermopreventieve L _{WA} -niveau	het geluidstermopreventieve L _{WA} -niveau	le niveau de prévention acoustique L _{WA} en situation	le niveau de prévention acoustique L _{WA} à l'installation	el nivel de potencia acústica L _{WA} en condiciones de uso	el nivel de potencia acústica L _{WA} en condiciones de uso

Model(s):	Outdoor unit:	PUZ-WM112VAA(-BS)
	Indoor unit:	EHPX-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	10.0	kW	Seasonal space heating energy efficiency	η_s	134	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	8.8	kW	T _j = - 7 °C	COP _d	2.21	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	5.4	kW	T _j = + 2 °C	COP _d	3.30	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	5.2	kW	T _j = + 7 °C	COP _d	4.60	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = +12 °C	P _{dh}	4.7	kW	T _j = +12 °C	COP _d	6.35	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = bivalent temperature	P _{dh}	8.8	kW	T _j = bivalent temperature	COP _d	2.21	-
T _j = operation limit temperature	P _{dh}	8.7	kW	T _j = operation limit temperature	COP _d	1.60	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	1.2	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P _{CK}	0.000	kW				

Other items			
Capacity control		variable	
Sound power level, indoors/outdoors	L _{WA}	40/60	dB(A)
Annual energy consumption	Q _{HE}	5905	kWh
Rated air flow rate, outdoors		3170	m ³ /h

For heat pump combination heater:			
Declared load profile		-	
Daily electricity consumption	Q _{elec}	-	kWh
Annual electricity consumption	AEC	-	kWh
Water heating energy efficiency	η_{wh}	-	%

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUZ-WM112VAA(-BS)
	Indoor unit:	EHPX-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	10.0	kW	Seasonal space heating energy efficiency	η_s	191	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	8.8	kW	T _j = - 7 °C	COP _d	3.31	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	5.7	kW	T _j = + 2 °C	COP _d	4.56	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = + 7 °C	P _{dh}	4.9	kW	T _j = + 7 °C	COP _d	6.81	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = +12 °C	P _{dh}	4.6	kW	T _j = +12 °C	COP _d	9.20	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = bivalent temperature	P _{dh}	8.9	kW	T _j = bivalent temperature	COP _d	3.32	-
T _j = operation limit temperature	P _{dh}	8.7	kW	T _j = operation limit temperature	COP _d	1.60	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	1.1	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P _{CK}	0.000	kW				

Other items			
Capacity control		variable	
Sound power level, indoors/outdoors	L _{WA}	40/60	dB(A)
Annual energy consumption	Q _{HE}	4145	kWh
Rated air flow rate, outdoors		3170	m ³ /h

For heat pump combination heater:			
Declared load profile		-	
Daily electricity consumption	Q _{elec}	-	kW/h
Annual electricity consumption	AEC	-	kW/h
Water heating energy efficiency	η_{wh}	-	%

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUZ-WM112VAA(-BS)
	Indoor unit:	EHPX-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	9.2	kW	Seasonal space heating energy efficiency	η_s	122	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	5.8	kW	Tj = - 7 °C	COPd	2.86	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 2 °C	Pdh	5.4	kW	Tj = + 2 °C	COPd	3.58	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 7 °C	Pdh	3.8	kW	Tj = + 7 °C	COPd	4.69	-
Degradation co-efficient (**)	Cdh	0.98	-				
Tj = +12 °C	Pdh	4.6	kW	Tj = +12 °C	COPd	6.67	-
Degradation co-efficient (**)	Cdh	0.97	-				
Tj = bivalent temperature	Pdh	7.5	kW	Tj = bivalent temperature	COPd	1.92	-
Tj = operation limit temperature	Pdh	7.5	kW	Tj = operation limit temperature	COPd	1.52	-
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	8.8	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	2.21	-
Bivalent temperature	Tbiv	-15	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	9.2	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P _{CK}	0.000	kW				

Other items			
Capacity control		variable	
Sound power level, indoors/outdoors	L _{WA}	40/60	dB(A)
Annual energy consumption	Q _{HE}	6990	kWh
Rated air flow rate, outdoors		3170	m ³ /h

For heat pump combination heater:			
Declared load profile		-	
Daily electricity consumption	Q _{elec}	-	kW/h
Annual electricity consumption	AEC	-	kW/h
Water heating energy efficiency	η_{wh}	-	%

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUZ-WM112VAA(-BS)
	Indoor unit:	EHPX-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	9.9	kW	Seasonal space heating energy efficiency	η_s	166	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	6.5	kW	T _j = - 7 °C	COP _d	4.25	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	5.8	kW	T _j = + 2 °C	COP _d	4.73	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = + 7 °C	P _{dh}	4.0	kW	T _j = + 7 °C	COP _d	5.71	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = +12 °C	P _{dh}	4.7	kW	T _j = +12 °C	COP _d	7.46	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = bivalent temperature	P _{dh}	9.4	kW	T _j = bivalent temperature	COP _d	2.52	-
T _j = operation limit temperature	P _{dh}	9.4	kW	T _j = operation limit temperature	COP _d	2.52	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	8.8	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	3.31	-
Bivalent temperature	T _{biv}	-20	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	9.9	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	3170	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	40/60	dB(A)				
Annual energy consumption	Q _{HE}	5528	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	-			η_{wh}	-	%	
Daily electricity consumption	Q _{elec}	-	kW/h				
Annual electricity consumption	AEC	-	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUZ-WM112VAA(-BS)
	Indoor unit:	EHPX-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	10.0	kW	Seasonal space heating energy efficiency	η_s	152	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	-	kW	T _j = - 7 °C	COP _d	-	-
Degradation co-efficient (**)	C _{dh}	-	-				
T _j = + 2 °C	P _{dh}	10.0	kW	T _j = + 2 °C	COP _d	1.81	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	6.4	kW	T _j = + 7 °C	COP _d	3.09	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = +12 °C	P _{dh}	4.4	kW	T _j = +12 °C	COP _d	5.64	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = bivalent temperature	P _{dh}	10.0	kW	T _j = bivalent temperature	COP _d	1.81	-
T _j = operation limit temperature	P _{dh}	8.7	kW	T _j = operation limit temperature	COP _d	1.53	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	2	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	3170	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	40/60	dB(A)				
Annual energy consumption	Q _{HE}	3401	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	-			η_{wh}	-	%	
Daily electricity consumption	Q _{elec}	-	kW/h				
Annual electricity consumption	AEC	-	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUZ-WM112VAA(-BS)
	Indoor unit:	EHPX-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	10.0	kW	Seasonal space heating energy efficiency	η_s	215	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	-	kW	T _j = - 7 °C	COP _d	-	-
Degradation co-efficient (**)	C _{dh}	-	-				
T _j = + 2 °C	P _{dh}	10.0	kW	T _j = + 2 °C	COP _d	3.30	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	6.4	kW	T _j = + 7 °C	COP _d	4.73	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = +12 °C	P _{dh}	4.7	kW	T _j = +12 °C	COP _d	7.12	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = bivalent temperature	P _{dh}	10.0	kW	T _j = bivalent temperature	COP _d	3.30	-
T _j = operation limit temperature	P _{dh}	8.7	kW	T _j = operation limit temperature	COP _d	1.53	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	2	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	3170	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	40/60	dB(A)				
Annual energy consumption	Q _{HE}	2394	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	-			η_{wh}	-	%	
Daily electricity consumption	Q _{elec}	-	kW/h				
Annual electricity consumption	AEC	-	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUZ-WM112VAA(-BS)
	Indoor unit:	ERPX-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	10.0	kW	Seasonal space heating energy efficiency	η_s	136	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	8.8	kW	T _j = - 7 °C	COP _d	2.25	-
Degradation co-efficient (**)	C _{dh}	1.00	-				
T _j = + 2 °C	P _{dh}	5.4	kW	T _j = + 2 °C	COP _d	3.31	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	5.2	kW	T _j = + 7 °C	COP _d	4.61	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = +12 °C	P _{dh}	4.7	kW	T _j = +12 °C	COP _d	6.35	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = bivalent temperature	P _{dh}	8.8	kW	T _j = bivalent temperature	COP _d	2.21	-
T _j = operation limit temperature	P _{dh}	8.7	kW	T _j = operation limit temperature (***)	COP _d	1.61	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-25	°C
Reference design conditions for space heating	T _{designh}	-10	°C	Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	1.2	kW
Thermostat-off mode	P _{TO}	0.015	kW	Type of energy input	Electrical		
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	3170	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	40 / 60	dBA				
Annual energy consumption	Q _{HE}	5905	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	-			η_{wh}	-	%	
Daily electricity consumption	Q _{elec}	-	kWh				
Annual electricity consumption	AEC	-	kWh				

Contact details
MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD. Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

Model(s):	Outdoor unit:	PUZ-WM112VAA(-BS)
	Indoor unit:	ERPX-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for	low-temperature application.	
Parameters for	average climate conditions.	

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	10.0	kW	Seasonal space heating energy efficiency	η_s	195	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	8.8	kW	T _j = - 7 °C	COP _d	3.31	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	5.7	kW	T _j = + 2 °C	COP _d	4.68	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	4.9	kW	T _j = + 7 °C	COP _d	6.68	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = +12 °C	P _{dh}	4.6	kW	T _j = +12 °C	COP _d	9.10	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = bivalent temperature	P _{dh}	8.9	kW	T _j = bivalent temperature	COP _d	3.32	-
T _j = operation limit temperature	P _{dh}	8.7	kW	T _j = operation limit temperature (***)	COP _d	1.61	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-25	°C
Reference design conditions for space heating	T _{designh}	-10	°C	Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	1.1	kW
Thermostat-off mode	P _{TO}	0.015	kW	Type of energy input	Electrical		
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				
Other items							
Capacity control	variable			Rated air flow rate, outdoors	-	3170	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 60	dB(A)				
Annual energy consumption	Q _{HE}	4145	kWh				
For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	-			η_{wh}	-		%
Daily electricity consumption	Q _{elec}	-	kWh				
Annual electricity consumption	AEC	-	kWh				

Other items							
Capacity control	variable			Rated air flow rate, outdoors	-	3170	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 60	dB(A)				
Annual energy consumption	Q _{HE}	4145	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	-			η_{wh}	-		%
Daily electricity consumption	Q _{elec}	-	kWh				
Annual electricity consumption	AEC	-	kWh				

Contact details
MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD. Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

Model(s):	Outdoor unit:	PUZ-WM112VAA(-BS)
	Indoor unit:	ERPX-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	9.2	kW	Seasonal space heating energy efficiency	η_s	124	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	5.8	kW	T _j = - 7 °C	COP _d	2.86	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	5.4	kW	T _j = + 2 °C	COP _d	3.58	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	3.8	kW	T _j = + 7 °C	COP _d	4.69	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = +12 °C	P _{dh}	4.6	kW	T _j = +12 °C	COP _d	6.67	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = bivalent temperature	P _{dh}	7.5	kW	T _j = bivalent temperature	COP _d	1.92	-
T _j = operation limit temperature	P _{dh}	7.5	kW	T _j = operation limit temperature (***)	COP _d	1.53	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-15	°C	Operation limit temperature	TOL	-25	°C
Reference design conditions for space heating	T _{designh}	-22	°C	Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	2.4	kW
Thermostat-off mode	P _{TO}	0.015	kW	Type of energy input	Electrical		
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	3170	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	40 / 60	dBA				
Annual energy consumption	Q _{HE}	6990	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	-			η_{wh}	-	%	
Daily electricity consumption	Q _{elec}	-	kWh				
Annual electricity consumption	AEC	-	kWh				

Contact details
MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD. Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

Model(s):	Outdoor unit:	PUZ-WM112VAA(-BS)
	Indoor unit:	ERPX-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	9.9	kW	Seasonal space heating energy efficiency	η_s	169	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	6.5	kW	T _j = - 7 °C	COP _d	4.25	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	5.8	kW	T _j = + 2 °C	COP _d	4.73	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	4.0	kW	T _j = + 7 °C	COP _d	5.71	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = +12 °C	P _{dh}	4.7	kW	T _j = +12 °C	COP _d	7.46	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = bivalent temperature	P _{dh}	9.4	kW	T _j = bivalent temperature	COP _d	2.52	-
T _j = operation limit temperature	P _{dh}	9.4	kW	T _j = operation limit temperature (***)	COP _d	2.54	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-20	°C	Operation limit temperature	TOL	-25	°C
Reference design conditions for space heating	T _{designh}	-22	°C	Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	1.3	kW
Thermostat-off mode	P _{TO}	0.015	kW	Type of energy input	Electrical		
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	3170	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	40 / 60	dBA				
Annual energy consumption	Q _{HE}	5528	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	-			η_{wh}	-	%	
Daily electricity consumption	Q _{elec}	-	kWh				
Annual electricity consumption	AEC	-	kWh				

Contact details
MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD. Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

Model(s):	Outdoor unit:	PUZ-WM112VAA(-BS)
	Indoor unit:	ERPX-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	10.0	kW	Seasonal space heating energy efficiency	η_s	154	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	-	kW	Tj = - 7 °C	COPd	-	-
Degradation co-efficient (**)	Cdh	-	-				
Tj = + 2 °C	Pdh	10	kW	Tj = + 2 °C	COPd	1.90	-
Degradation co-efficient (**)	Cdh	1.00	-				
Tj = + 7 °C	Pdh	6.4	kW	Tj = + 7 °C	COPd	3.15	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = +12 °C	Pdh	4.4	kW	Tj = +12 °C	COPd	5.66	-
Degradation co-efficient (**)	Cdh	0.98	-				
Tj = bivalent temperature	Pdh	10.0	kW	Tj = bivalent temperature	COPd	1.81	-
Tj = operation limit temperature	Pdh	8.7	kW	Tj = operation limit temperature (***)	COPd	1.55	-
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	-	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	-	-
Bivalent temperature	Tbiv	2	°C	Operation limit temperature	TOL	-25	°C
Reference design conditions for space heating	Tdesignh	2	°C	Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.015	kW	Type of energy input	Electrical		
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				
Other items							
Capacity control	variable			Rated air flow rate, outdoors	-	3170	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 60	dBA				
Annual energy consumption	Q _{HE}	3401	kWh				
For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	-			η_{wh}	-	%	
Daily electricity consumption	Q _{elec}	-	kWh				
Annual electricity consumption	AEC	-	kWh				

Contact details
MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD. Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

Model(s):	Outdoor unit:	PUZ-WM112VAA(-BS)
	Indoor unit:	ERPX-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	10.0	kW	Seasonal space heating energy efficiency	η_s	220	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	-	kW	Tj = - 7 °C	COPd	-	-
Degradation co-efficient (**)	Cdh	-	-				
Tj = + 2 °C	Pdh	10	kW	Tj = + 2 °C	COPd	3.30	-
Degradation co-efficient (**)	Cdh	1.00	-				
Tj = + 7 °C	Pdh	6.4	kW	Tj = + 7 °C	COPd	4.73	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = +12 °C	Pdh	4.7	kW	Tj = +12 °C	COPd	7.12	-
Degradation co-efficient (**)	Cdh	0.98	-				
Tj = bivalent temperature	Pdh	10.0	kW	Tj = bivalent temperature	COPd	3.31	-
Tj = operation limit temperature	Pdh	8.7	kW	Tj = operation limit temperature (***)	COPd	1.55	-
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	-	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	-	-
Bivalent temperature	Tbiv	2	°C	Operation limit temperature	TOL	-25	°C
Reference design conditions for space heating	Tdesignh	2	°C	Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.015	kW	Type of energy input	Electrical		
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				
Other items							
Capacity control	variable			Rated air flow rate, outdoors	-	3170	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 60	dB(A)				
Annual energy consumption	Q _{HE}	3401	kWh				
For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	-			η_{wh}	-	%	
Daily electricity consumption	Q _{elec}	-	kWh				
Annual electricity consumption	AEC	-	kWh				

Contact details
MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD. Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

Model(s):	Outdoor unit:	PUZ-WM112VAA(-BS)
	Indoor unit:	ERPX-MD
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	10.0	kW	Seasonal space heating energy efficiency	η_s	136	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	8.8	kW	T _j = - 7 °C	COP _d	2.25	-
Degradation co-efficient (**)	C _{dh}	1.00	-				
T _j = + 2 °C	P _{dh}	5.4	kW	T _j = + 2 °C	COP _d	3.31	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	5.2	kW	T _j = + 7 °C	COP _d	4.61	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = +12 °C	P _{dh}	4.7	kW	T _j = +12 °C	COP _d	6.35	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = bivalent temperature	P _{dh}	8.8	kW	T _j = bivalent temperature	COP _d	2.21	-
T _j = operation limit temperature	P _{dh}	8.7	kW	T _j = operation limit temperature (***)	COP _d	1.61	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-25	°C
Reference design conditions for space heating	T _{designh}	-10	°C	Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	1.2	kW
Thermostat-off mode	P _{TO}	0.015	kW	Type of energy input	Electrical		
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				
Other items							
Capacity control		variable		Rated air flow rate, outdoors	-	3170	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 60	dBA				
Annual energy consumption	Q _{HE}	5905	kWh				
For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		-		η_{wh}	-		%
Daily electricity consumption	Q _{elec}	-	kWh				
Annual electricity consumption	AEC	-	kWh				

Contact details
MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD. Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

Model(s):	Outdoor unit:	PUZ-WM112VAA(-BS)
	Indoor unit:	ERPX-MD
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	10.0	kW	Seasonal space heating energy efficiency	η_s	195	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	8.8	kW	T _j = - 7 °C	COP _d	3.31	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	5.7	kW	T _j = + 2 °C	COP _d	4.68	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	4.9	kW	T _j = + 7 °C	COP _d	6.68	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = +12 °C	P _{dh}	4.6	kW	T _j = +12 °C	COP _d	9.10	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = bivalent temperature	P _{dh}	8.9	kW	T _j = bivalent temperature	COP _d	3.32	-
T _j = operation limit temperature	P _{dh}	8.7	kW	T _j = operation limit temperature (***)	COP _d	1.61	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-25	°C
Reference design conditions for space heating	T _{designh}	-10	°C	Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	1.1	kW
Thermostat-off mode	P _{TO}	0.015	kW	Type of energy input	Electrical		
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	3170	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	40 / 60	dBA				
Annual energy consumption	Q _{HE}	4145	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	-			η_{wh}	-	%	
Daily electricity consumption	Q _{elec}	-	kWh				
Annual electricity consumption	AEC	-	kWh				

Contact details
MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD. Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

Model(s):	Outdoor unit:	PUZ-WM112VAA(-BS)
	Indoor unit:	ERPX-MD
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	9.2	kW	Seasonal space heating energy efficiency	η_s	124	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	5.8	kW	T _j = - 7 °C	COP _d	2.86	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	5.4	kW	T _j = + 2 °C	COP _d	3.58	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	3.8	kW	T _j = + 7 °C	COP _d	4.69	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = +12 °C	P _{dh}	4.6	kW	T _j = +12 °C	COP _d	6.67	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = bivalent temperature	P _{dh}	7.5	kW	T _j = bivalent temperature	COP _d	1.92	-
T _j = operation limit temperature	P _{dh}	7.5	kW	T _j = operation limit temperature (***)	COP _d	1.53	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-15	°C	Operation limit temperature	TOL	-25	°C
Reference design conditions for space heating	T _{designh}	-22	°C	Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	2.4	kW
Thermostat-off mode	P _{TO}	0.015	kW	Type of energy input	Electrical		
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	3170	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	40 / 60	dBA				
Annual energy consumption	Q _{HE}	6990	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	-			η_{wh}	-	%	
Daily electricity consumption	Q _{elec}	-	kWh				
Annual electricity consumption	AEC	-	kWh				

Contact details
MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD. Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

Model(s):	Outdoor unit:	PUZ-WM112VAA(-BS)
	Indoor unit:	ERPX-MD
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		no
Parameters for	low-temperature application.	
Parameters for	colder climate conditions.	

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	9.9	kW	Seasonal space heating energy efficiency	η_s	169	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	6.5	kW	Tj = - 7 °C	COPd	4.25	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 2 °C	Pdh	5.8	kW	Tj = + 2 °C	COPd	4.73	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 7 °C	Pdh	4.0	kW	Tj = + 7 °C	COPd	5.71	-
Degradation co-efficient (**)	Cdh	0.98	-				
Tj = +12 °C	Pdh	4.7	kW	Tj = +12 °C	COPd	7.46	-
Degradation co-efficient (**)	Cdh	0.98	-				
Tj = bivalent temperature	Pdh	9.4	kW	Tj = bivalent temperature	COPd	2.52	-
Tj = operation limit temperature	Pdh	9.4	kW	Tj = operation limit temperature (***)	COPd	2.54	-
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	-	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	-	-
Bivalent temperature	Tbiv	-20	°C	Operation limit temperature	TOL	-25	°C
Reference design conditions for space heating	Tdesignh	-22	°C	Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	1.3	kW
Thermostat-off mode	P _{TO}	0.015	kW	Type of energy input	Electrical		
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				
Other items							
Capacity control	variable			Rated air flow rate, outdoors	-	3170	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 60	dB(A)				
Annual energy consumption	Q _{HE}	5528	kWh				
For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	-			η_{wh}	-		%
Daily electricity consumption	Q _{elec}	-	kWh				
Annual electricity consumption	AEC	-	kWh				

Capacity control	variable			Rated air flow rate, outdoors	-	3170	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 60	dB(A)				
Annual energy consumption	Q _{HE}	5528	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	-			η_{wh}	-		%
Daily electricity consumption	Q _{elec}	-	kWh				
Annual electricity consumption	AEC	-	kWh				

Contact details
MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD. Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

Model(s):	Outdoor unit:	PUZ-WM112VAA(-BS)
	Indoor unit:	ERPX-MD
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	10.0	kW	Seasonal space heating energy efficiency	η_s	154	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	-	kW	T _j = - 7 °C	COP _d	-	-
Degradation co-efficient (**)	C _{dh}	-	-				
T _j = + 2 °C	P _{dh}	10	kW	T _j = + 2 °C	COP _d	1.90	-
Degradation co-efficient (**)	C _{dh}	1.00	-				
T _j = + 7 °C	P _{dh}	6.4	kW	T _j = + 7 °C	COP _d	3.15	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = +12 °C	P _{dh}	4.4	kW	T _j = +12 °C	COP _d	5.66	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = bivalent temperature	P _{dh}	10.0	kW	T _j = bivalent temperature	COP _d	1.81	-
T _j = operation limit temperature	P _{dh}	8.7	kW	T _j = operation limit temperature (***)	COP _d	1.55	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	2	°C	Operation limit temperature	TOL	-25	°C
Reference design conditions for space heating	T _{designh}	2	°C	Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.015	kW	Type of energy input	Electrical		
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				
Other items							
Capacity control	variable			Rated air flow rate, outdoors	-	3170	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 60	dB(A)				
Annual energy consumption	Q _{HE}	3401	kWh				
For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	-			η_{wh}	-		%
Daily electricity consumption	Q _{elec}	-	kWh				
Annual electricity consumption	AEC	-	kWh				

Contact details
MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD. Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

Model(s):	Outdoor unit:	PUZ-WM112VAA(-BS)
	Indoor unit:	ERPX-MD
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		no
Parameters for	low-temperature application.	
Parameters for	warmer climate conditions.	

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	10.0	kW	Seasonal space heating energy efficiency	η_s	220	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	-	kW	Tj = - 7 °C	COPd	-	-
Degradation co-efficient (**)	Cdh	-	-				
Tj = + 2 °C	Pdh	10	kW	Tj = + 2 °C	COPd	3.30	-
Degradation co-efficient (**)	Cdh	1.00	-				
Tj = + 7 °C	Pdh	6.4	kW	Tj = + 7 °C	COPd	4.73	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = +12 °C	Pdh	4.7	kW	Tj = +12 °C	COPd	7.12	-
Degradation co-efficient (**)	Cdh	0.98	-				
Tj = bivalent temperature	Pdh	10.0	kW	Tj = bivalent temperature	COPd	3.31	-
Tj = operation limit temperature	Pdh	8.7	kW	Tj = operation limit temperature (***)	COPd	1.55	-
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	-	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	-	-
Bivalent temperature	Tbiv	2	°C	Operation limit temperature	TOL	-25	°C
Reference design conditions for space heating	Tdesignh	2	°C	Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.015	kW	Type of energy input	Electrical		
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				
Other items							
Capacity control	variable			Rated air flow rate, outdoors	-	3170	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 60	dBA				
Annual energy consumption	Q _{HE}	3401	kWh				
For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	-			η_{wh}	-	%	
Daily electricity consumption	Q _{elec}	-	kWh				
Annual electricity consumption	AEC	-	kWh				

Contact details
MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD. Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.