





ENERG  
енергия - ενέργεια

Y IJA  
IE IA



Indoor unit EHWT17D-MHEDW

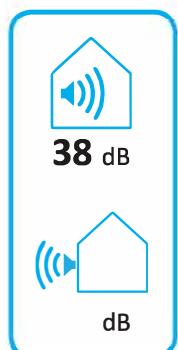

2019

811/2013

BT79L655H02



## PRODUCT FICHE

Mitsubishi Electric ErP Directive Related Product Information: [erp.mitsubishielectric.eu/erp](http://erp.mitsubishielectric.eu/erp)  
Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.  
This information is based on EU regulation No 811/2013 and No 813/2013.

BT79A008H02

	English	Deutsch	Français	Italiano	Español
	Nederlands	Svenska	Dansk	Português	Ελληνικά
	suomi	Cestina	Български	Polski	-
1	Outdoor unit	Außengerät	unité extérieure	unità esterna	unidad exterior
	buitenumit	Utomhusenhet	Udendørs enhed	unidade exterior	Εξωτερική μονάδα
	Ulkojyksikkö	Venkovní jednotka	Външно тяло	jednostka zewnętrzna	-
2	Indoor unit	Innengerät	unité intérieure	unità interna	unidad interior
	binnenunit	Inomhusenhet	Indoors enhed	unidade interior	Εσωτερική μονάδα
	Sisäyskiskö	Vnitřní jednotka	Вътрешно тяло	jednostka wewnętrzna	-
3	Medium-temperature application	Mitteltemperaturanwendung	l'application à moyenne température	le applicazioni a media temperatura	la aplicación de media temperatura
	midtemperatur-toepassing	mediumtemperaturapplikation	midtemperaturanvendelsen	a aplicação a média temperatura	η εφαρμογή σε μέση θερμοκρασία
	keskilämpötilan sovellus	sitednéteplotná aplikácia	среднетемпературного приложения	zastosowania w średnich temperaturach	-
4	Low-temperature application	Niedertemperaturanwendung	l'application à basse température	le applicazioni a bassa temperatura	la aplicación baja temperatura
	lage-temperatur-toepassing	lägtemperaturapplikation	lägvärmesupplägg	a aplicação a baixa temperatura	η εφαρμογή σε χαμηλή θερμοκρασία
	matalanlämpötilän sovellus	nízkoteplovní aplikace	низкотемпературни приложения	zastosowania w niskich temperaturach	-
5	Declared load profile	Angegebenes Lastprofil	Profil de soutrage déclaré	Profil di carico dichiarato	Perfil de carga declarado
	Opggeven capaciteitsprofiel	Deklarerad belastningsprofil	Angivet forbrugsprofil	Perfil de carga declarado	Δηλωμένης προφίλ φορτίου
	Ilmoitettu kuormitusprofil	Deklarovaný záťezový profil	Обявен товаров профил	Deklarowany profil obciążenia	-
6	Seasonal space heating energy efficiency class	die Klasse für die jahreszeitbedingte Raumheizungs-Energieeffizienz	la classe de l'efficacité énergétique saisonnière pour le chauffage des locaux	la classe di efficienza energetica stagionale del riscaldamento d'ambiente	la clase de eficiencia energética estacional de calefacción
	de seizoensgebonden energie-efficiëntieklasse voor ruimteverwarming	säsongssrelaterade energieeffektivitetsklass vid rumsuppvärming	klassen för årsvarningsgrad ved rumopvarming	A classe de eficiência energética do aquecimento ambiente sazonal	η τάξη ενεργειακής απόδοσης της εποχιακής θέρμανσης χώρου
	tilalämmitykseen kausittainen energiatehokkuusluokka	tila lämmityksen kausittainen energiatehokkuusluokka	класът на сезонната отопителна енергийна ефективност	klasa sezonownej efektywnosci energetycznej ogrzewania pomieszczeń	-
7	Water heating energy efficiency class	die Klasse für die Warmwasserbereitungs-Energieeffizienz	la classe d'efficacité énergétique pour le chauffage de l'eau	la classe di efficienza energetica del riscaldamento dell'acqua	la clase de eficiencia energética del caldeo de agua
	de energie-efficiëntieklasse voor waterverwarming	energieeffektivitetsklass vid vattenuppvärming	klassen för årsvarningsgrad ved vandopvarming	A classe de eficiencia energética do aquecimento de água	η τάξη ενεργειακής απόδοσης θέρμανσης νερού
	vedenlämmityksen energiatehokkuusluokka	tila lämmityksen energiatehokkuusluokka	класът на енергийната ефективност при подгряване на вода	klasa efektywnosci energetycznej podgrzewania wody	-
8	Rated heat output under average climate conditions	die Wärmeneleistung bei durchschnittlichen Klimaverhältnissen	la puissance thermique nominale dans les conditions climatiques moyennes	la potenza termica nominale(in condizioni climatiche medie)	la potencia calorifica nominal(en condiciones climáticas medias)
	de nominale warmteafgifte(onder gemiddelde klimaatomstandigheden)	Den nominelle avgivne värmeafgifte(under genomsnittliga klimatförhållanden)	den nominelle nyttoeffekt(under gennemsnittige klimaforhold)	A potência calorífica nominal(em condições climáticas medias)	η ονομαστική θερμική ισχύς(υπό μέσες κλιματικές συνθήκες)
	nimellislämpöteho(keskimäärisissä ilmasto-olo-suhteissa)	jmenvotivý tepelný výkon(z průměrných klimatických podmínek)	номиналната топлинна мощност(при средни климатични условия)	znamionowa moc cieplna(w warunkach klimatu umiarkowanego)	-
9	For space heating, annual energy consumption under average climate conditions	für die Raumheizung, den jährlichen Energieverbrauch bei durchschnittlichen Klimaverhältnissen	pour le chauffage des locaux, la consommation annuelle d'énergie(dans les conditions climatiques moyennes)	per il riscaldamento d'ambiente, il consumo annuo di energia(in condizioni climatiche medie)	para calentar espacios, el consumo anual de energía(en condiciones climáticas medias)
	voor ruimteverwarming, het jaarlijks energieverbruik(onder gemiddelde klimaatomstandigheden)	För rumsuppvärming, årlig energiförbrukning(vid genomsnittliga klimatförhållanden)	for rumopvarming det årlige energiforbrug(under gennemsnittige klimaforhold)	Para o aquecimento ambiente, o consumo anual de energia(em condições climáticas mé dias)	για τη θέρμανση χώρου, η ετήσια κατανάλωση ενέργειας(υπό μέσες κλιματικές συνθήκες)
	tilalämmitykseen vuotuinen energiankulutus(keskimäärisissä ilmasto-olo-suhteissa)	pro vytápění – roční spotřeba energie za průměrných klimatických podmínek	за отопление, годишното потребление на енергия(при средни климатични условия)	w odniesieniu do ogrzewania pomieszczeń, roczne zużycie energii(w warunkach klimatu umiarkowanego)	-
10	For water heating, annual electricity consumption under average climate conditions	für die Warmwasserbereitung, den jährlichen Stromverbrauch bei durchschnittlichen Klimaverhältnissen	pour le chauffage de l'eau, la consommation annuelle d'électricité(dans les conditions climatiques moyennes)	per il riscaldamento dell'acqua, il consumo annuo di energia(in condizioni climatiche medie)	para calentar agua, el consumo anual de electricidad(en condiciones climáticas medias)
	voor waterverwarming, het jaarlijks elektriciteitsverbruik(onder gemiddelde klimaatomstandigheden)	För vattenuppvärming, årlig elförbrukning(vid genomsnittliga klimatförhållanden)	for vandopvarming det årlige elforbrug(under gennemsnittige klimaforhold)	para o aquecimento de água, o consumo anual de electricidade(em condições climáticas mé dias)	για τη θέρμανση νερού, η ετήσια κατανάλωση ηλεκτρικής ενέργειας(υπό μέσες κλιματικές συνθήκες)
	vedenlämmitykseen vuotuinen sähköverbraukkuus(keskimäärisissä ilmasto-olo-suhteissa)	pro ohrev vody – roční spotřeba elektické energie za průměrných klimatických podmínek	за подгряване на вода, годишното потребление(при средни климатични условия)	w odniesieniu do podgrzewania wody, roczne zużycie energii elektrycznej(w warunkach klimatu umiarkowanego)	-
11	Seasonal space heating energy efficiency under average climate conditions	die jahreszeitbedingte Raumheizungs-Energieeffizienz bei durchschnittlichen Klimaverhältnissen	l'efficacité énergétique saisonnière pour le chauffage des locaux(dans les conditions climatiques moyennes)	l'efficienza energetica stagionale di riscaldamento d'ambiente(in condizioni climatiche medie)	la eficiencia energética estacional de calefacción(en condiciones climáticas medias)
	de seizoensgebonden energie-efficiëntie voor ruimteverwarming(onder gemiddelde klimaatomstandigheden)	Säsongssmedelverkningsgrad för rumsuppvärming(vid genomsnittliga klimatförhållanden)	årsvarningsgraden ved rumopvarming(under gennemsnittige klimaforhold)	A eficiência energética do aquecimento ambiente sazonal(em condições climáticas médias)	η ενεργειακή απόδοση της εποχιακής θέρμανσης χώρου(υπό μέσες κλιματικές συνθήκες)
	tilalämmitykseen kausittainen energiatehokkuus(keskimäärisissä ilmasto-olo-suhteissa)	sezonní energetická účinnost vytápění za průměrných klimatických podmínek	сезонната енергийна ефективност при отопление(при средни климатични условия)	sezonowa efektywność energetyczna ogrzewania pomieszczeń(w warunkach klimatu umiarkowanego)	-
12	Water heating energy efficiency under average climate conditions	die Warmwasserbereitungs-Energieeffizienz bei durchschnittlichen Klimaverhältnissen	l'efficacité énergétique pour le chauffage de l'eau(dans les conditions climatiques moyennes)	l'efficienza energetica di riscaldamento dell'acqua(in condizioni climatiche medie)	la eficiencia energética del caldeo de agua(en condiciones climáticas medias)
	de energie-efficiëntie voor waterverwarming(onder gemiddelde klimaatomstandigheden)	Energieeffektivitet vid vattenuppvärming(vid genomsnittliga klimatförhållanden)	energieeffektiviteten ved vandopvarming(under gennemsnittige klimaforhold)	a eficiência energética do aquecimento de água(em condições climáticas médias)	η ενεργειακή απόδοση θέρμανσης νερού(υπό μέσες κλιματικές συνθήκες)
	vedenlämmitykseen energiatehokkuus(keskimäärisissä ilmasto-olo-suhteissa)	energetická účinnost ohrevu vody za průměrných klimatických podmínek	енергийната ефективност при подгряване на вода(при средни климатични условия)	efektywność energetyczna podgrzewania wody(w warunkach klimatu umiarkowanego)	-
13	Sound power level L <sub>WA</sub> indoor	der Schallleistungspegel L <sub>WA</sub> in Gebäuden	le niveau de puissance acoustique L <sub>WA</sub> , à l'intérieur	il livello di potenza sonora L <sub>WA</sub> all'interno	el nivel de potencia acústica L <sub>WA</sub> en interiores
	het geluidsvormogeniveau L <sub>WA</sub> binn	Ljudfektnivå L <sub>WA</sub> i inomhus	lydefektnivået L <sub>WA</sub> i inde	O nível de potência sonora L <sub>WA</sub> no interior	η στάθμη ηχητικής ισχύος L <sub>WA</sub> εσωτερικού χώρου
	äänitehotaso L <sub>WA</sub> sisällä	Hadina akustického výkonu L <sub>WA</sub> ve vnitřním prostoru	ниво на звуковата мощност L <sub>WA</sub> на закрито	poziom mocy akustycznej L <sub>WA</sub> w pomieszczeniu	-
14	Work only during off-peak hours	dass ein ausschließlicher Betrieb des Kombiheizgerätes zu Schwachlastzeiten	fonctionner qu'en heures creuses	funzione soltanto durante las horas de pico	funcionar solamente durante las horas de baja demanda
	werken utslutend in de daluren	drivas uteslutande under perioder med låg belastning	fungere utesl. for spidsbelastningsperioder	de funcionar unicamenta fora das horas de pico	λειτουργεί μόνο εκτός των ωρών αγωγής
	toimimaan ainoastaan külalushuipputen ulkopuolella	pravouz pouze mimo špičku	работать само в часовете извън връхното натоварване	pracować jedynie w godzinach poza szczytowym obciążeniem	-
15	Rated heat output under colder climate conditions	die Wärmeneleistung bei kälteren Klimaverhältnissen	la puissance thermique nominale, dans les conditions climatiques plus froides	la potenza termica nominale, in condizioni climatiche più fredde	la potencia calorifica nominal en condiciones climáticas más frías
	de nominale warmteafgifte, onder koudere klimaatomstandigheden	Nominell avgiven värmeeffekt vid kallare klimatförhållanden	den nominelle nyttoeffekt under koldere klimaforhold	A potência calorífica nominal em condições climáticas mais frias	η ονομαστική θερμική ισχύς υπό ψυχρότερες κλιματικές συνθήκες
	nimellislämpöteho, kylmissä ilmasto-olo-suhteissa	jmenvotivý tepelný výkon za chladnějších klimatických podmínek	номиналната топлинна мощност при по-студени климатични условия	znamionowa moc cieplna(w warunkach klimatu chłodnego)	-
16	Rated heat output under warmer climate conditions	die Wärmeneleistung bei wärmeren Klimaverhältnissen	la puissance thermique nominale, dans les conditions climatiques plus chaudes	la potenza termica nominale, in condizioni climatiche più calde	la potencia calorifica nominal en condiciones climáticas más cálidas
	de nominale warmteafgifte, onder warmer klimaatomstandigheden	Nominell avgiven värmeeffekt vid varmare klimatförhållanden	den nominelle nyttoeffekt under varmere klimaforhold	A potência calorífica nominal em condições climáticas mais quentes	η ονομαστική θερμική ισχύς υπό θερμότερες κλιματικές συνθήκες
	nimellislämpöteho, lämpimissä ilmasto-olo-suhteissa	jmenvotivý tepelný výkon za teplejších klimatických podmínek	номиналната топлинна мощност при по-топли климатични условия	znamionowa moc cieplna(w warunkach klimatu cielego)	-
17	For space heating, annual energy consumption under colder climate conditions	für die Raumheizung, der jährliche Energieverbrauch bei kälteren Klimaverhältnissen	pour le chauffage des locaux, la consommation annuelle d'énergie, dans les conditions climatiques plus froides	per il riscaldamento d'ambiente, il consumo annuo di energia, in condizioni climatiche più fredde	para calentar espacios, el consumo anual de energía en condiciones climáticas más frías
	voor ruimteverwarming, het jaarlijks energieverbruik onder koudere klimaatomstandigheden	För rumsuppvärming, årlig energiförbrukning under kallare klimatförhållanden	for rumopvarming det årlige energiforbrug under koldere klimaforhold	Para o aquecimento ambiente, o consumo anual de energia em condições climáticas mais frias	για τη θέρμανση χώρου, η ετήσια κατανάλωση ενέργειας υπό ψυχρότερες κλιματικές συνθήκες
	tilalämmitykseen vuotuinen energiankulutus kylmissä ilmasto-olo-suhteissa	pro vytápění – roční spotřeba energie za chladnější klimatických podmínek	за отопление, годишното потребление на енергия при по-студени климатични условия	w odniesieniu do ogrzewania pomieszczeń, roczne zużycie energii w warunkach klimatu chłodnego	-
18	For space heating, annual energy consumption under warmer climate conditions	für die Raumheizung, der jährliche Energieverbrauch bei wärmeren Klimaverhältnissen	pour le chauffage des locaux, la consommation annuelle d'énergie, dans les conditions climatiques plus chaudes	per il riscaldamento d'ambiente, il consumo annuo di energia, in condizioni climatiche più calde	para calentar espacios, el consumo anual de energía en condiciones climáticas más cálidas
	voor ruimteverwarming, het jaarlijks energieverbruik onder warmere klimaatomstandigheden	För rumsuppvärming, årlig energiförbrukning under varmare klimatförhållanden	for rumopvarming det årlige energiforbrug under varmere klimaforhold	Para o aquecimento ambiente, o consumo anual de energia em condições climáticas mais quentes	για τη θέρμανση χώρου, η ετήσια κατανάλωση ενέργειας υπό θερμότερες κλιματικές συνθήκες
	tilalämmitykseen vuotuinen energiankulutus lämpimissä ilmasto-olo-suhteissa	pro vytápění – roční spotřeba energie za teplejších klimatických podmínek	за отопление, годишното потребление на енергия при по-топли климатични условия	w odniesieniu do ogrzewania pomieszczeń, roczne zużycie energii w warunkach klimatu cielego	-
19	For water heating, annual energy consumption under colder climate conditions	für die Warmwasserbereitung, der jährliche Stromverbrauch bei kälteren Klimaverhältnissen	pour le chauffage de l'eau, la consommation annuelle d'électricité, dans les conditions climatiques plus froides	per il riscaldamento dell'acqua, il consumo annuo di energia, in condizioni climatiche più fredde	para calentar agua, el consumo anual de electricidad en condiciones climáticas más frías
	voor waterverwarming, het jaarlijks elektriciteitsverbruik onder koudere klimaatomstandigheden	För vattenuppvärming, årlig elförbrukning under kallare klimatförhållanden	for vandopvarming det årlige elforbrug under koldere klimaforhold	para o aquecimento de água, o consumo anual de electricidade em condições climáticas mais frias	για θέρμανση νερού, η ετήσια κατανάλωση ηλεκτρικής ενέργειας υπό ψυχρότερες κλιματικές συνθήκες
	vedenlämmitykseen vuotuinen sähköverbraukkuus kylmissä ilmasto-olo-suhteissa	pro ohrev vody – roční spotřeba elektické energie za chladnějších klimatických podmínek	за подгряване на вода, годишното потребление на електроенергия при по-студени климатични условия	w odniesieniu do podgrzewania wody, roczne zużycie energii elektrycznej w warunkach klimatu chłodnego	-
20	For water heating, annual energy consumption under warmer climate conditions	für die Warmwasserbereitung, der jährliche Stromverbrauch bei wärmeren Klimaverhältnissen	pour le chauffage de l'eau, la consommation annuelle d'électricité		

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	-
	Indoor unit:	EHW17D-MHEDW
Air-to-water heat pump:	no	
Water-to-water heat pump:	yes	
Brine-to-water heat pump:	no	
Low-temperature heat pump:	no	
Equipped with a supplementary heater:	yes	
Heat pump combination heater:	yes	
Parameters for	medium-temperature application.	
Parameters for	average climate conditions.	

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit																																				
Rated heat output (*)	P <sub>Prated</sub>	7.0	kW	Seasonal space heating energy efficiency	η <sub>s</sub>	180	%																																				
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>																																											
T <sub>j</sub> = - 7 °C																																											
Degradation co-efficient (**)	C <sub>d</sub> h	6.2	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	3.75	-																																				
T <sub>j</sub> = + 2 °C	C <sub>d</sub> h	0.99	-	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	4.82	-																																				
Degradation co-efficient (**)	P <sub>d</sub> h	3.8	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	5.48	-																																				
T <sub>j</sub> = + 7 °C	P <sub>d</sub> h	0.98	-	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	5.30	-																																				
Degradation co-efficient (**)	P <sub>d</sub> h	2.4	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	3.75	-																																				
T <sub>j</sub> = +12 °C	P <sub>d</sub> h	0.97	-	T <sub>j</sub> = operation limit temperature (***)	COP <sub>d</sub>	3.43	-																																				
T <sub>j</sub> = bivalent temperature	P <sub>d</sub> h	1.1	kW	Operation limit temperature	T <sub>OL</sub>	-10	°C																																				
T <sub>j</sub> = operation limit temperature (***)	P <sub>d</sub> h	6.2	kW	Heating water operating limit temperature	WT <sub>OL</sub>	60	°C																																				
Bivalent temperature	T <sub>biv</sub>	-7	°C	Supplementary heater																																							
Reference design conditions for space heating	T <sub>designh</sub>	-10	°C	Power consumption in modes other than active mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	0.8	kW	Thermostat-off mode	P <sub>TO</sub>	0.015	kW	Type of energy input	Electrical			Standby mode	P <sub>SB</sub>	0.015	kW									Crankcase heater mode	P <sub>CK</sub>	0.000	kW								
Power consumption in modes other than active mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	0.8	kW																																				
Thermostat-off mode	P <sub>TO</sub>	0.015	kW	Type of energy input	Electrical																																						
Standby mode	P <sub>SB</sub>	0.015	kW																																								
Crankcase heater mode	P <sub>CK</sub>	0.000	kW																																								

**Other items**

Capacity control	variable			Rated brine/water flow rate, outdoor heat exchanger	-	0.83	m <sup>3</sup> /h
Sound power level, indoors/outdoors	L <sub>WA</sub>	38 / -	dBA				
Annual energy consumption	Q <sub>HE</sub>	3082	kWh				

**For heat pump combination heater:**

Declared load profile	L			Water heating energy efficiency	η <sub>wh</sub>	171	%
Daily electricity consumption	Q <sub>elec</sub>	2.860	kWh				
Annual electricity consumption	AEC	630	kWh				

**Contact details**

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEM EUROPE LTD.

Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

The identification and signature of the person empowered to bind the supplier:

Atsushi EDAYOSHI  
 Manager, Quality Assurance Department  
 UNITED KINGDOM

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

· Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

 (\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating P<sub>designh</sub>, and the rated heat output of a supplementary heater P<sub>sup</sub> is equal to the supplementary capacity for heating sup(T<sub>j</sub>).

 (\*\*) If C<sub>d</sub>h is not determined by measurement then the default degradation coefficient is C<sub>d</sub>h = 0.9.

 (\*\*\*) If the declared T<sub>OL</sub> is lower than the T<sub>designh</sub> of the considered climate then the outdoor dry bulb temperature T<sub>j</sub> is equal to T<sub>designh</sub>.

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	-
	Indoor unit:	EHWT17D-MHEDW
Air-to-water heat pump:	no	
Water-to-water heat pump:	yes	
Brine-to-water heat pump:	no	
Low-temperature heat pump:	no	
Equipped with a supplementary heater:	yes	
Heat pump combination heater:	yes	
Parameters for	low-temperature application.	
Parameters for	average climate conditions.	

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	P <sub>Prated</sub>	7.0	kW	Seasonal space heating energy efficiency	η <sub>s</sub>	267	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>							
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	6.2	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	6.15	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	7.15	-
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	3.8	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	7.73	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	7.37	-
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	2.4	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	6.15	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.95	-	T <sub>j</sub> = operation limit temperature (***)	COP <sub>d</sub>	5.94	-
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	1.2	kW	Operation limit temperature	T <sub>OL</sub>	-10	°C
Degradation co-efficient (**)	C <sub>dh</sub>	0.91	-	Heating water operating limit temperature	WT <sub>OL</sub>	60	°C
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	6.2	kW	Supplementary heater			
T <sub>j</sub> = operation limit temperature (***)	P <sub>dh</sub>	6.3	kW	Rated heat output (*)	P <sub>sup</sub>	0.7	kW
Bivalent temperature	T <sub>biv</sub>	-7	°C	Type of energy input	Electrical		
Reference design conditions for space heating	T <sub>designh</sub>	-10	°C				

**Power consumption in modes other than active mode**

Off mode	P <sub>OFF</sub>	0.015	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW
Standby mode	P <sub>SB</sub>	0.015	kW
Crankcase heater mode	P <sub>CK</sub>	0.000	kW

**Other items**

Capacity control	variable			Rated brine/water flow rate, outdoor heat exchanger	-	0.97	m <sup>3</sup> /h
Sound power level, indoors/outdoors	L <sub>WA</sub>	38 / -	dBA				
Annual energy consumption	Q <sub>HE</sub>	2104	kWh				

**For heat pump combination heater:**

Declared load profile	L			Water heating energy efficiency	η <sub>wh</sub>	171	%
Daily electricity consumption	Q <sub>elec</sub>	2.860	kWh				
Annual electricity consumption	AEC	630	kWh				

**Contact details**

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEM EUROPE LTD.	Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.
---	--

The identification and signature of the person empowered to bind the supplier;

Atsushi EDAYOSHI

The signature is signed in the average climate / medium-temperature section.

Manager, Quality Assurance Department

UNITED KINGDOM

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

· Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating P<sub>designh</sub>, and the rated heat output of a supplementary heater P<sub>sup</sub> is equal to the supplementary capacity for heating sup(T<sub>j</sub>).

(\*\*) If C<sub>dh</sub> is not determined by measurement then the default degradation coefficient is C<sub>dh</sub> = 0.9.

(\*\*\*) If the declared T<sub>OL</sub> is lower than the T<sub>designh</sub> of the considered climate then the outdoor dry bulb temperature T<sub>j</sub> is equal to T<sub>designh</sub>.

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	-
	Indoor unit:	EHWT17D-MHEDW
Air-to-water heat pump:	no	
Water-to-water heat pump:	yes	
Brine-to-water heat pump:	no	
Low-temperature heat pump:	no	
Equipped with a supplementary heater:	yes	
Heat pump combination heater:	yes	
Parameters for	medium-temperature application.	
Parameters for	colder climate conditions.	

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	P <sub>Prated</sub>	7.0	kW	Seasonal space heating energy efficiency	η <sub>s</sub>	182	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>							
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	4.2	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	4.53	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	5.22	-
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	2.6	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	5.35	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	5.29	-
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	1.7	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	3.47	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.95	-	T <sub>j</sub> = operation limit temperature (***)	COP <sub>d</sub>	3.43	-
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	1.1	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	3.81	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.93	-	Operation limit temperature	T <sub>OL</sub>	-22	°C
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	6.3	kW	Heating water operating limit temperature	WT <sub>OL</sub>	60	°C
T <sub>j</sub> = operation limit temperature (***)	P <sub>dh</sub>	6.2	kW				
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	5.7	kW				
Bivalent temperature	T <sub>biv</sub>	-18	°C				
Reference design conditions for space heating	T <sub>designh</sub>	-22	°C				
Power consumption in modes other than active mode							
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	0.8	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW	Type of energy input			Electrical
Standby mode	P <sub>SB</sub>	0.015	kW				
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

**Other items**

Capacity control	variable			Rated brine/water flow rate, outdoor heat exchanger	-	0.83	m <sup>3</sup> /h
Sound power level, indoors/outdoors	L <sub>WA</sub>	38 / -	dBA				
Annual energy consumption	Q <sub>HE</sub>	3634	kWh				

**For heat pump combination heater:**

Declared load profile	L			Water heating energy efficiency	η <sub>wh</sub>	171	%
Daily electricity consumption	Q <sub>elec</sub>	2.860	kWh				
Annual electricity consumption	AEC	630	kWh				

**Contact details**

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEM EUROPE LTD.	Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.
The identification and signature of the person empowered to bind the supplier;	

The signature is signed in the average climate / medium-temperature section.

Atsushi EDAYOSHI

Manager, Quality Assurance Department

UNITED KINGDOM

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating P<sub>designh</sub>, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(T<sub>j</sub>).

(\*\*) If C<sub>dh</sub> is not determined by measurement then the default degradation coefficient is C<sub>dh</sub> = 0.9.

(\*\*\*) If the declared TOL is lower than the T<sub>designh</sub> of the considered climate then the outdoor dry bulb temperature T<sub>j</sub> is equal to T<sub>designh</sub>.

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	-
	Indoor unit:	EHWT17D-MHEDW
Air-to-water heat pump:	no	
Water-to-water heat pump:	yes	
Brine-to-water heat pump:	no	
Low-temperature heat pump:	no	
Equipped with a supplementary heater:	yes	
Heat pump combination heater:	yes	
Parameters for	low-temperature application.	
Parameters for	colder climate conditions.	

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	P <sub>Prated</sub>	7.0	kW	Seasonal space heating energy efficiency	η <sub>s</sub>	272	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>							
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	4.2	kW	Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>	COP <sub>d</sub>	6.96	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	7.49	-
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	2.6	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	7.50	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.96	-	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	7.37	-
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	1.7	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	5.79	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.93	-	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	5.53	-
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	1.2	kW	T <sub>j</sub> = operation limit temperature (***)	COP <sub>d</sub>	6.18	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.91	-	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-22	°C
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	6.3	kW	Operation limit temperature	T <sub>OL</sub>	60	°C
T <sub>j</sub> = operation limit temperature (***)	P <sub>dh</sub>	6.5	kW	Heating water operating limit temperature	WT <sub>OL</sub>	0.5	kW
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	5.7	kW				
Bivalent temperature	T <sub>biv</sub>	-18	°C				
Reference design conditions for space heating	T <sub>designh</sub>	-22	°C				
Power consumption in modes other than active mode							
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	0.5	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW	Type of energy input		Electrical	
Standby mode	P <sub>SB</sub>	0.015	kW				
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

**Other items**

Capacity control	variable			Rated brine/water flow rate, outdoor heat exchanger	-	0.97	m <sup>3</sup> /h
Sound power level, indoors/outdoors	L <sub>WA</sub>	38 / -	dBA				
Annual energy consumption	Q <sub>HE</sub>	2463	kWh				

**For heat pump combination heater:**

Declared load profile	L			Water heating energy efficiency	η <sub>wh</sub>	171	%
Daily electricity consumption	Q <sub>elec</sub>	2.860	kWh				
Annual electricity consumption	AEC	630	kWh				

**Contact details**

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEM EUROPE LTD.	Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.
The identification and signature of the person empowered to bind the supplier;	

The signature is signed in the average climate / medium-temperature section.

Atsushi EDAYOSHI

Manager, Quality Assurance Department

UNITED KINGDOM

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating P<sub>designh</sub>, and the rated heat output of a supplementary heater P<sub>sup</sub> is equal to the supplementary capacity for heating sup(T<sub>j</sub>).

(\*\*) If C<sub>dh</sub> is not determined by measurement then the default degradation coefficient is C<sub>dh</sub> = 0.9.

(\*\*\*) If the declared TOL is lower than the T<sub>designh</sub> of the considered climate then the outdoor dry bulb temperature T<sub>j</sub> is equal to T<sub>designh</sub>.

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	-
	Indoor unit:	EHWT17D-MHEDW
Air-to-water heat pump:	no	
Water-to-water heat pump:	yes	
Brine-to-water heat pump:	no	
Low-temperature heat pump:	no	
Equipped with a supplementary heater:	yes	
Heat pump combination heater:	yes	
Parameters for	medium-temperature application.	
Parameters for	warmer climate conditions.	

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit			
Rated heat output (*)	P <sub>Prated</sub>	7.0	kW	Seasonal space heating energy efficiency	η <sub>s</sub>	173	%			
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>										
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	-	-			
Degradation co-efficient (**)	C <sub>dh</sub>	-		T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	2.90	-			
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	7.0	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	4.46	-			
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	5.30	-			
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	4.5	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	2.90	-			
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-	T <sub>j</sub> = operation limit temperature (***)	COP <sub>d</sub>	2.90	-			
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	2.0	kW	Operation limit temperature	T <sub>OL</sub>	2	°C			
Degradation co-efficient (**)	C <sub>dh</sub>	0.96	-	Heating water operating limit temperature	WT <sub>OL</sub>	60	°C			
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	7.0	kW	Supplementary heater						
T <sub>j</sub> = operation limit temperature (***)	P <sub>dh</sub>	7.0	kW	Rated heat output (*)	P <sub>sup</sub>	0.0	kW			
Bivalent temperature	T <sub>biv</sub>	2	°C	Type of energy input	Electrical					
Reference design conditions for space heating	T <sub>designh</sub>	2	°C							
Power consumption in modes other than active mode										
Off mode	P <sub>OFF</sub>	0.015	kW							
Thermostat-off mode	P <sub>TO</sub>	0.015	kW							
Standby mode	P <sub>SB</sub>	0.015	kW							
Crankcase heater mode	P <sub>CK</sub>	0.000	kW							

**Other items**

Capacity control	variable			Rated brine/water flow rate, outdoor heat exchanger	-	0.83	m <sup>3</sup> /h
Sound power level, indoors/outdoors	L <sub>WA</sub>	38 / -	dBA				
Annual energy consumption	Q <sub>HE</sub>	2061	kWh				

**For heat pump combination heater:**

Declared load profile	L			Water heating energy efficiency	η <sub>wh</sub>	171	%
Daily electricity consumption	Q <sub>elec</sub>	2.860	kWh				
Annual electricity consumption	AEC	630	kWh				

**Contact details**

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEM EUROPE LTD.	Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.
The identification and signature of the person empowered to bind the supplier;	

The signature is signed in the average climate / medium-temperature section.

Atsushi EDAYOSHI

Manager, Quality Assurance Department

UNITED KINGDOM

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating P<sub>designh</sub>, and the rated heat output of a supplementary heater P<sub>sup</sub> is equal to the supplementary capacity for heating sup(T<sub>j</sub>).

(\*\*) If C<sub>dh</sub> is not determined by measurement then the default degradation coefficient is C<sub>dh</sub> = 0.9.

(\*\*\*) If the declared T<sub>OL</sub> is lower than the T<sub>designh</sub> of the considered climate then the outdoor dry bulb temperature T<sub>j</sub> is equal to T<sub>designh</sub>.

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	-
	Indoor unit:	EHW17D-MHEDW
Air-to-water heat pump:	no	
Water-to-water heat pump:	yes	
Brine-to-water heat pump:	no	
Low-temperature heat pump:	no	
Equipped with a supplementary heater:	yes	
Heat pump combination heater:	yes	
Parameters for	low-temperature application.	
Parameters for	warmer climate conditions.	

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	P <sub>Prated</sub>	7.0	kW	Seasonal space heating energy efficiency	η <sub>s</sub>	257	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>							
T <sub>j</sub> = - 7 °C	P <sub>djh</sub>	-	kW	Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>	COP <sub>d</sub>	-	-
Degradation co-efficient (**)	C <sub>djh</sub>	-		T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	5.10	-
T <sub>j</sub> = + 2 °C	P <sub>djh</sub>	7.0	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	6.83	-
Degradation co-efficient (**)	C <sub>djh</sub>	0.99	-	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	7.51	-
T <sub>j</sub> = + 7 °C	P <sub>djh</sub>	4.5	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	5.10	-
Degradation co-efficient (**)	C <sub>djh</sub>	0.98	-	T <sub>j</sub> = operation limit temperature (***)	COP <sub>d</sub>	5.10	-
T <sub>j</sub> = +12 °C	P <sub>djh</sub>	2.0	kW	Operation limit temperature	T <sub>OL</sub>	2	°C
Degradation co-efficient (**)	C <sub>djh</sub>	0.94	-	Heating water operating limit temperature	WT <sub>OL</sub>	60	°C
T <sub>j</sub> = bivalent temperature	P <sub>djh</sub>	7.0	kW	Supplementary heater			
T <sub>j</sub> = operation limit temperature (***)	P <sub>djh</sub>	7.0	kW	Rated heat output (*)	P <sub>sup</sub>	0.0	kW
Bivalent temperature	T <sub>biv</sub>	2	°C	Type of energy input		Electrical	
Reference design conditions for space heating	T <sub>designh</sub>	2	°C				
Power consumption in modes other than active mode							
Off mode	P <sub>OFF</sub>	0.015	kW				
Thermostat-off mode	P <sub>TO</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW				
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items

Capacity control	variable			Rated brine/water flow rate, outdoor heat exchanger	-	0.97	m <sup>3</sup> /h
Sound power level, indoors/outdoors	L <sub>WA</sub>	38 / -	dBA				
Annual energy consumption	Q <sub>HE</sub>	1410	kWh				

For heat pump combination heater:

Declared load profile	L			Water heating energy efficiency	η <sub>wh</sub>	171	%
Daily electricity consumption	Q <sub>elec</sub>	2.860	kWh				
Annual electricity consumption	AEC	630	kWh				

Contact details

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEM EUROPE LTD.	Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.
The identification and signature of the person empowered to bind the supplier;	

The signature is signed in the average climate / medium-temperature section.

Atsushi EDAYOSHI

Manager, Quality Assurance Department

UNITED KINGDOM

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating P<sub>designh</sub>, and the rated heat output of a supplementary heater P<sub>sup</sub> is equal to the supplementary capacity for heating sup(T<sub>j</sub>).

(\*\*) If C<sub>djh</sub> is not determined by measurement then the default degradation coefficient is C<sub>djh</sub> = 0.9.

(\*\*\*) If the declared T<sub>OL</sub> is lower than the T<sub>designh</sub> of the considered climate then the outdoor dry bulb temperature T<sub>j</sub> is equal to T<sub>designh</sub>.