




ENERG  
енергия · ενεργεια



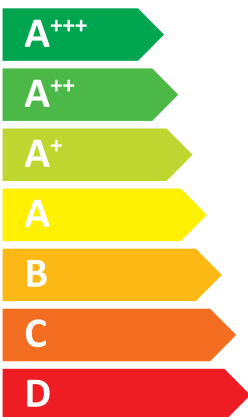
Indoor unit  
Outdoor unit

E\*SD-\*\*\*\*D  
PUZ-SHWM60VAA



55 °C

35 °C



A<sup>++</sup>

A<sup>+++</sup>



41 dB



54 dB

06  
06  
06  
kW

06  
06  
06  
kW



2019

811/2013

DG79V342H10

		1		2		3		6		8		11		9		13		15		16		21		22		17		18		25						
Outdoor unit		Indoor unit		Medium temperature application	Seasonal space heating energy efficiency class				Seasonal space heating energy efficiency class				For space heating, annual energy consumption under average climate conditions				Sound power level L <sub>WA</sub> , indoor				Rated heat output under colder climate conditions				Rated heat output under warmer climate conditions				Seasonal space heating energy efficiency under warmer climate conditions				Sound power level L <sub>WA</sub> , outdoor			
					kW		%		kW		%		kW		%		kW		%		kW		%		kW		%		kW		%		kW		%	
					kW	%	kW	%	kW	%	kW	%	kW	%	kW	%	kW	%	kW	%	kW	%	kW	%	kW	%	kW	%	kW	%	kW	%	kW	%		
PUZ-SWM60VAA	EHS0-*****	✓	✓	✓	A++	6	126	3834	41	6	126	3834	41	6	111	150	5181	2093	54	✓	A+++	6	181	2701	41	6	6	135	208	4284	1519	54				
	ERS0-*****	✓	✓	✓	A++	6	128	3779	41	6	6	128	3779	41	6	112	155	5147	2027	54	✓	A+++	6	184	2646	41	6	6	136	218	4251	1453	54			
PUZ-SWM80VAA	EHS0-*****	✓	✓	✓	A++	8	129	5016	41	8	8	129	5016	41	8	111	162	6890	2584	54	✓	A+++	8	181	3599	41	8	8	141	219	5460	1928	54			
	ERS0-*****	✓	✓	✓	A++	8	130	4961	41	8	8	122	167	6857	2517	54	✓	A+++	8	184	3543	41	8	8	142	227	5427	1862	54							
PUZ-SWM80YAA	EHS0-*****	✓	✓	✓	A++	8	128	5053	41	8	8	111	160	6923	2629	54	✓	A+++	8	179	3636	41	8	8	141	214	5493	1973	54							
	ERS0-*****	✓	✓	✓	A++	8	130	4972	41	8	8	112	166	6875	2532	54	✓	A+++	8	183	3555	41	8	8	142	225	5444	1876	54							
PUZ-SWM100VAA	EHS0-*****	✓	✓	✓	A++	10	132	6106	41	10	10	109	156	8813	3362	58	✓	A+++	10	178	4564	41	10	10	147	223	6575	2369	58							
	ERS0-*****	✓	✓	✓	A++	10	134	6051	41	10	10	109	159	8780	3295	58	✓	A+++	10	180	4509	41	10	10	147	229	6555	2302	58							
PUZ-SWM100YAA	EHS0-*****	✓	✓	✓	A++	10	132	6141	41	10	10	109	154	8840	3406	58	✓	A+++	10	177	4600	41	10	10	146	219	6601	2411	58							
	ERS0-*****	✓	✓	✓	A++	10	133	6061	41	10	10	109	159	8791	3308	58	✓	A+++	10	180	4519	41	10	10	147	228	6565	2314	58							
PUZ-SWM120VAA	EHS0-*****	✓	✓	✓	A++	12	131	7450	41	12	12	109	154	10673	4115	58	✓	A+++	12	177	5566	41	12	12	141	221	8290	2882	58							
	ERS0-*****	✓	✓	✓	A++	12	132	7395	41	12	12	109	157	10640	4049	58	✓	A+++	12	178	5511	41	12	12	141	227	8257	2816	58							
PUZ-SWM120YAA	EHS0-*****	✓	✓	✓	A++	12	131	7485	41	12	12	109	153	10698	4157	58	✓	A+++	12	176	5600	41	12	12	140	218	8316	2922	58							
	ERS0-*****	✓	✓	✓	A++	12	132	7404	41	12	12	109	156	10649	4060	58	✓	A+++	12	178	5520	41	12	12	141	226	8267	2825	58							
PUZ-SWM140VAA	EHS0-*****	✓	✓	✓	A++	14	134	8438	41	14	14	104	150	12843	4893	58	✓	A+++	14	175	6483	41	1													

1	2	3	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25																						
Outdoor unit	Indoor unit	Medium temperature application	Dedicated load profile	Seasonal space heating energy efficiency class	Water heating energy efficiency class	Rated heat output under average climate conditions					For space heating, annual energy consumption under average climate conditions					For water heating, annual energy consumption under average climate conditions					Seasonal space heating energy efficiency under average climate conditions					Water heating energy efficiency under average climate conditions																			
						kW		kWh		kWh		%		kW		kWh		kWh		%		kW		kWh		kWh		%		kW		kWh		kWh		%									
						kW	kWh	kWh	%	kWh	%	kWh	%	kWh	%	kWh	%	kWh	%	kWh	%	kWh	%	kWh	%	kWh	%	kWh	%	kWh	%	kWh	%	kWh	%										
PUZ-SWM60VAA	EHST17D-****	✓	L	A++	A+	6	3834	880	126	134	41	-	6	6	5181	2093	1060	846	111	150	105	135	54	✓	L	A+++	A+	6	2701	880	181	134	41	-	6	6	4284	1519	1060	846	135	208	105	135	54
	ERST17D-****	✓	L	A++	A+	6	3779	880	128	134	41	-	6	6	5147	2027	1060	846	112	155	105	135	54	✓	L	A+++	A+	6	2646	880	184	134	41	-	6	6	4251	1453	1060	846	136	218	105	135	54
	ERST17D-****BD	✓	L	A++	A+	6	3779	880	128	134	41	-	6	6	5147	2027	1060	846	112	155	105	135	54	✓	L	A+++	A+	6	2646	880	184	134	41	-	6	6	4251	1453	1060	846	136	218	105	135	54
	EHST20D-****	✓	L	A++	A+	6	3834	898	126	134	41	-	6	6	5181	2093	1044	841	111	150	109	139	54	✓	L	A+++	A+	6	2701	898	181	134	41	-	6	6	4284	1519	1044	841	135	208	109	139	54
	ERST20D-****	✓	L	A++	A+	6	3779	898	128	134	41	-	6	6	5147	2027	1044	841	112	155	109	139	54	✓	L	A+++	A+	6	2646	898	184	134	41	-	6	6	4251	1453	1044	841	136	218	109	139	54
PUZ-SWM80VAA	EHST30D-****	✓	XL	A++	A+	6	3834	1417	126	123	41	-	6	6	5181	2093	1759	1176	111	150	98	149	54	✓	XL	A+++	A+	6	2701	1417	181	123	41	-	6	6	4284	1519	1759	1176	135	208	98	149	54
	ERST30D-****	✓	XL	A++	A+	6	3779	1417	128	123	41	-	6	6	5147	2027	1759	1176	112	155	98	149	54	✓	XL	A+++	A+	6	2646	1417	184	123	41	-	6	6	4251	1453	1759	1176	136	218	98	149	54
	EHST17D-****	✓	L	A++	A+	8	5016	880	129	134	41	-	8	8	6890	2584	1060	846	111	162	105	135	54	✓	L	A+++	A+	8	3599	880	181	134	41	-	8	8	5460	1928	1060	846	141	219	105	135	54
	ERST17D-****	✓	L	A++	A+	8	4961	880	130	134	41	-	8	8	6857	2517	1060	846	112	167	105	135	54	✓	L	A+++	A+	8	3543	880	184	134	41	-	8	8	5427	1862	1060	846	142	227	105	135	54
	ERST17D-****BD	✓	L	A++	A+	8	4961	880	130	134	41	-	8	8	6857	2517	1060	846	112	167	105	135	54	✓	L	A+++	A+	8	3543	880	184	134	41	-	8	8	5427	1862	1060	846	142	227	105	135	54
PUZ-SWM80YAA	EHST20D-****	✓	L	A++	A+	8	50																																						



	English	Deutsch	Français	Italiano	Espanol
	Nederlands	Svenska	Dansk	Português	Ελληνικά
	suomi	Čeština	Български	Polski	Ελληνικά
	Outdoor unit	Außengerät	unité extérieure	unità esterna	unidad exterior
1	Building	Umlüftung	Unitérs enlief	unidad exterior	Εξωτερική μονάδα
	Ulkoyksikkö	Ventiloini jeditoka	Външно тѣло	jeditoka zewmierzita	-
2	Indoor unit	Innengerät	unité intérieure	unità interna	unidad interior
	sisäyksikkö	Innenheißerät	Intérieurrs enlief	unidad interior	Εσωτερική μονάδα
	Seasonal	Stsajunski	Всѣтсѣно тѣло	jeditoka zewmierzita	-
	Medium-temperature application	Mitteltemperaturanwendung	l'application à moyenne température	l'application a media temperatura	la aplicación de media temperatura
3	medium-temperature-boasting	medium-temperaturapplikation	middletemperaturalvenelien	a aplicacão a media temperatura	η εφαρμογή σε μέση θερμοκρασία
	keshilampilain sovellys	středněteplotní aplikace	среднотемпературного приложени	zastosowania w średnich temperaturach	η εφαρμογή σε χαμηλή θερμοκρασία
4	Low-temperature application	Niedertemperaturanwendung	l'application à basse température	la aplicación a bassa temperatura	la aplicación de baja temperatura
	lagedämpimyssovellus	Niedertemperaturapplikation	l'application à basse température	a aplicacão a baixa temperatura	η εφαρμογή σε υψηλή θερμοκρασία
5	Decided load profile	Angegebener Lastprofil	Profil de soudeage décidé	Profilo di carico dicitato	Perfil de carga decidido
	Spregeven capaciteitsprofiel	Deklarerat belastingsprofil	Arduet profil d'arage	Perfil de carga decidido	Δηλωτικό προφίλ φορτίου
	limoietu kuormitusprofiili	Deklarovaný zatěžový profil	Обиен товарноу профил	Declaração perfil de carga	-
	Seasonal space heating energy efficiency class	la classe für die jahreszeitbedingte Raumheizungs-Energieeffizienz	la classe d'efficacité énergétique saisonnière, pour le chauffage des locaux	la classe de eficiência energética sazonal	la classe de eficiência energética sazonal
6	de seizoengebonden energie-efficiëntieklasse voor ruimteverwarming	saisonsgestartede energieefficiëntieklasse voor ruimteverwarming	la classe d'efficacité énergétique pour le chauffage des locaux	la classe de eficiência energética sazonal	la classe de eficiência energética sazonal
	Iltaimittimykseen kausittainen energiatuokitusluokitus	Iltaimittimykseen kausittainen energiatuokitusluokitus	la classe d'efficacité énergétique, pour le chauffage de l'eau	la classe de eficiência energética del riscaldamento dell'acqua	la classe de eficiência energética del riscaldamento dell'acqua
	Water heating energy efficiency class	Water heating energy efficiency class	la classe d'efficacité énergétique, pour le chauffage de l'eau	la classe de eficiência energética del riscaldamento dell'acqua	la classe de eficiência energética del riscaldamento dell'acqua
7	de energie-efficiëntieklasse voor waterverwarming	Water heating energy efficiency class	la classe d'efficacité énergétique, pour le chauffage de l'eau	la classe de eficiência energética del riscaldamento dell'acqua	la classe de eficiência energética del riscaldamento dell'acqua
	vedenlämmitykseen energiatuokitusluokka	Water heating energy efficiency class	la classe d'efficacité énergétique, pour le chauffage de l'eau	la classe de eficiência energética del riscaldamento dell'acqua	la classe de eficiência energética del riscaldamento dell'acqua
8	Rated heat output under average climate conditions	Rated heat output under average climate conditions	la puissance thermique nominale dans les conditions climatiques moyennes	la potenza termica nominale (in condizioni climatiche medie)	la potenza calorifica nominale (in condizioni climatiche medie)
	de nominale warmteafgifte (onder gemiddelde klimaatomstandigheden)	de nominale warmteafgifte (onder gemiddelde klimaatomstandigheden)	la puissance thermique nominale dans les conditions climatiques moyennes	la potenza termica nominale (in condizioni climatiche medie)	la potenza calorifica nominale (in condizioni climatiche medie)
	Iltaimittimykseen keskimääräisessä ilmastoloosuhteissa	Iltaimittimykseen keskimääräisessä ilmastoloosuhteissa	la puissance thermique nominale dans les conditions climatiques moyennes	la potenza termica nominale (in condizioni climatiche medie)	la potenza calorifica nominale (in condizioni climatiche medie)
	For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	la puissance thermique nominale dans les conditions climatiques moyennes	la potenza termica nominale (in condizioni climatiche medie)	la potenza calorifica nominale (in condizioni climatiche medie)
9	voor ruimteverwarming, het jaarlijkse energieverbruik (onder gemiddelde klimaatomstandigheden)	voor ruimteverwarming, het jaarlijkse energieverbruik (onder gemiddelde klimaatomstandigheden)	la puissance thermique nominale dans les conditions climatiques moyennes	la potenza termica nominale (in condizioni climatiche medie)	la potenza calorifica nominale (in condizioni climatiche medie)
	Iltaimittimykseen vuotuinen energiantuokitus (keskimääräisessä ilmastoloosuhteissa)	Iltaimittimykseen vuotuinen energiantuokitus (keskimääräisessä ilmastoloosuhteissa)	la puissance thermique nominale dans les conditions climatiques moyennes	la potenza termica nominale (in condizioni climatiche medie)	la potenza calorifica nominale (in condizioni climatiche medie)
	For water heating, annual electricity consumption under average climate conditions	For water heating, annual electricity consumption under average climate conditions	la puissance thermique nominale dans les conditions climatiques moyennes	la potenza termica nominale (in condizioni climatiche medie)	la potenza calorifica nominale (in condizioni climatiche medie)
10	voor waterverwarming, het jaarlijkse elektriciteitsverbruik (onder gemiddelde klimaatomstandigheden)	voor waterverwarming, het jaarlijkse elektriciteitsverbruik (onder gemiddelde klimaatomstandigheden)	la puissance thermique nominale dans les conditions climatiques moyennes	la potenza termica nominale (in condizioni climatiche medie)	la potenza calorifica nominale (in condizioni climatiche medie)
	vedenlämmitykseen vuotuinen sähkökuutus (keskimääräisessä ilmastoloosuhteissa)	vedenlämmitykseen vuotuinen sähkökuutus (keskimääräisessä ilmastoloosuhteissa)	la puissance thermique nominale dans les conditions climatiques moyennes	la potenza termica nominale (in condizioni climatiche medie)	la potenza calorifica nominale (in condizioni climatiche medie)
11	Seasonal space heating energy efficiency under average climate conditions	Seasonal space heating energy efficiency under average climate conditions	la puissance thermique nominale dans les conditions climatiques moyennes	la potenza termica nominale (in condizioni climatiche medie)	la potenza calorifica nominale (in condizioni climatiche medie)
	de seizoengebonden energie-efficiëntie voor ruimteverwarming (onder gemiddelde klimaatomstandigheden)	de seizoengebonden energie-efficiëntie voor ruimteverwarming (onder gemiddelde klimaatomstandigheden)	la puissance thermique nominale dans les conditions climatiques moyennes	la potenza termica nominale (in condizioni climatiche medie)	la potenza calorifica nominale (in condizioni climatiche medie)
	Iltaimittimykseen kausittainen energiatuokitus (keskimääräisessä ilmastoloosuhteissa)	Iltaimittimykseen kausittainen energiatuokitus (keskimääräisessä ilmastoloosuhteissa)	la puissance thermique nominale dans les conditions climatiques moyennes	la potenza termica nominale (in condizioni climatiche medie)	la potenza calorifica nominale (in condizioni climatiche medie)
	Water heating energy efficiency under average climate conditions	Water heating energy efficiency under average climate conditions	la puissance thermique nominale dans les conditions climatiques moyennes	la potenza termica nominale (in condizioni climatiche medie)	la potenza calorifica nominale (in condizioni climatiche medie)
12	de energie-efficiëntie voor waterverwarming (onder gemiddelde klimaatomstandigheden)	de energie-efficiëntie voor waterverwarming (onder gemiddelde klimaatomstandigheden)	la puissance thermique nominale dans les conditions climatiques moyennes	la potenza termica nominale (in condizioni climatiche medie)	la potenza calorifica nominale (in condizioni climatiche medie)
	vedenlämmitykseen energiatuokitus (keskimääräisessä ilmastoloosuhteissa)	vedenlämmitykseen energiatuokitus (keskimääräisessä ilmastoloosuhteissa)	la puissance thermique nominale dans les conditions climatiques moyennes	la potenza termica nominale (in condizioni climatiche medie)	la potenza calorifica nominale (in condizioni climatiche medie)
13	Sound power level L <sub>WA</sub> indoor	Sound power level L <sub>WA</sub> indoor	le niveau de puissance acoustique L <sub>WA</sub> à l'intérieur	il livello di potenza sonora L <sub>WA</sub> all'interno	el nivel de potencia acústica L <sub>WA</sub> en interiores
	Ääniteho L <sub>WA</sub> sisällä	Ääniteho L <sub>WA</sub> sisällä	le niveau de puissance acoustique L <sub>WA</sub> à l'intérieur	il livello di potenza sonora L <sub>WA</sub> all'interno	el nivel de potencia acústica L <sub>WA</sub> en interiores
	het geluidswaarniveau L <sub>WA</sub> binnen	het geluidswaarniveau L <sub>WA</sub> binnen	le niveau de puissance acoustique L <sub>WA</sub> à l'intérieur	il livello di potenza sonora L <sub>WA</sub> all'interno	el nivel de potencia acústica L <sub>WA</sub> en interiores
14	Work only during off-peak hours	Work only during off-peak hours	fonctionner uniquement pendant les heures creuses	lavorare solo durante le ore notturne	funzionare solamente durante las horas de baja demanda
	Werk uitsluitend in de daluren	Werk uitsluitend in de daluren	fonctionner uniquement pendant les heures creuses	lavorare solo durante le ore notturne	funzionare solamente durante las horas de baja demanda
	komman anovaan kuluksienajan ulkopuolella	komman anovaan kuluksienajan ulkopuolella	fonctionner uniquement pendant les heures creuses	lavorare solo durante le ore notturne	funzionare solamente durante las horas de baja demanda
	Rated heat output under colder climate conditions	Rated heat output under colder climate conditions	la puissance thermique nominale, dans les conditions climatiques plus froides	la potenza termica nominale, in condizioni climatiche più fredde	la potencia calorífica nominal en condiciones climáticas más frías
15	de nominale warmteafgifte, onder koudere klimaatomstandigheden	de nominale warmteafgifte, onder koudere klimaatomstandigheden	la puissance thermique nominale, dans les conditions climatiques plus froides	la potenza termica nominale, in condizioni climatiche più fredde	la potencia calorífica nominal en condiciones climáticas más frías
	Iltaimittimykseen kylmissä ilmastoloosuhteissa	Iltaimittimykseen kylmissä ilmastoloosuhteissa	la puissance thermique nominale, dans les conditions climatiques plus froides	la potenza termica nominale, in condiciones climáticas más frías	la potencia calorífica nominal en condiciones climáticas más frías
	Rated heat output under warmer climate conditions	Rated heat output under warmer climate conditions	la puissance thermique nominale, dans les conditions climatiques plus chaudes	la potenza termica nominale, in condizioni climatiche più calde	la potencia calorífica nominal en condiciones climáticas más calidas
16	de nominale warmteafgifte, onder warmere klimaatomstandigheden	de nominale warmteafgifte, onder warmere klimaatomstandigheden	la puissance thermique nominale, dans les conditions climatiques plus chaudes	la potenza termica nominale, in condiciones climáticas más calidas	la potencia calorífica nominal en condiciones climáticas más calidas
	Iltaimittimykseen vuotuinen energiantuokitus (keskimääräisessä ilmastoloosuhteissa)	Iltaimittimykseen vuotuinen energiantuokitus (keskimääräisessä ilmastoloosuhteissa)	la puissance thermique nominale, dans les conditions climatiques plus chaudes	la potenza termica nominale, in condiciones climáticas más calidas	la potencia calorífica nominal en condiciones climáticas más calidas
	For space heating, annual energy consumption under colder climate conditions	For space heating, annual energy consumption under colder climate conditions	la puissance thermique nominale, dans les conditions climatiques plus chaudes	la potenza termica nominale, in condiciones climáticas más calidas	la potencia calorífica nominal en condiciones climáticas más calidas
17	voor ruimteverwarming, het jaarlijkse energieverbruik onder koudere klimaatomstandigheden	voor ruimteverwarming, het jaarlijkse energieverbruik onder koudere klimaatomstandigheden	la puissance thermique nominale, dans les conditions climatiques plus chaudes	la potenza termica nominale, in condiciones climáticas más calidas	la potencia calorífica nominal en condiciones climáticas más calidas
	Iltaimittimykseen vuotuinen energiantuokitus (keskimääräisessä ilmastoloosuhteissa)	Iltaimittimykseen vuotuinen energiantuokitus (keskimääräisessä ilmastoloosuhteissa)	la puissance thermique nominale, dans les conditions climatiques plus chaudes	la potenza termica nominale, in condiciones climáticas más calidas	la potencia calorífica nominal en condiciones climáticas más calidas
	For space heating, annual energy consumption under warmer climate conditions	For space heating, annual energy consumption under warmer climate conditions	la puissance thermique nominale, dans les conditions climatiques plus chaudes	la potenza termica nominale, in condiciones climáticas más calidas	la potencia calorífica nominal en condiciones climáticas más calidas
18	voor ruimteverwarming, het jaarlijkse energieverbruik onder warmere klimaatomstandigheden	voor ruimteverwarming, het jaarlijkse energieverbruik onder warmere klimaatomstandigheden	la puissance thermique nominale, dans les conditions climatiques plus chaudes	la potenza termica nominale, in condiciones climáticas más calidas	la potencia calorífica nominal en condiciones climáticas más calidas
	Iltaimittimykseen vuotuinen energiantuokitus (keskimääräisessä ilmastoloosuhteissa)	Iltaimittimykseen vuotuinen energiantuokitus (keskimääräisessä ilmastoloosuhteissa)	la puissance thermique nominale, dans les conditions climatiques plus chaudes	la potenza termica nominale, in condiciones climáticas más calidas	la potencia calorífica nominal en condiciones climáticas más calidas
	For water heating, annual energy consumption under colder climate conditions	For water heating, annual energy consumption under colder climate conditions	la puissance thermique nominale, dans les conditions climatiques plus chaudes	la potenza termica nominale, in condiciones climáticas más calidas	la potencia calorífica nominal en condiciones climáticas más calidas
19	voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder koudere klimaatomstandigheden	voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder koudere klimaatomstandigheden	la puissance thermique nominale, dans les conditions climatiques plus chaudes	la potenza termica nominale, in condiciones climáticas más calidas	la potencia calorífica nominal en condiciones climáticas más calidas
	vedenlämmitykseen vuotuinen sähkökuutus (keskimääräisessä ilmastoloosuhteissa)	vedenlämmitykseen vuotuinen sähkökuutus (keskimääräisessä ilmastoloosuhteissa)	la puissance thermique nominale, dans les conditions climatiques plus chaudes	la potenza termica nominale, in condiciones climáticas más calidas	la potencia calorífica nominal en condiciones climáticas más calidas
	For water heating, annual energy consumption under warmer climate conditions	For water heating, annual energy consumption under warmer climate conditions	la puissance thermique nominale, dans les conditions climatiques plus chaudes	la potenza termica nominale, in condiciones climáticas más calidas	la potencia calorífica nominal en condiciones climáticas más calidas
20	voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder warmere klimaatomstandigheden	voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder warmere klimaatomstandigheden	la puissance thermique nominale, dans les conditions climatiques plus chaudes	la potenza termica nominale, in condiciones climáticas más calidas	la potencia calorífica nominal en condiciones climáticas más calidas
	Iltaimittimykseen vuotuinen sähkökuutus (keskimääräisessä ilmastoloosuhteissa)	Iltaimittimykseen vuotuinen sähkökuutus (keskimääräisessä ilmastoloosuhteissa)	la puissance thermique nominale, dans les conditions climatiques plus chaudes	la potenza termica nominale, in condiciones climáticas más calidas	la potencia calorífica nominal en condiciones climáticas más calidas
	Seasonal space heating energy efficiency under colder climate conditions	Seasonal space heating energy efficiency under colder climate conditions	la puissance thermique nominale, dans les conditions climatiques plus chaudes	la potenza termica nominale, in condiciones climáticas más calidas	la potencia calorífica nominal en condiciones climáticas más calidas
21	de seizoengebonden energie-efficiëntie voor ruimteverwarming onder koudere klimaatomstandigheden	de seizoengebonden energie-efficiëntie voor ruimteverwarming onder koudere klimaatomstandigheden	la puissance thermique nominale, dans les conditions climatiques plus chaudes	la potenza termica nominale, in condiciones climáticas más calidas	la potencia calorífica nominal en condiciones climáticas más calidas
	Iltaimittimykseen kausittainen energiatuokitus (keskimääräisessä ilmastoloosuhteissa)	Iltaimittimykseen kausittainen energiatuokitus (keskimääräisessä ilmastoloosuhteissa)	la puissance thermique nominale, dans les conditions climatiques plus chaudes	la potenza termica nominale, in condiciones climáticas más calidas	la potencia calorífica nominal en condiciones climáticas más calidas
	Seasonal space heating energy efficiency under warmer climate conditions	Seasonal space heating energy efficiency under warmer climate conditions	la puissance thermique nominale, dans les conditions climatiques plus chaudes	la potenza termica nominale, in condiciones climáticas más calidas	la potencia calorífica nominal en condiciones climáticas más calidas
22	de seizoengebonden energie-efficiëntie voor ruimteverwarming onder warmere klimaatomstandigheden	de seizoengebonden energie-efficiëntie voor ruimteverwarming onder warmere klimaatomstandigheden	la puissance thermique nominale, dans les conditions climatiques plus chaudes	la potenza termica nominale, in condiciones climáticas más calidas	la potencia calorífica nominal en condiciones climáticas más calidas
	Iltaimittimykseen kausittainen energiatuokitus (keskimääräisessä ilmastoloosuhteissa)	Iltaimittimykseen kausittainen energiatuokitus (keskimääräisessä ilmastoloosuhteissa)	la puissance thermique nominale, dans les conditions climatiques plus chaudes	la potenza termica nominale, in condiciones climáticas más calidas	la potencia calorífica nominal en condiciones climáticas más calidas
	Water heating energy efficiency under colder climate conditions	Water heating energy efficiency under colder climate conditions	la puissance thermique nominale, dans les conditions climatiques plus chaudes	la potenza termica nominale, in condiciones climáticas más calidas	la potencia calorífica nominal en condiciones climáticas más calidas
23	de energie-efficiëntie voor waterverwarming onder koudere klimaatomstandigheden	de energie-efficiëntie voor waterverwarming onder koudere klimaatomstandigheden	la puissance thermique nominale, dans les conditions climatiques plus chaudes	la potenza termica nominale, in condiciones climáticas más calidas	la potencia calorífica nominal en condiciones climáticas más calidas
	vedenlämmitykseen energiatuokitus (keskimääräisessä ilmastoloosuhteissa)	vedenlämmitykseen energiatuokitus (keskimääräisessä ilmastoloosuhteissa)	la puissance thermique nominale, dans les conditions climatiques plus chaudes	la potenza termica nominale, in condiciones climáticas más calidas	la potencia calorífica nominal en condiciones climáticas más calidas
	Water heating energy efficiency under warmer climate conditions	Water heating energy efficiency under warmer climate conditions	la puissance thermique nominale, dans les conditions climatiques plus chaudes	la potenza termica nominale, in condiciones climáticas más calidas	la potencia calorífica nominal en condiciones climáticas más calidas
24	de energie-efficiëntie voor waterverwarming onder warmere klimaatomstandigheden	de energie-efficiëntie voor waterverwarming onder warmere klimaatomstandigheden	la puissance thermique nominale, dans les conditions climatiques plus chaudes	la potenza termica nominale, in condiciones climáticas más calidas	la potencia calorífica nominal en condiciones climáticas más calidas
	vedenlämmitykseen energiatuokitus (keskimääräisessä ilmastoloosuhteissa)	vedenlämmitykseen energiatuokitus (keskimääräisessä ilmastoloosuhteissa)	la puissance thermique nominale, dans les conditions climatiques plus chaudes	la potenza termica nominale, in condiciones climáticas más calidas	la potencia calorífica nominal en condiciones climáticas más calidas
	Sound power level L <sub>WA</sub> outdoor	Sound power level L <sub>WA</sub> outdoor	le niveau de puissance acoustique L <sub>WA</sub> im Freien	il livello di potenza sonora L <sub>WA</sub> all'esterno	el nivel de potencia acústica L <sub>WA</sub> en exteriores
25	het geluidswaarniveau L <sub>WA</sub> buiten	het geluidswaarniveau L <sub>WA</sub> buiten	le niveau de puissance acoustique L <sub>WA</sub> im Freien	il livello di potenza sonora L <sub>WA</sub> all'esterno	el nivel de potencia acústica L <sub>WA</sub> en exteriores
	Ääniteho L <sub>WA</sub> ulkona	Ääniteho L <sub>WA</sub> ulkona	le niveau de puissance acoustique L <sub>WA</sub> im Freien	il livello di potenza sonora L <sub>WA</sub> all'esterno	el nivel de potencia acústica L <sub>WA</sub> en exteriores

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SHWM60VAA
	Indoor unit:	EHSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.0	kW	Seasonal space heating energy efficiency	$\eta_s$	129	%
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj			
Tj = - 7 ° C	Pdh	5.3	kW	Tj = - 7 ° C	COPd	2.28	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 2 ° C	Pdh	4.4	kW	Tj = + 2 ° C	COPd	3.21	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 7 ° C	Pdh	4.1	kW	Tj = + 7 ° C	COPd	4.20	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = +12 ° C	Pdh	2.7	kW	Tj = +12 ° C	COPd	5.87	-
Degradation co-efficient (**)	Cdh	0.97	-				
Tj = bivalent temperature	Pdh	6.0	kW	Tj = bivalent temperature	COPd	2.00	-
Tj = operation limit temperature (***)	Pdh	6.0	kW	Tj = operation limit temperature (***)	COPd	2.00	-
Bivalent temperature	Tbiv	-10	° C	Operation limit temperature	TOL	-30	° C
Reference design conditions for space heating	Tdesignh	-10	° C	Heating water operating limit temperature	WTOL	60	° C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	Psup	0.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				
Other items							
Capacity control	variable			Rated air flow rate, outdoors	-	2220	m <sup>3</sup> /h
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA				
Annual energy consumption	Q <sub>HE</sub>	3761	kWh				

For heat pump combination heater:

Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Q <sub>elec</sub>	-	kWh				
Annual electricity consumption	AEC	-	kWh				

**Contact details**

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY

Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey

The identification and signature of the person empowered to bind the supplier:

Kenichi SAITO  
Manager, Quality Assurance Department  
TURKEY

斉藤 健一

\* Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

\* Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SHWM60VAA
	Indoor unit:	EHSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.0	kW	Seasonal space heating energy efficiency	$\eta_s$	184	%
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj			
Tj = - 7 ° C	Pdh	5.3	kW	Tj = - 7 ° C	COPd	3.39	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 2 ° C	Pdh	4.8	kW	Tj = + 2 ° C	COPd	4.76	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 7 ° C	Pdh	4.9	kW	Tj = + 7 ° C	COPd	5.90	-
Degradation co-efficient (**)	Cdh	0.98	-				
Tj = +12 ° C	Pdh	3.0	kW	Tj = +12 ° C	COPd	6.52	-
Degradation co-efficient (**)	Cdh	0.97	-				
Tj = bivalent temperature	Pdh	6.0	kW	Tj = bivalent temperature	COPd	2.74	-
Tj = operation limit temperature (***)	Pdh	6.0	kW	Tj = operation limit temperature (***)	COPd	2.74	-
Bivalent temperature	Tbiv	-10	° C	Operation limit temperature	TOL	-30	° C
Reference design conditions for space heating	Tdesignh	-10	° C	Heating water operating limit temperature	WTOL	60	° C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	Psup	0.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				
Other items							
Capacity control	variable			Rated air flow rate, outdoors	-	2220	m <sup>3</sup> /h
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA				
Annual energy consumption	Q <sub>HE</sub>	2655	kWh				

For heat pump combination heater:							
Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Q <sub>elec</sub>	-	kWh				
Annual electricity consumption	AEC	-	kWh				

**Contact details**

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY	Manisa OSB 4.Kisim Kccilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey
The identification and signature of the person empowered to bind the supplier;	Kenichi SAITO
The signature is signed in the average climate / medium-temperature section.	Manager, Quality Assurance Department
	TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SHWM60VAA
	Indoor unit:	EHSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.0	kW	Seasonal space heating energy efficiency	$\eta_s$	115	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	3.6	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	2.55	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	3.50	-
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	3.6	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	4.89	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	6.89	-
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	4.3	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	1.75	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-	T <sub>j</sub> = operation limit temperature (***)	COP <sub>d</sub>	1.42	-
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	3.1	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	1.75	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-	Operation limit temperature	TOL	-30	°C
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	4.9	kW	Heating water operating limit temperature	WTOL	60	°C
T <sub>j</sub> = operation limit temperature (***)	P <sub>dh</sub>	4.0	kW				
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	4.9	kW				
Bivalent temperature	T <sub>biv</sub>	-15	°C				
Reference design conditions for space heating	T <sub>designh</sub>	-22	°C				
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	2.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW	Type of energy input	Electrical		
Standby mode	P <sub>SB</sub>	0.015	kW				
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

**Other items**

Capacity control	variable			Rated air flow rate, outdoors	-	2220	m³/h
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA				
Annual energy consumption	Q <sub>HE</sub>	4993	kWh				

**For heat pump combination heater:**

Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Q <sub>elec</sub>	-	kWh				
Annual electricity consumption	AEC	-	kWh				

**Contact details**

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY	Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey
The identification and signature of the person empowered to bind the supplier:	Kenichi SAITO
The signature is signed in the average climate / medium-temperature section.	Manager, Quality Assurance Department
	TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating P<sub>designh</sub>, and the rated heat output of a supplementary heater P<sub>sup</sub> is equal to the supplementary capacity for heating sup(T<sub>j</sub>).

(\*\*) If C<sub>dh</sub> is not determined by measurement then the default degradation coefficient is C<sub>dh</sub> = 0.9.

(\*\*\*) If the declared TOL is lower than the T<sub>designh</sub> of the considered climate then the outdoor dry bulb temperature T<sub>j</sub> is equal to T<sub>designh</sub>.

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SHWM60VAA
	Indoor unit:	EHSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.0	kW	Seasonal space heating energy efficiency	$\eta_s$	138	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	3.6	kW	Tj = - 7 °C	COPd	3.21	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = + 2 °C	COPd	4.15	-
Tj = + 2 °C	Pdh	3.8	kW	Tj = + 7 °C	COPd	5.42	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = +12 °C	COPd	7.56	-
Tj = + 7 °C	Pdh	4.5	kW	Tj = bivalent temperature	COPd	2.05	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = operation limit temperature (***)	COPd	1.42	-
Tj = +12 °C	Pdh	3.1	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	2.05	-
Degradation co-efficient (**)	Cdh	0.96	-	Operation limit temperature	TOL	-30	°C
Tj = bivalent temperature	Pdh	5.1	kW	Heating water operating limit temperature	WTOL	60	°C
Tj = operation limit temperature (***)	Pdh	3.1	kW				
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	4.9	kW				
Bivalent temperature	Tbiv	-16	°C				
Reference design conditions for space heating	Tdesignh	-22	°C				
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	Psup	2.9	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW	Type of energy input	Electrical		
Standby mode	P <sub>SB</sub>	0.015	kW				
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				
Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2220	m³/h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA				
Annual energy consumption	Q <sub>HE</sub>	4202	kWh				

For heat pump combination heater:

Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Qelec	-	kWh				
Annual electricity consumption	AEC	-	kWh				

**Contact details**

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY	Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey
The identification and signature of the person empowered to bind the supplier:	Kenichi SAITO
The signature is signed in the average climate / medium-temperature section.	Manager, Quality Assurance Department
	TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.



**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SHWM60VAA
	Indoor unit:	EHSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit			
Rated heat output (*)	Prated	6.0	kW	Seasonal space heating energy efficiency	$\eta_s$	159	%			
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj						
Tj = - 7 ° C	Pdh	-	kW	Tj = - 7 ° C	COPd	-	-			
Degradation co-efficient (**)	Cdh	-	-							
Tj = + 2 ° C	Pdh	6.0	kW	Tj = + 2 ° C	COPd	2.10	-			
Degradation co-efficient (**)	Cdh	1.00	-							
Tj = + 7 ° C	Pdh	4.0	kW	Tj = + 7 ° C	COPd	3.28	-			
Degradation co-efficient (**)	Cdh	0.99	-							
Tj = +12 ° C	Pdh	4.5	kW	Tj = +12 ° C	COPd	6.16	-			
Degradation co-efficient (**)	Cdh	0.98	-							
Tj = bivalent temperature	Pdh	6.0	kW	Tj = bivalent temperature	COPd	2.10	-			
Tj = operation limit temperature (***)	Pdh	6.0	kW	Tj = operation limit temperature (***)	COPd	2.10	-			
Bivalent temperature	Tbiv	2	° C	Operation limit temperature	TOL	-30	° C			
Reference design conditions for space heating	Tdesignh	2	° C	Heating water operating limit temperature	WTOL	60	° C			
Power consumption in modes other than active mode				Supplementary heater						
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	Psup	0.0	kW			
Thermostat-off mode	P <sub>TO</sub>	0.015	kW							
Standby mode	P <sub>SB</sub>	0.015	kW							
Crankcase heater mode	P <sub>CK</sub>	0.000	kW							
Other items				Type of energy input						
Capacity control	variable			Electrical						
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA	Rated air flow rate, outdoors						
Annual energy consumption	Q <sub>HE</sub>	1980	kWh	-						
For heat pump combination heater:				2220						
Declared load profile	-			m <sup>3</sup> /h						
Daily electricity consumption	Q <sub>elec</sub>	-	kWh	Water heating energy efficiency						
Annual electricity consumption	AEC	-	kWh	$\eta_{wh}$						
Contact details				-						

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY				Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey			
The identification and signature of the person empowered to bind the supplier:				Kenichi SAITO			
The signature is signed in the average climate / medium-temperature section.				Manager, Quality Assurance Department			
				TURKEY			

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.



**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SHWM60VAA
	Indoor unit:	EHSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit			
Rated heat output (*)	Prated	6.0	kW	Seasonal space heating energy efficiency	$\eta_s$	220	%			
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj						
Tj = - 7 ° C	Pdh	-	kW	Tj = - 7 ° C	COPd	-	-			
Degradation co-efficient (**)	Cdh	-	-							
Tj = + 2 ° C	Pdh	6.0	kW	Tj = + 2 ° C	COPd	3.80	-			
Degradation co-efficient (**)	Cdh	0.99	-							
Tj = + 7 ° C	Pdh	4.4	kW	Tj = + 7 ° C	COPd	5.10	-			
Degradation co-efficient (**)	Cdh	0.98	-							
Tj = +12 ° C	Pdh	4.7	kW	Tj = +12 ° C	COPd	7.46	-			
Degradation co-efficient (**)	Cdh	0.98	-							
Tj = bivalent temperature	Pdh	6.0	kW	Tj = bivalent temperature	COPd	3.80	-			
Tj = operation limit temperature (***)	Pdh	6.0	kW	Tj = operation limit temperature (***)	COPd	3.80	-			
Bivalent temperature	Tbiv	2	° C	Operation limit temperature	TOL	-30	° C			
Reference design conditions for space heating	Tdesignh	2	° C	Heating water operating limit temperature	WTOL	60	° C			
Power consumption in modes other than active mode				Supplementary heater						
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	Psup	0.0	kW			
Thermostat-off mode	P <sub>TO</sub>	0.015	kW							
Standby mode	P <sub>SB</sub>	0.015	kW							
Crankcase heater mode	P <sub>CK</sub>	0.000	kW							
Other items				Type of energy input						
Capacity control	variable			Electrical						
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA	Rated air flow rate, outdoors						
Annual energy consumption	Q <sub>HE</sub>	1437	kWh	-	2220	m <sup>3</sup> /h				

For heat pump combination heater:

Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Qelec	-	kWh				
Annual electricity consumption	AEC	-	kWh				

**Contact details**

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY	Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey
The identification and signature of the person empowered to bind the supplier:	Kenichi SAITO
The signature is signed in the average climate / medium-temperature section.	Manager, Quality Assurance Department
	TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SHWM60VAA
	Indoor unit:	ERSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.0	kW	Seasonal space heating energy efficiency	$\eta_s$	131	%
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj			
Tj = - 7 ° C	Pdh	5.3	kW	Tj = - 7 ° C	COPd	2.28	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 2 ° C	Pdh	4.4	kW	Tj = + 2 ° C	COPd	3.21	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 7 ° C	Pdh	4.1	kW	Tj = + 7 ° C	COPd	4.20	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = +12 ° C	Pdh	2.7	kW	Tj = +12 ° C	COPd	5.87	-
Degradation co-efficient (**)	Cdh	0.97	-				
Tj = bivalent temperature	Pdh	6.0	kW	Tj = bivalent temperature	COPd	2.00	-
Tj = operation limit temperature (***)	Pdh	6.0	kW	Tj = operation limit temperature (***)	COPd	2.00	-
Bivalent temperature	Tbiv	-10	° C	Operation limit temperature	TOL	-30	° C
Reference design conditions for space heating	Tdesignh	-10	° C	Heating water operating limit temperature	WTOL	60	° C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	Psup	0.0	kW
Thermostat-off mode	P <sub>T0</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				


**Other items**

Capacity control	variable			Rated air flow rate, outdoors	-	2220	m³/h
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA				
Annual energy consumption	Q <sub>HE</sub>	3706	kWh				

**For heat pump combination heater:**

Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Q <sub>elec</sub>	-	kWh				
Annual electricity consumption	AEC	-	kWh				

**Contact details**

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY				Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey			
The identification and signature of the person empowered to bind the supplier:				Kenichi SAITO			
				Manager, Quality Assurance Department			
				TURKEY			

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SHWM60VAA
	Indoor unit:	ERSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit			
Rated heat output (*)	Prated	6.0	kW	Seasonal space heating energy efficiency	$\eta_s$	188	%			
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj						
Tj = - 7 ° C	Pdh	5.3	kW	Tj = - 7 ° C	COPd	3.39	-			
Degradation co-efficient (**)	Cdh	0.99	-							
Tj = + 2 ° C	Pdh	4.8	kW	Tj = + 2 ° C	COPd	4.76	-			
Degradation co-efficient (**)	Cdh	0.99	-							
Tj = + 7 ° C	Pdh	4.9	kW	Tj = + 7 ° C	COPd	5.90	-			
Degradation co-efficient (**)	Cdh	0.98	-							
Tj = +12 ° C	Pdh	3.0	kW	Tj = +12 ° C	COPd	6.52	-			
Degradation co-efficient (**)	Cdh	0.97	-							
Tj = bivalent temperature	Pdh	6.0	kW	Tj = bivalent temperature	COPd	2.74	-			
Tj = operation limit temperature (***)	Pdh	6.0	kW	Tj = operation limit temperature (***)	COPd	2.74	-			
Bivalent temperature	Tbiv	-10	° C	Operation limit temperature	TOL	-30	° C			
Reference design conditions for space heating	Tdesignh	-10	° C	Heating water operating limit temperature	WTOL	60	° C			
Power consumption in modes other than active mode				Supplementary heater						
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	Psup	0.0	kW			
Thermostat-off mode	P <sub>TO</sub>	0.015	kW							
Standby mode	P <sub>SB</sub>	0.015	kW							
Crankcase heater mode	P <sub>CK</sub>	0.000	kW							
Other items				Type of energy input						
Capacity control	variable			Electrical						
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA	Rated air flow rate, outdoors						
Annual energy consumption	Q <sub>HE</sub>	2600	kWh	-	2220	m <sup>3</sup> /h				

For heat pump combination heater:							
Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Q <sub>elec</sub>	-	kWh				
Annual electricity consumption	AEC	-	kWh				

Contact details							
MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY				Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey			
The identification and signature of the person empowered to bind the supplier;				Kenichi SAITO			
The signature is signed in the average climate / medium-temperature section.				Manager, Quality Assurance Department			
				TURKEY			

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SHWM60VAA
	Indoor unit:	ERSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.0	kW	Seasonal space heating energy efficiency	$\eta_s$	116	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	3.6	kW	Tj = - 7 °C	COPd	2.55	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = + 2 °C	COPd	3.50	-
Tj = + 2 °C	Pdh	3.6	kW	Tj = + 7 °C	COPd	4.89	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = +12 °C	COPd	6.89	-
Tj = + 7 °C	Pdh	4.3	kW	Tj = bivalent temperature	COPd	1.75	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = operation limit temperature (***)	COPd	1.42	-
Tj = +12 °C	Pdh	3.1	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	1.75	-
Degradation co-efficient (**)	Cdh	0.97	-	Operation limit temperature	TOL	-30	°C
Tj = bivalent temperature	Pdh	4.9	kW	Heating water operating limit temperature	WTOL	60	°C
Tj = operation limit temperature (***)	Pdh	4.0	kW				
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	4.9	kW				
Bivalent temperature	Tbiv	-15	°C				
Reference design conditions for space heating	Tdesignh	-22	°C				
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	Psup	2.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW	Type of energy input	Electrical		
Standby mode	P <sub>SB</sub>	0.015	kW				
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors	-	2220	m³/h
Capacity control	variable						
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA				
Annual energy consumption	Q <sub>HE</sub>	4960	kWh				

For heat pump combination heater:				Water heating energy efficiency	$\eta_{wh}$	-	%
Declared load profile	-						
Daily electricity consumption	Qelec	-	kWh				
Annual electricity consumption	AEC	-	kWh				

Contact details				Mitsubishi Electric Air Conditioning Systems Manufacturing Turkey Joint Stock Company			
The identification and signature of the person empowered to bind the supplier:				Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey			
The signature is signed in the average climate / medium-temperature section.				Kenichi SAITO			
				Manager, Quality Assurance Department			
				TURKEY			

- Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.
  - Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.
- (\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
- (\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.
- (\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SHWM60VAA
	Indoor unit:	ERSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.0	kW	Seasonal space heating energy efficiency	$\eta_s$	139	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	3.6	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	3.21	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	4.15	-
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	3.8	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	5.42	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	7.56	-
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	4.5	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	2.05	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-	T <sub>j</sub> = operation limit temperature (***)	COP <sub>d</sub>	1.42	-
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	3.1	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	2.05	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.96	-	Operation limit temperature	TOL	-30	°C
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	5.1	kW	Heating water operating limit temperature	WTOL	60	°C
T <sub>j</sub> = operation limit temperature (***)	P <sub>dh</sub>	3.1	kW				
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	4.9	kW				
Bivalent temperature	T <sub>biv</sub>	-16	°C				
Reference design conditions for space heating	T <sub>designh</sub>	-22	°C				
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	2.9	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW	Type of energy input	Electrical		
Standby mode	P <sub>SB</sub>	0.015	kW				
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors	-	2220	m³/h
Capacity control	variable						
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA				
Annual energy consumption	Q <sub>HE</sub>	4168	kWh				

For heat pump combination heater:				Water heating energy efficiency	$\eta_{wh}$	-	%
Declared load profile	-						
Daily electricity consumption	Q <sub>elec</sub>	-	kWh				
Annual electricity consumption	AEC	-	kWh				

Contact details				Mitsubishi Electric Air Conditioning Systems Manufacturing Turkey Joint Stock Company			
				Manisa OSB 4.Kisim Kicilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey			
The identification and signature of the person empowered to bind the supplier:				Kenichi SAITO			
The signature is signed in the average climate / medium-temperature section.				Manager, Quality Assurance Department			
				TURKEY			

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.



**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SHWM60VAA
	Indoor unit:	ERSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit			
Rated heat output (*)	Prated	6.0	kW	Seasonal space heating energy efficiency	$\eta_s$	165	%			
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj						
Tj = - 7 ° C	Pdh	-	kW	Tj = - 7 ° C	COPd	-	-			
Degradation co-efficient (**)	Cdh	-	-							
Tj = + 2 ° C	Pdh	6.0	kW	Tj = + 2 ° C	COPd	2.10	-			
Degradation co-efficient (**)	Cdh	1.00	-							
Tj = + 7 ° C	Pdh	4.0	kW	Tj = + 7 ° C	COPd	3.28	-			
Degradation co-efficient (**)	Cdh	0.99	-							
Tj = +12 ° C	Pdh	4.5	kW	Tj = +12 ° C	COPd	6.16	-			
Degradation co-efficient (**)	Cdh	0.98	-							
Tj = bivalent temperature	Pdh	6.0	kW	Tj = bivalent temperature	COPd	2.10	-			
Tj = operation limit temperature (***)	Pdh	6.0	kW	Tj = operation limit temperature (***)	COPd	2.10	-			
Bivalent temperature	Tbiv	2	° C	Operation limit temperature	TOL	-30	° C			
Reference design conditions for space heating	Tdesignh	2	° C	Heating water operating limit temperature	WTOL	60	° C			
Power consumption in modes other than active mode				Supplementary heater						
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	0.0	kW			
Thermostat-off mode	P <sub>TO</sub>	0.015	kW							
Standby mode	P <sub>SB</sub>	0.015	kW							
Crankcase heater mode	P <sub>CK</sub>	0.000	kW							
Other items				Type of energy input						
Capacity control	variable			Electrical						
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA	Rated air flow rate, outdoors						
Annual energy consumption	Q <sub>HE</sub>	1914	kWh	-	2220	m <sup>3</sup> /h				

For heat pump combination heater:

Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Q <sub>elec</sub>	-	kWh				
Annual electricity consumption	AEC	-	kWh				

Contact details

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY	Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey
The identification and signature of the person empowered to bind the supplier:	Kenichi SAITO
The signature is signed in the average climate / medium-temperature section.	Manager, Quality Assurance Department
	TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SHWM60VAA
	Indoor unit:	ERSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit			
Rated heat output (*)	Prated	6.0	kW	Seasonal space heating energy efficiency	$\eta_s$	231	%			
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj						
Tj = - 7 ° C	Pdh	-	kW	Tj = - 7 ° C	COPd	-	-			
Degradation co-efficient (**)	Cdh	-	-							
Tj = + 2 ° C	Pdh	6.0	kW	Tj = + 2 ° C	COPd	3.80	-			
Degradation co-efficient (**)	Cdh	0.99	-							
Tj = + 7 ° C	Pdh	4.4	kW	Tj = + 7 ° C	COPd	5.10	-			
Degradation co-efficient (**)	Cdh	0.98	-							
Tj = +12 ° C	Pdh	4.7	kW	Tj = +12 ° C	COPd	7.46	-			
Degradation co-efficient (**)	Cdh	0.98	-							
Tj = bivalent temperature	Pdh	6.0	kW	Tj = bivalent temperature	COPd	3.80	-			
Tj = operation limit temperature (***)	Pdh	6.0	kW	Tj = operation limit temperature (***)	COPd	3.80	-			
Bivalent temperature	Tbiv	2	° C	Operation limit temperature	TOL	-30	° C			
Reference design conditions for space heating	Tdesignh	2	° C	Heating water operating limit temperature	WTOL	60	° C			
Power consumption in modes other than active mode				Supplementary heater						
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	0.0	kW			
Thermostat-off mode	P <sub>TO</sub>	0.015	kW							
Standby mode	P <sub>SB</sub>	0.015	kW							
Crankcase heater mode	P <sub>CK</sub>	0.000	kW							
Other items				Type of energy input						
Capacity control	variable			Electrical						
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA	Rated air flow rate, outdoors						
Annual energy consumption	Q <sub>HE</sub>	1371	kWh	-						
For heat pump combination heater:				2220						
Declared load profile	-			m <sup>3</sup> /h						
Daily electricity consumption	Q <sub>elec</sub>	-	kWh	Water heating energy efficiency						
Annual electricity consumption	AEC	-	kWh	$\eta_{wh}$						
Contact details				-						

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY				Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey			
The identification and signature of the person empowered to bind the supplier:				Kenichi SAITO			
The signature is signed in the average climate / medium-temperature section.				Manager, Quality Assurance Department			
				TURKEY			

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SHWM60VAA
	Indoor unit:	EHSD-MED
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.0	kW	Seasonal space heating energy efficiency	$\eta_s$	129	%
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj			
Tj = - 7 ° C	Pdh	5.3	kW	Tj = - 7 ° C	COPd	2.28	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 2 ° C	Pdh	4.4	kW	Tj = + 2 ° C	COPd	3.21	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 7 ° C	Pdh	4.1	kW	Tj = + 7 ° C	COPd	4.20	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = +12 ° C	Pdh	2.7	kW	Tj = +12 ° C	COPd	5.87	-
Degradation co-efficient (**)	Cdh	0.97	-				
Tj = bivalent temperature	Pdh	6.0	kW	Tj = bivalent temperature	COPd	2.00	-
Tj = operation limit temperature (***)	Pdh	6.0	kW	Tj = operation limit temperature (***)	COPd	2.00	-
Bivalent temperature	Tbiv	-10	° C	Operation limit temperature	TOL	-30	° C
Reference design conditions for space heating	Tdesignh	-10	° C	Heating water operating limit temperature	WTOL	60	° C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	Psup	0.0	kW
Thermostat-off mode	P <sub>T0</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				


**Other items**

Capacity control	variable			Rated air flow rate, outdoors	-	2220	m³/h
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA				
Annual energy consumption	Q <sub>HE</sub>	3761	kWh				

**For heat pump combination heater:**

Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Q <sub>elec</sub>	-	kWh				
Annual electricity consumption	AEC	-	kWh				

**Contact details**

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY				Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey			
The identification and signature of the person empowered to bind the supplier:				Kenichi SAITO			
				Manager, Quality Assurance Department			
				TURKEY			

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SHWM60VAA
	Indoor unit:	EHSD-MED
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit			
Rated heat output (*)	Prated	6.0	kW	Seasonal space heating energy efficiency	$\eta_s$	184	%			
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj						
Tj = - 7 ° C	Pdh	5.3	kW	Tj = - 7 ° C	COPd	3.39	-			
Degradation co-efficient (**)	Cdh	0.99	-							
Tj = + 2 ° C	Pdh	4.8	kW	Tj = + 2 ° C	COPd	4.76	-			
Degradation co-efficient (**)	Cdh	0.99	-							
Tj = + 7 ° C	Pdh	4.9	kW	Tj = + 7 ° C	COPd	5.90	-			
Degradation co-efficient (**)	Cdh	0.98	-							
Tj = +12 ° C	Pdh	3.0	kW	Tj = +12 ° C	COPd	6.52	-			
Degradation co-efficient (**)	Cdh	0.97	-							
Tj = bivalent temperature	Pdh	6.0	kW	Tj = bivalent temperature	COPd	2.74	-			
Tj = operation limit temperature (***)	Pdh	6.0	kW	Tj = operation limit temperature (***)	COPd	2.74	-			
Bivalent temperature	Tbiv	-10	° C	Operation limit temperature	TOL	-30	° C			
Reference design conditions for space heating	Tdesignh	-10	° C	Heating water operating limit temperature	WTOL	60	° C			
Power consumption in modes other than active mode				Supplementary heater						
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	0.0	kW			
Thermostat-off mode	P <sub>TO</sub>	0.015	kW							
Standby mode	P <sub>SB</sub>	0.015	kW							
Crankcase heater mode	P <sub>CK</sub>	0.000	kW							
Other items				Type of energy input						
Capacity control	variable			Electrical						
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA	Rated air flow rate, outdoors						
Annual energy consumption	Q <sub>HE</sub>	2655	kWh	-	2220	m <sup>3</sup> /h				

For heat pump combination heater:							
Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Q <sub>elec</sub>	-	kWh				
Annual electricity consumption	AEC	-	kWh				

Contact details							
MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY				Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey			
The identification and signature of the person empowered to bind the supplier;				Kenichi SAITO			
The signature is signed in the average climate / medium-temperature section.				Manager, Quality Assurance Department			
				TURKEY			

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

· Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SHWM60VAA
	Indoor unit:	EHSD-MED
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.0	kW	Seasonal space heating energy efficiency	$\eta_s$	115	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	3.6	kW	Tj = - 7 °C	COPd	2.55	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = + 2 °C	COPd	3.50	-
Tj = + 2 °C	Pdh	3.6	kW	Tj = + 7 °C	COPd	4.89	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = +12 °C	COPd	6.89	-
Tj = + 7 °C	Pdh	4.3	kW	Tj = bivalent temperature	COPd	1.75	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = operation limit temperature (***)	COPd	1.42	-
Tj = +12 °C	Pdh	3.1	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	1.75	-
Degradation co-efficient (**)	Cdh	0.97	-	Operation limit temperature	TOL	-30	°C
Tj = bivalent temperature	Pdh	4.9	kW	Heating water operating limit temperature	WTOL	60	°C
Tj = operation limit temperature (***)	Pdh	4.0	kW				
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	4.9	kW				
Bivalent temperature	Tbiv	-15	°C				
Reference design conditions for space heating	Tdesignh	-22	°C				
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	Psup	2.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW	Type of energy input	Electrical		
Standby mode	P <sub>SB</sub>	0.015	kW				
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors	-	2220	m³/h
Capacity control	variable						
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA				
Annual energy consumption	Q <sub>HE</sub>	4993	kWh				

For heat pump combination heater:				Water heating energy efficiency	$\eta_{wh}$	-	%
Declared load profile	-						
Daily electricity consumption	Qelec	-	kWh				
Annual electricity consumption	AEC	-	kWh				

Contact details				Mitsubishi Electric Air Conditioning Systems Manufacturing Turkey Joint Stock Company			
				Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey			
The identification and signature of the person empowered to bind the supplier:				Kenichi SAITO			
The signature is signed in the average climate / medium-temperature section.				Manager, Quality Assurance Department			
				TURKEY			

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.



**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SHWM60VAA
	Indoor unit:	EHSD-MED
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.0	kW	Seasonal space heating energy efficiency	$\eta_s$	138	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	3.6	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	3.21	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	4.15	-
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	3.8	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	5.42	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	7.56	-
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	4.5	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	2.05	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-	T <sub>j</sub> = operation limit temperature (***)	COP <sub>d</sub>	1.42	-
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	3.1	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	2.05	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.96	-	Operation limit temperature	TOL	-30	°C
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	5.1	kW	Heating water operating limit temperature	WTOL	60	°C
T <sub>j</sub> = operation limit temperature (***)	P <sub>dh</sub>	3.1	kW				
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	4.9	kW				
Bivalent temperature	T <sub>biv</sub>	-16	°C				
Reference design conditions for space heating	T <sub>designh</sub>	-22	°C				
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	2.9	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW	Type of energy input	Electrical		
Standby mode	P <sub>SB</sub>	0.015	kW				
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

**Other items**

Capacity control	variable			Rated air flow rate, outdoors	-	2220	m³/h
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA				
Annual energy consumption	Q <sub>HE</sub>	4202	kWh				

**For heat pump combination heater:**

Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Q <sub>elec</sub>	-	kWh				
Annual electricity consumption	AEC	-	kWh				

**Contact details**

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY	Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey
The identification and signature of the person empowered to bind the supplier:	Kenichi SAITO
The signature is signed in the average climate / medium-temperature section.	Manager, Quality Assurance Department
	TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating P<sub>designh</sub>, and the rated heat output of a supplementary heater P<sub>sup</sub> is equal to the supplementary capacity for heating sup(T<sub>j</sub>).

(\*\*) If C<sub>dh</sub> is not determined by measurement then the default degradation coefficient is C<sub>dh</sub> = 0.9.

(\*\*\*) If the declared TOL is lower than the T<sub>designh</sub> of the considered climate then the outdoor dry bulb temperature T<sub>j</sub> is equal to T<sub>designh</sub>.

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SHWM60VAA
	Indoor unit:	EHSD-MED
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit			
Rated heat output (*)	Prated	6.0	kW	Seasonal space heating energy efficiency	$\eta_s$	159	%			
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj						
Tj = - 7 ° C	Pdh	-	kW	Tj = - 7 ° C	COPd	-	-			
Degradation co-efficient (**)	Cdh	-	-							
Tj = + 2 ° C	Pdh	6.0	kW	Tj = + 2 ° C	COPd	2.10	-			
Degradation co-efficient (**)	Cdh	1.00	-							
Tj = + 7 ° C	Pdh	4.0	kW	Tj = + 7 ° C	COPd	3.28	-			
Degradation co-efficient (**)	Cdh	0.99	-							
Tj = +12 ° C	Pdh	4.5	kW	Tj = +12 ° C	COPd	6.16	-			
Degradation co-efficient (**)	Cdh	0.98	-							
Tj = bivalent temperature	Pdh	6.0	kW	Tj = bivalent temperature	COPd	2.10	-			
Tj = operation limit temperature (***)	Pdh	6.0	kW	Tj = operation limit temperature (***)	COPd	2.10	-			
Bivalent temperature	Tbiv	2	° C	Operation limit temperature	TOL	-30	° C			
Reference design conditions for space heating	Tdesignh	2	° C	Heating water operating limit temperature	WTOL	60	° C			
Power consumption in modes other than active mode				Supplementary heater						
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	0.0	kW			
Thermostat-off mode	P <sub>TO</sub>	0.015	kW							
Standby mode	P <sub>SB</sub>	0.015	kW							
Crankcase heater mode	P <sub>CK</sub>	0.000	kW							
Other items				Type of energy input						
Capacity control	variable			Electrical						
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA	Rated air flow rate, outdoors						
Annual energy consumption	Q <sub>HE</sub>	1980	kWh	-						
				2220						
Declared load profile				m <sup>3</sup> /h						
Daily electricity consumption	Q <sub>elec</sub>	-	kWh	Water heating energy efficiency						
Annual electricity consumption	AEC	-	kWh	$\eta_{wh}$						
Contact details				-						

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY				Manisa OSB 4.Kisim Kccilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey			
The identification and signature of the person empowered to bind the supplier:				Kenichi SAITO			
The signature is signed in the average climate / medium-temperature section.				Manager, Quality Assurance Department			
				TURKEY			

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SHWM60VAA
	Indoor unit:	EHSD-MED
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit			
Rated heat output (*)	Prated	6.0	kW	Seasonal space heating energy efficiency	$\eta_s$	220	%			
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj						
Tj = - 7 °C	Pdh	-	kW	Tj = - 7 °C	COPd	-	-			
Degradation co-efficient (**)	Cdh	-	-							
Tj = + 2 °C	Pdh	6.0	kW	Tj = + 2 °C	COPd	3.80	-			
Degradation co-efficient (**)	Cdh	0.99	-							
Tj = + 7 °C	Pdh	4.4	kW	Tj = + 7 °C	COPd	5.10	-			
Degradation co-efficient (**)	Cdh	0.98	-							
Tj = +12 °C	Pdh	4.7	kW	Tj = +12 °C	COPd	7.46	-			
Degradation co-efficient (**)	Cdh	0.98	-							
Tj = bivalent temperature	Pdh	6.0	kW	Tj = bivalent temperature	COPd	3.80	-			
Tj = operation limit temperature (***)	Pdh	6.0	kW	Tj = operation limit temperature (***)	COPd	3.80	-			
Bivalent temperature	Tbiv	2	°C	Operation limit temperature	TOL	-30	°C			
Reference design conditions for space heating	Tdesignh	2	°C	Heating water operating limit temperature	WTOL	60	°C			
Power consumption in modes other than active mode				Supplementary heater						
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	0.0	kW			
Thermostat-off mode	P <sub>TO</sub>	0.015	kW							
Standby mode	P <sub>SB</sub>	0.015	kW							
Crankcase heater mode	P <sub>CK</sub>	0.000	kW							
Other items				Type of energy input						
Capacity control	variable			Electrical						
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA	Rated air flow rate, outdoors						
Annual energy consumption	Q <sub>HE</sub>	1437	kWh	-	2220	m <sup>3</sup> /h				

For heat pump combination heater:

Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Qelec	-	kWh				
Annual electricity consumption	AEC	-	kWh				

**Contact details**

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY	Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey
The identification and signature of the person empowered to bind the supplier:	Kenichi SAITO
The signature is signed in the average climate / medium-temperature section.	Manager, Quality Assurance Department
	TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SHWM60VAA
	Indoor unit:	ERSD-MED
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.0	kW	Seasonal space heating energy efficiency	$\eta_s$	131	%
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj			
Tj = - 7 ° C	Pdh	5.3	kW	Tj = - 7 ° C	COPd	2.28	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 2 ° C	Pdh	4.4	kW	Tj = + 2 ° C	COPd	3.21	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 7 ° C	Pdh	4.1	kW	Tj = + 7 ° C	COPd	4.20	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = +12 ° C	Pdh	2.7	kW	Tj = +12 ° C	COPd	5.87	-
Degradation co-efficient (**)	Cdh	0.97	-				
Tj = bivalent temperature	Pdh	6.0	kW	Tj = bivalent temperature	COPd	2.00	-
Tj = operation limit temperature (***)	Pdh	6.0	kW	Tj = operation limit temperature (***)	COPd	2.00	-
Bivalent temperature	Tbiv	-10	° C	Operation limit temperature	TOL	-30	° C
Reference design conditions for space heating	Tdesignh	-10	° C	Heating water operating limit temperature	WTOL	60	° C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	Psup	0.0	kW
Thermostat-off mode	P <sub>T0</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				


**Other items**

Capacity control	variable			Rated air flow rate, outdoors	-	2220	m³/h
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA				
Annual energy consumption	Q <sub>HE</sub>	3706	kWh				

**For heat pump combination heater:**

Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Q <sub>elec</sub>	-	kWh				
Annual electricity consumption	AEC	-	kWh				

**Contact details**

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY				Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey			
The identification and signature of the person empowered to bind the supplier:				Kenichi SAITO			
				Manager, Quality Assurance Department			
				TURKEY			

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SHWM60VAA
	Indoor unit:	ERSD-MED
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.0	kW	Seasonal space heating energy efficiency	$\eta_s$	188	%
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj			
Tj = - 7 ° C	Pdh	5.3	kW	Tj = - 7 ° C	COPd	3.39	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 2 ° C	Pdh	4.8	kW	Tj = + 2 ° C	COPd	4.76	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 7 ° C	Pdh	4.9	kW	Tj = + 7 ° C	COPd	5.90	-
Degradation co-efficient (**)	Cdh	0.98	-				
Tj = +12 ° C	Pdh	3.0	kW	Tj = +12 ° C	COPd	6.52	-
Degradation co-efficient (**)	Cdh	0.97	-				
Tj = bivalent temperature	Pdh	6.0	kW	Tj = bivalent temperature	COPd	2.74	-
Tj = operation limit temperature (***)	Pdh	6.0	kW	Tj = operation limit temperature (***)	COPd	2.74	-
Bivalent temperature	Tbiv	-10	° C	Operation limit temperature	TOL	-30	° C
Reference design conditions for space heating	Tdesignh	-10	° C	Heating water operating limit temperature	WTOL	60	° C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	Psup	0.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				
Other items							
Capacity control	variable			Rated air flow rate, outdoors	-	2220	m <sup>3</sup> /h
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA				
Annual energy consumption	Q <sub>HE</sub>	2600	kWh				

For heat pump combination heater:							
Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Q <sub>elec</sub>	-	kWh				
Annual electricity consumption	AEC	-	kWh				

**Contact details**

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY	Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey
The identification and signature of the person empowered to bind the supplier;	Kenichi SAITO
The signature is signed in the average climate / medium-temperature section.	Manager, Quality Assurance Department
	TURKEY

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

· Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.



**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SHWM60VAA
	Indoor unit:	ERSD-MED
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.0	kW	Seasonal space heating energy efficiency	$\eta_s$	116	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	3.6	kW	Tj = - 7 °C	COPd	2.55	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = + 2 °C	COPd	3.50	-
Tj = + 2 °C	Pdh	3.6	kW	Tj = + 7 °C	COPd	4.89	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = +12 °C	COPd	6.89	-
Tj = + 7 °C	Pdh	4.3	kW	Tj = bivalent temperature	COPd	1.75	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = operation limit temperature (***)	COPd	1.42	-
Tj = +12 °C	Pdh	3.1	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	1.75	-
Degradation co-efficient (**)	Cdh	0.97	-	Operation limit temperature	TOL	-30	°C
Tj = bivalent temperature	Pdh	4.9	kW	Heating water operating limit temperature	WTOL	60	°C
Tj = operation limit temperature (***)	Pdh	4.0	kW				
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	4.9	kW				
Bivalent temperature	Tbiv	-15	°C				
Reference design conditions for space heating	Tdesignh	-22	°C				
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	Psup	2.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW	Type of energy input	Electrical		
Standby mode	P <sub>SB</sub>	0.015	kW				
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

**Other items**

Capacity control	variable			Rated air flow rate, outdoors	-	2220	m³/h
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA				
Annual energy consumption	Q <sub>HE</sub>	4960	kWh				

**For heat pump combination heater:**

Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Qelec	-	kWh				
Annual electricity consumption	AEC	-	kWh				

**Contact details**

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY	Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey
The identification and signature of the person empowered to bind the supplier:	Kenichi SAITO
The signature is signed in the average climate / medium-temperature section.	Manager, Quality Assurance Department
	TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SHWM60VAA
	Indoor unit:	ERSD-MED
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.0	kW	Seasonal space heating energy efficiency	$\eta_s$	139	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	3.6	kW	Tj = - 7 °C	COPd	3.21	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = + 2 °C	COPd	4.15	-
Tj = + 2 °C	Pdh	3.8	kW	Tj = + 7 °C	COPd	5.42	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = +12 °C	COPd	7.56	-
Tj = + 7 °C	Pdh	4.5	kW	Tj = bivalent temperature	COPd	2.05	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = operation limit temperature (***)	COPd	1.42	-
Tj = +12 °C	Pdh	3.1	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	2.05	-
Degradation co-efficient (**)	Cdh	0.96	-	Operation limit temperature	TOL	-30	°C
Tj = bivalent temperature	Pdh	5.1	kW	Heating water operating limit temperature	WTOL	60	°C
Tj = operation limit temperature (***)	Pdh	3.1	kW				
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	4.9	kW				
Bivalent temperature	Tbiv	-16	°C				
Reference design conditions for space heating	Tdesignh	-22	°C				
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	Psup	2.9	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW	Type of energy input	Electrical		
Standby mode	P <sub>SB</sub>	0.015	kW				
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

**Other items**

Capacity control	variable			Rated air flow rate, outdoors	-	2220	m³/h
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA				
Annual energy consumption	Q <sub>HE</sub>	4168	kWh				

**For heat pump combination heater:**

Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Qelec	-	kWh				
Annual electricity consumption	AEC	-	kWh				

**Contact details**

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY	Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey
The identification and signature of the person empowered to bind the supplier:	Kenichi SAITO
The signature is signed in the average climate / medium-temperature section.	Manager, Quality Assurance Department
	TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SHWM60VAA
	Indoor unit:	ERSD-MED
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit			
Rated heat output (*)	Prated	6.0	kW	Seasonal space heating energy efficiency	$\eta_s$	165	%			
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj						
Tj = - 7 ° C	Pdh	-	kW	Tj = - 7 ° C	COPd	-	-			
Degradation co-efficient (**)	Cdh	-	-							
Tj = + 2 ° C	Pdh	6.0	kW	Tj = + 2 ° C	COPd	2.10	-			
Degradation co-efficient (**)	Cdh	1.00	-							
Tj = + 7 ° C	Pdh	4.0	kW	Tj = + 7 ° C	COPd	3.28	-			
Degradation co-efficient (**)	Cdh	0.99	-							
Tj = +12 ° C	Pdh	4.5	kW	Tj = +12 ° C	COPd	6.16	-			
Degradation co-efficient (**)	Cdh	0.98	-							
Tj = bivalent temperature	Pdh	6.0	kW	Tj = bivalent temperature	COPd	2.10	-			
Tj = operation limit temperature (***)	Pdh	6.0	kW	Tj = operation limit temperature (***)	COPd	2.10	-			
Bivalent temperature	Tbiv	2	° C	Operation limit temperature	TOL	-30	° C			
Reference design conditions for space heating	Tdesignh	2	° C	Heating water operating limit temperature	WTOL	60	° C			
Power consumption in modes other than active mode				Supplementary heater						
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	0.0	kW			
Thermostat-off mode	P <sub>TO</sub>	0.015	kW							
Standby mode	P <sub>SB</sub>	0.015	kW							
Crankcase heater mode	P <sub>CK</sub>	0.000	kW							
Other items				Type of energy input						
Capacity control	variable			Electrical						
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA	Rated air flow rate, outdoors						
Annual energy consumption	Q <sub>HE</sub>	1914	kWh	-						
For heat pump combination heater:				2220						
Declared load profile	-			m <sup>3</sup> /h						
Daily electricity consumption	Q <sub>elec</sub>	-	kWh	Water heating energy efficiency						
Annual electricity consumption	AEC	-	kWh	$\eta_{wh}$						
Contact details				-						

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY				Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey			
The identification and signature of the person empowered to bind the supplier:				Kenichi SAITO			
The signature is signed in the average climate / medium-temperature section.				Manager, Quality Assurance Department			
				TURKEY			

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

· Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SHWM60VAA
	Indoor unit:	ERSD-MED
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit			
Rated heat output (*)	Prated	6.0	kW	Seasonal space heating energy efficiency	$\eta_s$	231	%			
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj						
Tj = - 7 ° C	Pdh	-	kW	Tj = - 7 ° C	COPd	-	-			
Degradation co-efficient (**)	Cdh	-	-							
Tj = + 2 ° C	Pdh	6.0	kW	Tj = + 2 ° C	COPd	3.80	-			
Degradation co-efficient (**)	Cdh	0.99	-							
Tj = + 7 ° C	Pdh	4.4	kW	Tj = + 7 ° C	COPd	5.10	-			
Degradation co-efficient (**)	Cdh	0.98	-							
Tj = +12 ° C	Pdh	4.7	kW	Tj = +12 ° C	COPd	7.46	-			
Degradation co-efficient (**)	Cdh	0.98	-							
Tj = bivalent temperature	Pdh	6.0	kW	Tj = bivalent temperature	COPd	3.80	-			
Tj = operation limit temperature (***)	Pdh	6.0	kW	Tj = operation limit temperature (***)	COPd	3.80	-			
Bivalent temperature	Tbiv	2	° C	Operation limit temperature	TOL	-30	° C			
Reference design conditions for space heating	Tdesignh	2	° C	Heating water operating limit temperature	WTOL	60	° C			
Power consumption in modes other than active mode				Supplementary heater						
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	Psup	0.0	kW			
Thermostat-off mode	P <sub>TO</sub>	0.015	kW							
Standby mode	P <sub>SB</sub>	0.015	kW							
Crankcase heater mode	P <sub>CK</sub>	0.000	kW							
Other items				Type of energy input						
Capacity control	variable			Electrical						
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA	Rated air flow rate, outdoors						
Annual energy consumption	Q <sub>HE</sub>	1371	kWh	-	2220	m <sup>3</sup> /h				

For heat pump combination heater:

Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Qelec	-	kWh				
Annual electricity consumption	AEC	-	kWh				

**Contact details**

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY	Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey
The identification and signature of the person empowered to bind the supplier:	Kenichi SAITO
The signature is signed in the average climate / medium-temperature section.	Manager, Quality Assurance Department
	TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.