




ENERG
енергия · ενεργεια

Y IJA
IE IA




Model Indoor unit **MSZ-HJ71VA**
Outdoor unit **MUZ-HJ71VA**

SEER

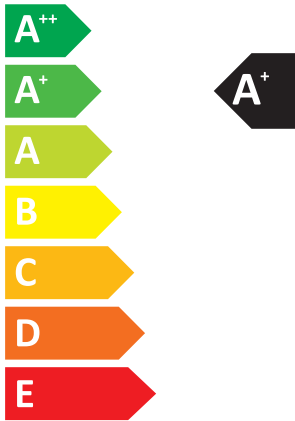

kW **7,1**
SEER **5,6**
kWh/annum **441**

SCOP

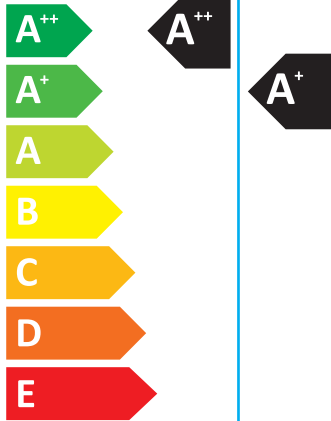

kW	2,9	5,4	X
SCOP	4,9	4,0	X
kWh/annum	813	1854	X



65dB



66dB



ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ · ENERGIJA · ENERGY · ENERGIE · ENERGI
626/2011

JG79B469H01

PRODUCT INFORMATION (*)

ROOM AIR CONDITIONER	INDOOR MODEL	MSZ-HJ71VA
	OUTDOOR MODEL	MUZ-HJ71VA

Function (indicate if present)	
cooling	Y
heating	Y

If function includes heating: Indicate the heating season the information relates to. Indicated values should relate to one heating season at a time. Include at least the heating season	
Average (mandatory)	Y
Warmer (if designated)	Y
Colder (if designated)	N

Item	symbol	value	unit
Design load			
cooling	Pdesignc	7.1	kW
heating/Average	Pdesignh	5.4	kW
heating/Warmer	Pdesignh	3.0	kW
heating/Colder	Pdesignh	x	kW

Item	symbol	value	unit
Seasonal efficiency			
cooling	SEER	5.6	-
heating/Average	SCOP/A	4.0	-
heating/Warmer	SCOP/W	5.0	-
heating/Colder	SCOP/C	x	-

Declared capacity for cooling, at indoor temperature 27(19)°C and outdoor temperature Tj			
Tj=35°C	Pdc	7.1	kW
Tj=30°C	Pdc	5.3	kW
Tj=25°C	Pdc	3.3	kW
Tj=20°C	Pdc	1.8	kW

Declared energy efficiency ratio, at indoor temperature 27(19)°C and outdoor temperature Tj			
Tj=35°C	EERd	3.0	-
Tj=30°C	EERd	4.5	-
Tj=25°C	EERd	6.3	-
Tj=20°C	EERd	8.7	-

Declared capacity for heating/Average season, at indoor temperature 20°C and outdoor temperature Tj			
Tj=-7°C	Pdh	4.8	kW
Tj=2°C	Pdh	3.0	kW
Tj=7°C	Pdh	1.8	kW
Tj=12°C	Pdh	1.7	kW
Tj=bivalent temperature	Pdh	5.4	kW
Tj=operating limit	Pdh	5.4	kW

Declared coefficient of performance/Average season, at indoor temperature 20°C and outdoor temperature Tj			
Tj=-7°C	COPd	2.7	-
Tj=2°C	COPd	4.1	-
Tj=7°C	COPd	5.0	-
Tj=12°C	COPd	6.1	-
Tj=bivalent temperature	COPd	2.4	-
Tj=operating limit	COPd	2.4	-

Declared capacity for heating/Warmer season, at indoor temperature 20°C and outdoor temperature Tj			
Tj=2°C	Pdh	3.0	kW
Tj=7°C	Pdh	1.8	kW
Tj=12°C	Pdh	1.7	kW
Tj=bivalent temperature	Pdh	3.0	kW
Tj=operating limit	Pdh	5.4	kW

Declared coefficient of performance/Warmer season, at indoor temperature 20°C and outdoor temperature Tj			
Tj=2°C	COPd	4.1	-
Tj=7°C	COPd	5.0	-
Tj=12°C	COPd	6.1	-
Tj=bivalent temperature	COPd	4.1	-
Tj=operating limit	COPd	2.4	-

Declared capacity for heating/Colder season, at indoor temperature 20°C and outdoor temperature Tj			
Tj=-7°C	Pdh	x	kW
Tj=2°C	Pdh	x	kW
Tj=7°C	Pdh	x	kW
Tj=12°C	Pdh	x	kW
Tj=bivalent temperature	Pdh	x	kW
Tj=operating limit	Pdh	x	kW
Tj=-15°C	Pdh	x	kW

Declared coefficient of performance/Colder season, at indoor temperature 20°C and outdoor temperature Tj			
Tj=-7°C	COPd	x	-
Tj=2°C	COPd	x	-
Tj=7°C	COPd	x	-
Tj=12°C	COPd	x	-
Tj=bivalent temperature	COPd	x	-
Tj=operating limit	COPd	x	-
Tj=-15°C	COPd	x	-

Bivalent temperature			
heating/Average	Tbiv	-10	°C
heating/Warmer	Tbiv	2	°C
heating/Colder	Tbiv	x	°C

Operating limit temperature			
heating/Average	Tol	-10	°C
heating/Warmer	Tol	-10	°C
heating/Colder	Tol	x	°C

Cycling interval capacity			
for cooling	Pcycc	x	kW
for heating	Pcyhc	x	kW
Degradation co-efficient	Cdc	0.25	-

Cycling interval efficiency			
for cooling	EERcyc	x	-
for heating	CECyc	x	-
Degradation co-efficient	Cdh	0.25	-

Electric power input in power modes other than 'active mode'			
off mode	POFF	1	W
standby mode	PSB	1	W
thermostat - off mode	PTO	20	W
crankcase heater mode	PCK	0	W


Annual electricity consumption			
cooling	QCE	441	kWh/a
heating/Average	QHE	1854	kWh/a
heating/Warmer	QHE	839	kWh/a
heating/Colder	QHE	x	kWh/a

Capacity control (indicate one of three options)	
fixed	N
staged	N
variable	Y

Other items			
Sound power level (indoor/outdoor)	LWA	65/66	dB(A)
Global warming potential	GWP	1975	kgCO ₂ eq.
Rated air flow (indoor/outdoor)	-	1170/295	m ³ /h

Contact details for obtaining more information	MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS 3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan E-mail: malshierp@MitsubishiElectric.co.jp
--	---

(*) This information is based on the "product information requirement" in COMMISSION REGULATION (EU) No206/2012.

TECHNICAL DOCUMENTATION (1)			
ROOM AIR CONDITIONER	INDOOR MODEL	MSZ-HJ71VA	305H923W250D (mm)
	OUTDOOR MODEL	MUZ-HJ71VA	880H840W330D (mm)
Function			
	cooling		Y
	heating		Y
The heating season			
	Average (mandatory)		Y
	Warmer (if designated)		Y
	Colder (if designated)		N
Capacity control			
	fixed		N
	staged		N
	variable		Y
Item	symbol	value	unit
Seasonal efficiency (2)			
cooling	SEER	5.6	-
heating/Average	SCOP/A	4.0	-
heating/Warmer	SCOP/W	5.0	-
heating/Colder	SCOP/C	x	-
Energy efficiency class			
cooling	SEER	A+	-
heating/Average	SCOP/A	A+	-
heating/Warmer	SCOP/W	A++	-
heating/Colder	SCOP/C	x	-
Other items			
Sound power level (indoor/outdoor)	LWA	65/66	dB(A)
Refrigerant	-	R410A	-
Global warming potential	GWP	1975	kgCO ₂ eq.
identification and signature of the person empowered to bind the supplier	 _____ Tomoyuki Miwa Department Manager, Quality Assurance Department MITSUBISHI ELECTRIC CONSUMER PRODUCTS (THAILAND) CO.,LTD		

(1) This information is based on COMMISSION DELEGATED REGULATION (EU)No626/2011.

(2) SEER/SCOP values are measured based on FprEN 14825:2011: Testing and rating at part load conditions and calculation of seasonal performance