





ENERG

енергия · ενεργεια



Model Indoor unit **PEAD-RP35JALQ**
Outdoor unit **SUZ-KA35VA6**

SEER

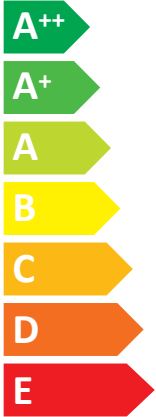


A+

kW **3,6**

SEER **5,9**

kWh/annum **213**

SCOP

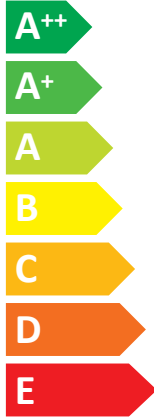

A+

kW **X 2,8 X**

SCOP **X 4,0 X**

kWh/annum **X 980 X**



52dB



62dB



ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ · ENERGIJA · ENERGY · ENERGIE · ENERGI

626/2011

| A Model | B Indoor unit | | PEAD-RP35JALQ | PEAD-RP50JALQ | PEAD-RP60JALQ | PEAD-RP71JALQ |
|--------------------------------------|---|----------------------------------|-------------------|---------------|---------------|---------------|
| | C Outdoor unit | | SUZ-KA35VA6 | SUZ-KA50VA6 | SUZ-KA60VA6 | SUZ-KA71VA6 |
| D Sound power levels on cooling mode | E Inside | dB | 52 | 57 | 55 | 57 |
| | F Outside | dB | 62 | 65 | 65 | 69 |
| G Refrigerant | | | R410A GWP 1975 *1 | | | |
| H Cooling | SEER | | 5,9 | 5,7 | 5,9 | 6,0 |
| | Energy efficiency class | | A+ | A+ | A+ | A+ |
| | Annual electricity consumption *2 kWh/a | | 213 | 301 | 335 | 413 |
| | Design load kW | | 3,6 | 4,9 | 5,7 | 7,1 |
| M Heating (Average season) | SCOP | | 4,0 | 4,2 | 4,0 | 3,9 |
| | Energy efficiency class | | A+ | A+ | A+ | A |
| | Annual electricity consumption *2 kWh/a | | 980 | 1466 | 1569 | 2153 |
| | Design load kW | | 2,8 | 4,4 | 4,5 | 6,0 |
| N Declared capacity | P at reference design temperature | R kW | 2,5 (-10°C) | 3,9 (-10°C) | 4,1 (-10°C) | 5,3 (-10°C) |
| | | S at bivalent temperature | 2,5 (-7°C) | 3,9 (-7°C) | 4,1 (-7°C) | 5,3 (-7°C) |
| | | T at operation limit temperature | 2,5 (-10°C) | 3,9 (-10°C) | 4,1 (-10°C) | 5,3 (-10°C) |
| O Back up heating capacity | | kW | 0,3 | 0,5 | 0,4 | 0,7 |

| | Deutsch | Italiano | Svenska | Polski | Eesti | Malti | Русский |
|---------------|--|---|---|--|--|---|---|
| | Français | Ελληνικά | Česky | Slovensko | Gaeilge | Suomi | Norsk |
| | Nederlands | Português | Slovensky | Български | Latviski | Türkçe | Українська |
| | Español | Dansk | Magyar | Română | Lietuvių k. | Hrvatski | |
| A | Modell | Modello | Modell | Model | Mudel | Mudell | Модель |
| | Modèle | Μοντέλο | Model | Model | Déanamh | Malli | Modell |
| | Model | Modelo | Model | Модел | Modelis | Model | Модель |
| | Modelo | Model | Modell | Model | Modelis | Model | |
| | Innengerät | Unità interna | Inomhusenhet | Jednostka wewnętrzna | Siseseade | Unità għal ġewwa | Внутренний прибор |
| B | Appareil intérieur | Εσωτερική μονάδα | Vnitřní jednotka | Notranja enota | Aonad laistigh | Sisäyksikkö | Innendørsenhet |
| | Binnenunit | Unidade interior | Vnitřní jednotka | Вътрешно тяло | Iekštelņu ierīce | İç ünite | Внутрішній блок |
| C | Unidad interior | Indendørsenhet | Beltéri egység | Unitate de interior | Patalpoje montuojamas įrenginys | Unutarnja jedinica | |
| | Außengerät | Unità esterna | Utomhusenhet | Jednostka zewnętrzna | Välisseade | Unità għal barra | Наружный прибор |
| D | Modèle extérieur | Εξωτερική μονάδα | Vnější jednotka | Zunanja enota | Aonad lasmuigh | Ulkoyksikkö | Utendørsenhet |
| | Buitenunit | Unidade exterior | Vonkăjšia jednotka | Външно тяло | Ārtelpas ierīce | Diş ünite | Зовнішній блок |
| E | Unidad exterior | Udendørsenhet | Kültéri egység | Unitate de exterior | Lauke montuojamas įrenginys | Vanjska jedinica | |
| | Schallleistungspegel im Kühlmodus | Livelli di potenza sonora in modalità di raffreddamento | Bulnenivå i nedkylningsläget | Poziom mocy dźwięku w trybie chłodzenia | Müratasemed jahutusrežiimis | Livelli tal-qawwa tal-hsejjes fil-modalità tat-kessih | Значения уровня звуковой мощности в режиме охлаждения |
| F | Niveaux de puissance corrects en mode de refroidissement | Επίπεδα ισχύος ήχου στην κατάσταση ψύξης | Úrovně hlučnosti v režimu chlazení | Ravni zvočne moči v načinu hlajenja | Leibhèil chumhachta fuaimè ar mhodh fuairthe | Äänenvoimakkuustasot viilennystilassa | Lydtrykknivåer i avkjølingsmodus |
| | Geluidsniveaus in koelstand | Níveis de potência sonora em modo de arrefecimento | Hladiny akustického výkonu v režime chladenia | Нива на звуковата мощност в режим на охлаждане | Akustiskās jaudas līmenis dzesēšanas režīmā | Soğutma modunda ses gücü düzeyleri | Рівні звукової потужності у режимі охолодження |
| G | Niveles de potencia del sonido en el modo de refrigeración | Lydstyrkeniveauer i kølefunktion | Hangnyomásszintek hűtés üzemmódban | Nivel sonor în modul de răcire | Garso galios lygis vėsinimo režimu | Razine zvučnog tlaka pri hlađenju | |
| | H | Innen | Interno | Insida | Wewnaŕtz | Sees | Ġewwa |
| À l'intérieur | | Εσωτερικό | Uvnitř | Znotraj | Laistigh | Sisäpuoli | Innendig |
| I | Binnenkant | Interior | Vo vnitři | Вътре | Iekštelpās | İç taraf | Усередині |
| | Interior | Indvendig | Bent | Interior | Vidinis | Unutra | |
| J | Außen | Esterno | Utsida | Na zewnaŕtz | Väljas | Barra | Снаружи |
| | À l'extérieur | Εξωτερικό | Venku | Zunaj | Lasmuigh | Ulko puoli | Utvendig |
| K | Butenkant | Exterior | Vonku | На открито | Ārtelpā | Diş taraf | Назовні |
| | Exterior | Udvendig | A szabadban | Exterior | Išorinis | Vani | |
| L | Kühlmittel | Refrigerante | Köldmedel | Czynnik chłodniczy | Külmutusagens | Refrigerant | Хладагент |
| | Réfrigérant | Ψυκτικό | Chladivo | Hladivo sredstvo | Cuisneán | Kylmäaine | Kjølemiddel |
| M | Koelmiddel | Refrigerante | Chladivo | Хладилен агент | Aukstumagents | Soğutucu | Холодоагент |
| | Refrigerante | Kølemiddel | Hűtőközeg | Refrigerent | Šaldalas | Rashladno sredstvo | |

| | Deutsch | Italiano | Svenska | Polski | Eesti | Malti | Русский |
|---|---|---|---|---|--|---|---|
| | Français | Ελληνικά | Česky | Slovensko | Gaeilge | Suomi | Norsk |
| | Nederlands | Português | Slovensky | Български | Latviski | Türkçe | Українська |
| | Español | Dansk | Magyar | Română | Lietuvių k. | Hrvatski | |
| H | Kühlen | Raffreddamento | Kyla | Chłodzenie | Jahutus | Tkessih | Охлаждение |
| | Refridissement | Ψύξη | Chlazení | Hlajenje | Fuarú | Viilennys | Avkjøling |
| | Koelen | Arrefecimento | Chladienie | Охлаждане | Dzesēšana | Soğutma | Охолодження |
| | Refrigeración | Køling | Hűtés | Рăcire | Vėsinimas | Hlađenje | |
| J | Energieeffizienzklasse | Classe di efficienza energetica | Energiklass | Klasa energetyczna | Energiatõhususe klass | Klassi tal-eficijenza fl-użu tal-enerġija | Класс эффективности использования энергии |
| | Classe d'efficacité énergétique | Κλάση ενεργειακής απόδοσης | Třída energetické účinnosti | Razred energetske učinkovitosti | Aicme éifeachtúlachta fuinnimh | Energiateghokkuusluokka | Energieeffektivitetsklasse |
| | Energieefficiëntieklasse | Classe de eficiencia energética | Trieda energetickej účinnosti | Клас на енергийна ефективност | Energoefektivitātes klase | Enerji verimlilik sınıfı | Клас ефективності енергоспоживання |
| | Clase de eficiencia energética | Energieeffektivitetsklasse | Energiahatékonysági osztály | Clasă de eficiență energetică | Energijos vartojimo efektyvumo klasė | Klasa energetske učinkovitosti | |
| K | Jahresstromverbrauch *2 | Consumo annuale di energia elettrica *2 | Årlig strömförbrukning *2 | Zużycie prądu w skali roku *2 | Aastane voolutarbimus *2 | Konsum annwali tal-elettriku *2 | Годовое потребление электроэнергии *2 |
| | Consommation d'électricité annuelle *2 | Ετήσια κατανάλωση ρεύματος *2 | Roční spotřeba elektrické energie *2 | Letna poraba elektrike *2 | Idüi leitreachais bhliantúil *2 | Vuotuinen sähkönkulutus *2 | Årlig strømforbruk *2 |
| | Jaarlijks elektriciteitsverbruik *2 | Consumo anual de electricidade *2 | Ročná spotreba elektriny *2 | Годишна консумация на електроенергия *2 | Gada elektroenerģijas patēriņš *2 | Yillik elektrik tüketimi *2 | Річне споживання електроенергії *2 |
| | Consumo anual de electricidad *2 | Årligt elforbrug *2 | Éves áramfogyasztás *2 | Consum anual de electricitate *2 | Metinis elektros energijos suvartojimas *2 | Godišnja potrošnja električne energije *2 | |
| L | Lastauslegung | Carico nominale | Dimensionerande belastning | Maksymalne obciążenie | Projekteeritud koormus | Tagħbija tad-disinn | Расчетная нагрузка |
| | Charge de calcul | Σχεδιασμός φόρτωσης | Jmenovitě zatížení | Nazivna obremenitev | Lõd dearthad | Laskettu kuormitus | Utformingsbelastning |
| | Ontwerpbelasting | Carga nominal | Projektované zaťaženie | Проектен товар | Aprēķina slodze | Tasarım yükü | Розрахункове навантаження |
| | Carga de diseño | Brugslast | Méretezési terhelés | Sarcinā nominalā | Projektinē apkrova | Težina uređaja | |
| M | Heizen (Jahresdurchschnitt / wärmeres Wetter) | Riscaldamento (Stagione media / calda) | Värme (Genomsnittlig/varmare årstid) | Ogrzewanie (Sezon umiarkowany/ciepły) | Kütmine (keskmise/soojaperiood) | Tishin (Staġun Medju / Aktar Shun) | Нагрев (средний/теплый сезон) |
| | Chauffage (moyenne saison / saison chaude) | Θέρμανση (Εποχή με μέσες / υψηλότερες θερμοκρασίες) | Topení (průměrná/teplá sezóna) | Ogrevanje (Povprečni/toplejši letni čas) | Téamh (Séasúr Meánach / Níos teo) | Lämmitys (Normaali / Lämpimämpi kausi) | Oppvarming (gjennomsnittlig / varmere årstid) |
| | Verwarmen (gemiddeld / warmer seizoen) | Aquecimento (Média estação / estação mais quente) | Vykurovanie (Priemerné/teplejšie obdobie) | Отопление (Средно / Топъл сезон) | Sildīšana (Vidējī siltā/siltā gadalaikā) | Istma (Ortalama / İlk mevsim) | Опалення (у середній/теплій сезон) |
| | Calefacción (Promedio / temporada más cálida) | Varme (gennemsnitlig/varmere sæson) | Fűtés (Átlagos/meleg évszak) | Încălzire (Anotimp normal/mai cald) | Šildymas (vidutinis / šiltuoju sezonu) | Zagrijavanje (Prosjek / toplija sezona) | |
| N | Nennkapazität | Capacità dichiarata | Deklarerad kapacitet | Deklarowana pojemność | Deklareeritud võimsus | Kapaċità ddiċjarata | Гарантированная мощность |
| | Capacité déclarée | Δηλωμένη χωρητικότητα | Udåvnad kapacitet | Prijavljena zmogljivost | Toileadh fógartha | Ilmoitettu teho | Erklæret kapasitet |
| | Aangegeven capaciteit | Capacidade declarada | Deklarovaný výkon | Объявлена мощность | Deklarētā jauda | Beyan edilen kapasite | Гарантована потужність |
| | Capacidad declarada | Erklæret kapacitet | Névléges teljesítmény | Capacitate declarată | Deklaruotasis pajėgumas | Deklarirani kapacitet | |
| O | bei angegebener Referenztemperatur | alla temperatura di progetto di riferimento | vid dimensionerande referenstempertur | w znamionowej temperaturze odniesienia | projekteerimise võrdlustemperatuur juures | f'temperatura tad-disinn ta' referenza | при эталонной расчетной температуре |
| | à la température de calcul de référence | σε θερμοκρασία σχεδιασμού αναφοράς | při referenční výpočtové teplotě | ob referenčni nazivni temperaturi | ag teocht deartha tagartha | perusmitoitulämpötilassa | ved referansetemperatur for utforming |
| | bij referentiewerkingtemperatuur | à temperatura nominal de referència | při referenční výpočtové teplotě | при изчислителна проектна температура | aprēķina references temperatūrā | referans tasarım sıcaklığında | При эталонній розрахунковій температурі |
| | a temperatura de diseño de referencia | ved brugsfahængig referencetemperatur | tervezési referenciához tartozó hőmérsékleten | la temperatura de referință nominală | esant norminei projektinei temperatūrai | pri referentnoj temperaturi | |
| P | bei bivalenter Temperatur | alla temperatura bivalente | vid valent temperatur | w bivalenten temperaturze | bivalentse temperatuuri juures | f'temperatura bivalenti | при бивалентной температуре |
| | à température bivalente | σε θερμοκρασία διθενοῦς λειτουργίας | při bivalentní teplotě | pri bivalentni temperaturi | ag teocht dhéfhíusach | kaksiarvoisessa lämpötilassa | ved bivalent temperatur |
| | bij bivalente temperatuur | à temperatura bivalente | při bivalentnej teplotě | при бивалентна температура | bivalentä temperatūrā | iki deđerli sıcaklıkta | При бивалентній температурі |
| | a temperatura bivalente | ved bivalent temperatur | bivalens hömésékleten | la temperatura de bivalentă | esant perėjimo į dvejopo šildymo režimą temperatūrai | pri bivalentnoj temperaturi | |
| S | bei Temperatur an der Betriebsgrenze | alla temperatura limite di funzionamento | vid driftstemperaturens gränsvärde | w granicznej temperaturze roboczej | tõotamise piirtemperatuuri juures | f'temperatura tal-limitu tat-thaddim | при предельной рабочей температуре |
| | à température de fonctionnement limite | σε θερμοκρασία ορίου λειτουργίας | při teplotě na hranici provozního limitu | pri mejni delovni temperaturi | ag teocht teorann oibriúcháin | toimintarajalämpötilassa | ved temperatur for driftsgrense |
| | bij grens werkingstemperatuur | à temperatura de limite de funcionamiento | pri hraniční prevádzkovej teplotě | при гранична работна температура | ekspluatācijas robežtemperatūrā | çalışma limiti sıcaklığında | При граничній робочій температурі |
| | a temperatura límite de funcionamiento | ved driftsgrænsetemperatur | maximális üzemi hőmésékleten | la temperatura limită de funcționare | esant ribinei veikimo temperatūrai | pri graničnoj radnoj temperaturi | |
| T | Backup-Heizleistung | Capacità di riscaldamento addizionale | Kapacitet för reservvärme | Zaprasowa pojemność grzewcza | Tagavara küttevõimsus | Kapaċità tat-tishin ta' sostenn | Резервная тепловая мощность |
| | Capacité de chauffage d'appoint | Δυνατότητα εφεδρικής θέρμανσης | Kapacita záložního vytápění | Rezervna zmogljivost ogrevanja | Toileadh téimh chúltaca | Varalämmitysteho | Sikkerhetskapasitet for oppvarming |
| | Reserveverwarmingcapaciteit | Capacidade de aquecimento de reserva | Výkon záložného vykurovacieho telesa | Мощност на спомогателно електрическо подгряване | Rezerves sildītāja jauda | Yedek ısıtma kapasitesi | Резервна теплова потужність |
| | Capacidad de calefacción auxiliar | Reservevermekapacitet | Kisegítő fűtési teljesítmény | Capacitate de încălzire de siguranță | Pagalbinio šildymo pajėgumas | Kapacitet rezervnog grijanja | |

PRODUCT INFORMATION (*)

| | | |
|--------------------------|---------------|---------------|
| PACKAGED AIR CONDITIONER | INDOOR MODEL | PEAD-RP35JALQ |
| | OUTDOOR MODEL | SUZ-KA35VA6 |

| | |
|--------------------------------|---|
| Function (indicate if present) | |
| cooling | Y |
| heating | Y |

| | |
|---|---|
| If function includes heating: Indicate the heating season the information relates to. Indicated values should relate to one heating season at a time. Include at least the heating season | |
| Average (mandatory) | Y |
| Warmer (if designated) | N |
| Colder (if designated) | N |

| Item | symbol | value | unit |
|--------------------|----------|-------|------|
| Design load | | | |
| cooling | Pdesignc | 3.6 | kW |
| heating/Average | Pdesignh | 2.8 | kW |
| heating/Warmer | Pdesignh | x | kW |
| heating/Colder | Pdesignh | x | kW |

| Item | symbol | value | unit |
|----------------------------|--------|-------|------|
| Seasonal efficiency | | | |
| cooling | SEER | 5.9 | - |
| heating/Average | SCOP/A | 4.0 | - |
| heating/Warmer | SCOP/W | x | - |
| heating/Colder | SCOP/C | x | - |

| | | | |
|---|-----|-----|----|
| Declared capacity for cooling, at indoor temperature 27(19)°C and outdoor temperature Tj | | | |
| Tj=35°C | Pdc | 3.6 | kW |
| Tj=30°C | Pdc | 2.7 | kW |
| Tj=25°C | Pdc | 1.8 | kW |
| Tj=20°C | Pdc | 1.9 | kW |

| | | | |
|--|------|------|---|
| Declared energy efficiency ratio, at indoor temperature 27(19)°C and outdoor temperature Tj | | | |
| Tj=35°C | EERd | 3.4 | - |
| Tj=30°C | EERd | 5.0 | - |
| Tj=25°C | EERd | 7.9 | - |
| Tj=20°C | EERd | 10.2 | - |

| | | | |
|--|-----|-----|----|
| Declared capacity for heating/Average season, at indoor temperature 20°C and outdoor temperature Tj | | | |
| Tj=-7°C | Pdh | 2.5 | kW |
| Tj=2°C | Pdh | 1.6 | kW |
| Tj=7°C | Pdh | 1.7 | kW |
| Tj=12°C | Pdh | 2.1 | kW |
| Tj=bivalent temperature | Pdh | 2.5 | kW |
| Tj=operating limit | Pdh | 2.5 | kW |

| | | | |
|--|------|-----|---|
| Declared coefficient of performance/Average season, at indoor temperature 20°C and outdoor temperature Tj | | | |
| Tj=-7°C | COPd | 3.0 | - |
| Tj=2°C | COPd | 4.0 | - |
| Tj=7°C | COPd | 5.3 | - |
| Tj=12°C | COPd | 6.8 | - |
| Tj=bivalent temperature | COPd | 3.0 | - |
| Tj=operating limit | COPd | 2.3 | - |

| | | | |
|---|-----|---|----|
| Declared capacity for heating/Warmer season, at indoor temperature 20°C and outdoor temperature Tj | | | |
| Tj=2°C | Pdh | x | kW |
| Tj=7°C | Pdh | x | kW |
| Tj=12°C | Pdh | x | kW |
| Tj=bivalent temperature | Pdh | x | kW |
| Tj=operating limit | Pdh | x | kW |

| | | | |
|---|------|---|---|
| Declared coefficient of performance/Warmer season, at indoor temperature 20°C and outdoor temperature Tj | | | |
| Tj=2°C | COPd | x | - |
| Tj=7°C | COPd | x | - |
| Tj=12°C | COPd | x | - |
| Tj=bivalent temperature | COPd | x | - |
| Tj=operating limit | COPd | x | - |

| | | | |
|---|-----|---|----|
| Declared capacity for heating/Colder season, at indoor temperature 20°C and outdoor temperature Tj | | | |
| Tj=-7°C | Pdh | x | kW |
| Tj=2°C | Pdh | x | kW |
| Tj=7°C | Pdh | x | kW |
| Tj=12°C | Pdh | x | kW |
| Tj=bivalent temperature | Pdh | x | kW |
| Tj=operating limit | Pdh | x | kW |
| Tj=-15°C | Pdh | x | kW |

| | | | |
|---|------|---|---|
| Declared coefficient of performance/Colder season, at indoor temperature 20°C and outdoor temperature Tj | | | |
| Tj=-7°C | COPd | x | - |
| Tj=2°C | COPd | x | - |
| Tj=7°C | COPd | x | - |
| Tj=12°C | COPd | x | - |
| Tj=bivalent temperature | COPd | x | - |
| Tj=operating limit | COPd | x | - |
| Tj=-15°C | COPd | x | - |

| | | | |
|-----------------------------|------|----|----|
| Bivalent temperature | | | |
| heating/Average | Tbiv | -7 | °C |
| heating/Warmer | Tbiv | x | °C |
| heating/Colder | Tbiv | x | °C |

| | | | |
|------------------------------------|-----|-----|----|
| Operating limit temperature | | | |
| heating/Average | Tol | -10 | °C |
| heating/Warmer | Tol | x | °C |
| heating/Colder | Tol | x | °C |

| | | | |
|----------------------------------|-------|------|----|
| Cycling interval capacity | | | |
| for cooling | Pcycc | x | kW |
| for heating | Pcyh | x | kW |
| Degradation co-efficient cooling | Cdc | 0.25 | - |

| | | | |
|------------------------------------|--------|------|---|
| Cycling interval efficiency | | | |
| for cooling | EERcyc | x | - |
| for heating | COPcyc | x | - |
| Degradation co-efficient heating | Cdh | 0.25 | - |

| | | | |
|---|----------|----|---|
| Electric power input in power modes other than 'active mode' | | | |
| off mode | POFF | 6 | W |
| standby mode | PSB | 6 | W |
| thermostat - off mode | PTO(c/h) | 40 | W |
| crankcase heater mode | PCK | 0 | W |

| | | | |
|---------------------------------------|-----|-----|-------|
| Annual electricity consumption | | | |
| cooling | QCE | 213 | kWh/a |
| heating/Average | QHE | 980 | kWh/a |
| heating/Warmer | QHE | x | kWh/a |
| heating/Colder | QHE | x | kWh/a |

| Capacity control (indicate one of three options) | |
|--|---|
| fixed | N |
| staged | N |
| variable | Y |

| Other items | | | |
|------------------------------------|-----|----------|----------------------|
| Sound power level (indoor/outdoor) | LWA | 52/62 | dB(A) |
| Global warming potential | GWP | 1975 | kgCO ₂ eq |
| Rated air flow (indoor/outdoor) | - | 840/2178 | m ³ /h |

| | |
|--|---|
| Contact details for obtaining more information | Name and address of the manufacturer or of its authorized representative. |
|--|---|

(* This information is based on the "product information requirement" in COMMISSION REGULATION (EU) No206/2012.

| |
|------------------------------------|
| TECHNICAL DOCUMENTATION (1) |
|------------------------------------|

| | | | |
|--------------------------|---------------|---------------|-------------------|
| PACKAGED AIR CONDITIONER | INDOOR MODEL | PEAD-RP35JALQ | 250H900W732D (mm) |
| | OUTDOOR MODEL | SUZ-KA35VA6 | 550H800W285D (mm) |

| Function | |
|----------|---|
| cooling | Y |
| heating | Y |


| The heating season | |
|------------------------|---|
| Average (mandatory) | Y |
| Warmer (if designated) | N |
| Colder (if designated) | N |

| Capacity control | |
|------------------|---|
| fixed | N |
| staged | N |
| variable | Y |

| Item | symbol | value | unit |
|-------------------------|--------|-------|------|
| Seasonal efficiency (2) | | | |
| cooling | SEER | 5.9 | - |
| heating/Average | SCOP/A | 4.0 | - |
| heating/Warmer | SCOP/W | x | - |
| heating/Colder | SCOP/C | x | - |

| Energy efficiency class | | | |
|-------------------------|--------|----|---|
| cooling | SEER | A+ | - |
| heating/Average | SCOP/A | A+ | - |
| heating/Warmer | SCOP/W | x | - |
| heating/Colder | SCOP/C | x | - |

| Other items | | | |
|------------------------------------|-----|-------|----------|
| Sound power level (indoor/outdoor) | LWA | 52/62 | dB(A) |
| Refrigerant | - | R410A | - |
| Global warming potential | GWP | 1975 | kgCO2eq. |

| | |
|---|--|
| identification and signature of the person empowered to bind the supplier |  <hr style="width: 50%; margin: 0 auto;"/> Akira Hidaka Department Manager, Quality Assurance Department MITSUBISHI ELECTRIC CONSUMER PRODUCTS (THAILAND) CO.,LTD |
|---|--|

(1) This information is based on COMMISSION DELEGATED REGULATION (EU)No626/2011.

(2) SEER/SCOP values are measured based on FprEN 14825:2011: Testing and rating at part load conditions and calculation of seasonal performanc