



ENERG

енергия · ενεργεια



Model Indoor unit
Outdoor unit

SLZ-M35FA
SUZ-KA35VA6

SEER



A++

A+

A

B

C

D

E

A++

kW 3,5

SEER 6,5

kWh/yil 188

SCOP



A++

A+

A

B

C

D

E

A+

kW X 2,6 X

SCOP X 4,3 X


kWh/yil X 845 X



51dB



62dB

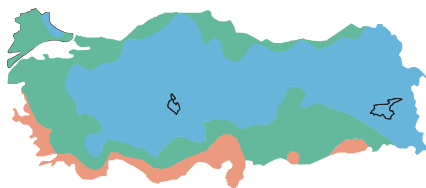

ENERJİ · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ · ENERGIJA · ENERGY · ENERGIE · ENERGI

626/2011



A	Model	B	Indoor unit	SLZ-M25FA	SLZ-M35FA	SLZ-M50FA	SLZ-M60FA			
		C	Outdoor unit	SUZ-KA25VA6	SUZ-KA35VA6	SUZ-KA50VA6	SUZ-KA60VA6			
D	Sound power levels on cooling mode	E	Inside	48	51	56	60			
		F	Out-side	58	62	65	65			
G	Refrigerant	R410A GWP 1975 *1								
H	Cooling	SEER		6,3	6,5	6,3	6,2			
		J	Energy efficiency class	A++	A++	A++	A++			
		K	Annual electricity consumption *2 kWh/a	144	188	256	316			
		L	Design load kW	2,6	3,5	4,6	5,6			
M	Heating (Average season)	SCOP		4,3	4,3	4,3	4,1			
		J	Energy efficiency class	A+	A+	A+	A+			
		K	Annual electricity consumption *2 kWh/a	716	845	1172	1572			
		L	Design load kW	2,2	2,6	3,6	4,6			
		N	Declared capacity	P	at reference design temperature	kW	2,0 (-10°C)	2,3 (-10°C)	3,2 (-10°C)	4,0 (-10°C)
				Q	at bivalent temperature	kW	2,0 (-7°C)	2,3 (-7°C)	3,2 (-7°C)	4,0 (-7°C)
				R	at operation limit temperature	kW	2,0 (-10°C)	2,3 (-10°C)	3,2 (-10°C)	4,0 (-10°C)
		T	Back up heating capacity	kW	0,2	0,3	0,4	0,6		

	Deutsch	Italiano	Svenska	Polski	Eesti	Malti	Русский
A	Modell	Modello	Modell	Model	Mudel	Mudell	Модель
B	Innengerät	Unità interna	Inomhusenhet	Jednostka wewnętrzna	Siseseade	Unità għal ġewwa	Внутренний прибор
C	Außengerät	Unità esterna	Utomhusenhet	Jednostka zewnętrzna	Välisseade	Unità għal barra	Наружный прибор
D	Schallleistungspegel im Kühlmodus	Livelli di potenza sonora in modalità di raffreddamento	Bullernivå i nedkylningsläget	Poziom mocy dźwięku w trybie chłodzenia	Müراتасеmеd jahutusrežiimis	Livelli tal-qawwa tal-ħsejjes fil-modalità tat-kessih	Значения уровня звуковой мощности в режиме охлаждения
E	À l'intérieur	Εσωτερικό	Uvnitř	Znotraj	Laistigh	Sisäpuoli	Innwendig
F	À l'extérieur	Εξωτερικό	Utsida	Na zewnątrz	Väljas	Barra	Sнаружи
G	Réfrigérant	Refrigerante	Köldmedel	Czynnik chłodniczy	Külmutusagens	Refrigerant	Хладагент

	Deutsch	Italiano	Svenska	Polski	Eesti	Malti	Русский
H	Kühlen	Raffreddamento	Kyla	Chłodzenie	Jahutus	Tkessih	Охлаждение
I	Energieeffizienzklasse	Classe di efficienza energetica	Energiklass	Klasa energetyczna	Energiatõhususe klass	Klassi tal-effiċjenza fl-użu tal-enerġija	Класс эффективности использования энергии
J	Jahresstromverbrauch *2	Consumo annuale di energia elettrica *2	Årlig strömförbrukning *2	Zużycie prądu w skali roku *2	Aastane voolutarbimus *2	Konsum annwali tal-elettriku *2	Годовое потребление электроэнергии *2
K	Chargе de calcul	Carico nominale	Dimensionerande belastning	Maksymalne obciążenie	Projektteeritud koormus	Tagħbija tad-disinn	Расчетная нагрузка
L	Heizen (Jahresdurchschnitt / wärmeres Wetter)	Riscaldamento (Stagione media / calda)	Värme (Genomsnittlig/varmare årstid)	Ogrzewanie (Sezon umiarkowany/ciepły)	Kütmine (keskmise/soojaperiood)	Tishin (Staġun Medju / Aktar Shun)	Нагрев (средний/теплый сезон)
M	Nennkapazität	Capacità dichiarata	Deklarerad kapacitet	Deklarowana pojemność	Deklareeritud võimsus	Kapaċità ddiċjarata	Гарантированная мощность
N	bei angegebener Referenztemperatur	alla temperatura di progetto di riferimento	vid dimensionerande referenstemperatur	w znamionowej temperaturze odniesienia	projekteerimise võrdlustemperatuur juures	f'temperatura tad-disinn ta' referenza	при эталонной расчетной температуре
O	à la température de calcul de référence	σε θερμοκρασία σχεδιασμού αναφοράς	při referenční výpočtové teplotě	ob referenční nazivní temperaturi	ag teocht deartha tagartha	perusmitoitulämpötilassa	ved referansetemperatur for utforming
P	bij referentiewerkingtemperatuur	à temperatura nominal de referència	při referenční výpočtové teplotě	при изчислителна проектна температура	aprežina referents temperatūra	referans tasarim sıcaklığında	При эталонной розрахунковий температурі
Q	bei bivalenter Temperatur	alla temperatura bivalente	vid bivalent temperatur	bivalentne temperaturze	bivalentne temperatuuri juures	f'temperatura bivalenti	при бивалентной температуре
R	à température bivalente	σε θερμοκρασία δίσθενους λειτουργίας	při bivalentní teplotě	при бивалентной температуре	ag teocht dhéfhúsach	kaksiarvoisessa lämpötilassa	ved bivalent temperatur
S	bei Temperatur an der Betriebsgrenze	alla temperatura limite di funzionamento	vid driftstemperaturens gränsvärde	w granicznej temperaturze roboczej	töötamise piirtemperatuur juures	f'temperatura tal-limitu tad-thaddim	при предельной рабочей температуре
T	Backup-Heizleistung	Capacità di riscaldamento addizionale	Kapacitet för reservvärme	Zaprasowa pojemność grzewcza	Tagavara küttevõimsus	Kapaċità tad-tishin ta' sostenn	Резервная тепловая мощность

PRODUCT INFORMATION (*)

PACKAGED AIR CONDITIONER	INDOOR MODEL	SLZ-M35FA
	OUTDOOR MODEL	SUZ-KA35VA6

Function (indicate if present)	
cooling	Y
heating	Y

If function includes heating: Indicate the heating season the information relates to. Indicated values should relate to one heating season at a time. Include at least the heating season	
Average (mandatory)	Y
Warmer (if designated)	N
Colder (if designated)	N

Item	symbol	value	unit
Design load			
cooling	Pdesignc	3.5	kW
heating/Average	Pdesignh	2.6	kW
heating/Warmer	Pdesignh	x	kW
heating/Colder	Pdesignh	x	kW

Item	symbol	value	unit
Seasonal efficiency			
cooling	SEER	6.5	-
heating/Average	SCOP/A	4.3	-
heating/Warmer	SCOP/W	x	-
heating/Colder	SCOP/C	x	-

Declared capacity for cooling, at indoor temperature 27(19)°C and outdoor temperature Tj			
Tj=35°C	Pdc	3.5	kW
Tj=30°C	Pdc	2.6	kW
Tj=25°C	Pdc	1.7	kW
Tj=20°C	Pdc	1.4	kW

Declared energy efficiency ratio, at indoor temperature 27(19)°C and outdoor temperature Tj			
Tj=35°C	EERd	3.6	-
Tj=30°C	EERd	5.1	-
Tj=25°C	EERd	8.2	-
Tj=20°C	EERd	11.8	-

Declared capacity for heating/Average season, at indoor temperature 20°C and outdoor temperature Tj			
Tj=-7°C	Pdh	2.3	kW
Tj=2°C	Pdh	1.4	kW
Tj=7°C	Pdh	1.6	kW
Tj=12°C	Pdh	1.9	kW
Tj=bivalent temperature	Pdh	2.3	kW
Tj=operating limit	Pdh	2.3	kW

Declared coefficient of performance/Average season, at indoor temperature 20°C and outdoor temperature Tj			
Tj=-7°C	COPd	3.0	-
Tj=2°C	COPd	4.4	-
Tj=7°C	COPd	5.7	-
Tj=12°C	COPd	6.8	-
Tj=bivalent temperature	COPd	3.0	-
Tj=operating limit	COPd	3.0	-

Declared capacity for heating/Warmer season, at indoor temperature 20°C and outdoor temperature Tj			
Tj=2°C	Pdh	x	kW
Tj=7°C	Pdh	x	kW
Tj=12°C	Pdh	x	kW
Tj=bivalent temperature	Pdh	x	kW
Tj=operating limit	Pdh	x	kW

Declared coefficient of performance/Warmer season, at indoor temperature 20°C and outdoor temperature Tj			
Tj=2°C	COPd	x	-
Tj=7°C	COPd	x	-
Tj=12°C	COPd	x	-
Tj=bivalent temperature	COPd	x	-
Tj=operating limit	COPd	x	-

Declared capacity for heating/Colder season, at indoor temperature 20°C and outdoor temperature Tj			
Tj=-7°C	Pdh	x	kW
Tj=2°C	Pdh	x	kW
Tj=7°C	Pdh	x	kW
Tj=12°C	Pdh	x	kW
Tj=bivalent temperature	Pdh	x	kW
Tj=operating limit	Pdh	x	kW
Tj=-15°C	Pdh	x	kW

Declared coefficient of performance/Colder season, at indoor temperature 20°C and outdoor temperature Tj			
Tj=-7°C	COPd	x	-
Tj=2°C	COPd	x	-
Tj=7°C	COPd	x	-
Tj=12°C	COPd	x	-
Tj=bivalent temperature	COPd	x	-
Tj=operating limit	COPd	x	-
Tj=-15°C	COPd	x	-

Bivalent temperature			
heating/Average	Tbiv	-7	°C
heating/Warmer	Tbiv	x	°C
heating/Colder	Tbiv	x	°C

Operating limit temperature			
heating/Average	Tol	-10	°C
heating/Warmer	Tol	x	°C
heating/Colder	Tol	x	°C

Cycling interval capacity			
for cooling	Pcycc	x	kW
for heating	Pcyh	x	kW
Degradation co-efficient cooling	Cdc	0.25	-

Cycling interval efficiency			
for cooling	EERcyc	x	-
for heating	COPcyc	x	-
Degradation co-efficient heating	Cdh	0.25	-

Electric power input in power modes other than 'active mode'			
off mode	POFF	6	W
standby mode	PSB	6	W
thermostat - off mode	PTO(c/h)	5/5	W
crankcase heater mode	PCK	0	W

Annual electricity consumption			
cooling	QCE	188	kWh/a
heating/Average	QHE	845	kWh/a
heating/Warmer	QHE	x	kWh/a
heating/Colder	QHE	x	kWh/a

Capacity control (indicate one of three options)	
fixed	N
staged	N
variable	Y

Other items			
Sound power level (indoor/outdoor)	LWA	51/62	dB(A)
Global warming potential	GWP	1975	kgCO ₂ eq.
Rated air flow (indoor/outdoor)	-	660/2178	m ³ /h

Contact details for obtaining more information	Name and address of the manufacturer or of its authorized representative.
--	---

(*) This information is based on the "product information requirement" in COMMISSION REGULATION (EU) No206/2012.

TECHNICAL DOCUMENTATION (1)			
-----------------------------	--	--	--

PACKAGED AIR CONDITIONER	INDOOR MODEL	SLZ-M35FA	245H570W570D (mm)
	OUTDOOR MODEL	SUZ-KA35VA6	550H800W285D (mm)

Function	
cooling	Y
heating	Y


The heating season	
Average (mandatory)	Y
Warmer (if designated)	N
Colder (if designated)	N

Capacity control	
fixed	N
staged	N
variable	Y

Item	symbol	value	unit
Seasonal efficiency (2)			
cooling	SEER	6.5	-
heating/Average	SCOP/A	4.3	-
heating/Warmer	SCOP/W	x	-
heating/Colder	SCOP/C	x	-

Energy efficiency class			
cooling	SEER	A++	-
heating/Average	SCOP/A	A+	-
heating/Warmer	SCOP/W	x	-
heating/Colder	SCOP/C	x	-

Other items			
Sound power level (indoor/outdoor)	LWA	51/62	dB(A)
Refrigerant	-	R410A	-
Global warming potential	GWP	1975	kgCO ₂ eq.

identification and signature of the person empowered to bind the supplier			
	Akira Hidaka Department Manager, Quality Assurance Department MITSUBISHI ELECTRIC CONSUMER PRODUCTS (THAILAND) CO.,LTD		

(1) This information is based on COMMISSION DELEGATED REGULATION (EU)No626/2011.

(2) SEER/SCOP values are measured based on FprEN 14825:2011: Testing and rating at part load conditions and calculation of seasonal performance.