




ENERG

енергия · ενέργεια



Model Indoor unit PEAD-RP100JALQ
Outdoor unit PUHZ-SHW112YHA-BS

SEER

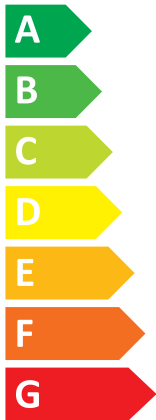


B

kW 10,0

SEER 4,9

kWh/annum 714

SCOP

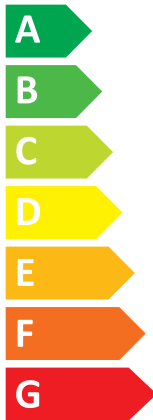

A

kW X 12,7 X

SCOP X 3,8 X

kWh/annum X 4664 X



63dB



69dB



ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ · ENERGIJA · ENERGY · ENERGIE · ENERGI

626/2011

Model	Indoor unit		PEAD-RP100JALQ		
	Outdoor Unit		PUHZ-SHW112VHA(-BS)	PUHZ-SHW112YHA(-BS)	
Sound power levels on cooling mode	Inside	dB	63	63	
	Outside	dB	69	69	
Refrigerant R410A GWP 1975 *1					
Cooling	SEER		4.9	4.9	
	Energy efficiency class		B	B	
	Annual electricity consumption *2 kWh/a		714	714	
	Design load kW		10	10	
Heating (Average season)	SCOP		3.8	3.8	
	Energy efficiency class		A	A	
	Annual electricity consumption *2 kWh/a		4664	4664	
	Design load kW		12.7	12.7	
	De-cared capacity	at reference design temperature	kW	11.2 (-10°C)	11.2 (-10°C)
		at bivalent temperature	kW	11.2 (-7°C)	11.2 (-7°C)
		at operation limit temperature	kW	9.4 (-25°C)	9.4 (-25°C)
	Back up heating capacity		kW	1.5	1.5

	Deutsch	Italiano	Svenska	Polski	Eesti	Malti	Русский
A	Modell	Modello	Modell	Model	Mudel	Mudell	Модель
B	Innengerät	Unità interna	Inomhusenhet	Jednostka wewnętrzna	Siseseade	Unità għal ġewwa	Внутренний прибор
C	Außengerät	Unità esterna	Utomhusenhet	Jednostka zewnętrzna	Välisseade	Unità għal barra	Наружный прибор
D	Schalleistungspegel im Kühlmodus	Livelli di potenza sonora in modalità di raffreddamento	Bullernivå i nedkylningsläget	Poziom mocy dźwięku w trybie chłodzenia	Müratasemed jahutusrežimimis	Livelli tal-qawwa tal-hsejjes fil-modalità tat-tkessih	Значения уровня звуковой мощности в режиме охлаждения
E	Innen	Interno	Insida	Wewnařtz	Sees	Ġewwa	Внутри
F	Außen	Esterno	Utsida	Na zewnařtz	Väljas	Barra	Снаружи
G	Kühlmittel	Refrigerante	Köldmedel	Czynnik chłodniczy	Külmutusagens	Refrigerant	Хладагент

	Deutsch	Italiano	Svenska	Polski	Eesti	Malti	Русский
H	Kühlen	Raffreddamento	Kyla	Chłodzenie	Jahutus	Tkessih	Охлаждение
I	Energieeffizienzklasse	Classe di efficienza energetica	Energiklass	Klasa energetyczna	Energiatõhusususe klass	Klassi tal-effiċjenza fi-użu tal-enerġija	Класс эффективности использования энергии
J	Jahresstromverbrauch *2	Consumo annuale di energia elettrica *2	Årlig strömförbrukning *2	Zużycie prądu w skali roku *2	Aastane voolutarbimus *2	Konsum annwali tal-elettriku *2	Годовое потребление электроэнергии *2
K	Charge de calcul	Carico nominale	Dimensionerande belastning	Maksymalne obciążenie	Projekteeritud koormus	Tagħbija tad-disinn	Расчетная нагрузка
L	Chauffage (moyenne saison)	Riscaldamento (stagione media)	Värme (genomsnittlig årstid)	Ogrzewanie (średnie temperatury)	Kütmine (keskmise hooaeg)	Tiħin (Staġun medju)	Нагрев (средний сезон)
M	Capacità dichiarata	Capacità dichiarata	Deklarerad kapacitet	Deklarowana pojemność	Deklaratorius võimsus	Kapaċità ddikjarata	Гарантированная мощность
N	Capacità dichiarata	Capacità dichiarata	Deklarerad kapacitet	Deklarowana pojemność	Deklaratorius võimsus	Kapaċità ddikjarata	Гарантированная мощность
O	bei angegebener Referenztemperatur	alla temperatura di progetto di riferimento	vid dimensionerande referenttemperatur	w znamionowej temperaturze odniesienia	projekteerimise võrdlustemperatuur juures	f'temperatura tad-disinn ta' referenza	при эталонной расчетной температуре
P	à la température de calcul de référence	se temperatura nominal de referència	pri referenčni výpočtové teplotě	ob referenčni nazivni temperaturi	ag teocht deartha tagartha	perusmitoituislampõtilassa	ved referansetemperatur for utforming
Q	bij referentietemperatuur	à temperatura nominal de referència	pri referenčnéj výpočtovej teplotě	при изчислительна проектна температура	aprëķina references temperaturä	referans tasarim sıcaklıđında	
R	a temperatura de diseño de referencia	ved brugsafhængig referencetemperatur	tervezési referenci-hömsékleten	la temperatura de referință nominală	esant norminei projektinei temperaturä	pri referentnoy temperaturi	
S	bei bivalenter Temperatur	alla temperatura bivalente	vid bivalent temperatur	w temperaturze bivalentnej	bivalentse temperatuur juures	f'temperatura bivalenti	при бивалентной температуре
T	à température bivalente	se θερμοκρασία δισθενούς λειτουργίας	pri bivalentní teplotě	pri bivalentni temperaturi	ag teocht dhëfhiusach	kaksiarvoisessa lämpötilassa	ved bivalent temperatur
U	bij bivalente temperatuur	à temperatura bivalente	pri bivalentnej teplotě	при бивалентна температура	bivalentä temperatü	iki deđerli sıcaklıkta	
V	a temperatura bivalente	ved bivalent temperatur	bivalens hömsékleten	la temperatura de bivalentä	esant perëjimo i djepo šildymo režimä temperaturai	pri bivalentnoy temperaturi	
W	bei Temperatur an der Betriebsgrenze	alla temperatura limite di funzionamento	vid driftstemperatures gränsvärde	w granicznej temperaturze roboczej	tõõtamise piirtemperatuur juures	f'temperatura tal-limitu tad-thaddim	при предельной рабочей температуре
X	à température de fonctionnement limite	se θερμοκρασία ορίου λειτουργίας	pri teplotě na hranici provozního limitu	pri mejni delovni temperaturi	ag teocht teorann oiðriúcháin	toimintarajalämpötilassa	ved temperatur for driftsgrense
Y	bij grens werkingstemperatuur	à temperatura de limite de funcionamiento	pri hraničnej prevádzkovej teplotě	при гранична работна температура	ekspluatācijas robežtemperatü	çalışma limiti sıcaklıđında	
Z	a temperatura límite de funcionamiento	ved driftsgrensetemperatur	maximális üzemi hőmérsékleten	la temperatura limită de funcționare	esant ribinei veikimo temperatürai	pri graničnoy radnoy temperaturi	
AA	Backup-Heizleistung	Capacità di riscaldamento addizionale	Kapacitet för reservvärme	Zapasowa pojemność grzewcza	Tagavara küttevõimsus	Kapaċità tad-tiħin ta' sostenn	Резервная тепловая мощность
AB	Capacité de chauffage d'appoint	Δυνατότητα εφεδρικής θέρμανσης	Kapacita záložního vytápění	Rezerwna zmoęliwost ogrzewania	Toilleadh téimh chùltaca	Varalämmitysteho	Sikkerhetskapasitet for oppvarming
AC	Reserveverwärmingscapaciteit	Capacidade de aquecimento de reserva	Výkon záložního vykurovacieho telesa	Мощност на спомагателно електрическо подгряване	Rezerves šilditāja jauda	Yedek ısıtma kapasitesi	
AD	Capacidad de calefacción auxiliar	Reservevarmekapacitet	Kisegítő fűtési teljesítmény	Saracitate de încălzire de siguranță	Pagalbinio šildymo pajëgumas	Kapacitet rezervnog grijanja	

PRODUCT INFORMATION (*)

PACKAGED AIR CONDITIONER	INDOOR MODEL	PEAD-RP100JALQ
	OUTDOOR MODEL	PUHZ-SHW112YHA(-BS)

Function (indicate if present)	
cooling	Y
heating	Y

If function includes heating: Indicate the heating season the information relates to. Indicated values should relate to one heating season at a time. Include at least the heating season	
Average (mandatory)	Y
Warmer (if designated)	N
Colder (if designated)	N

Item	symbol	value	unit
Design load			
cooling	Pdesignc	10.0	kW
heating/Average	Pdesignh	12.7	kW
heating/Warmer	Pdesignh	x	kW
heating/Colder	Pdesignh	x	kW

Item	symbol	value	unit
Seasonal efficiency			
cooling	SEER	4.9	-
heating/Average	SCOP/A	3.8	-
heating/Warmer	SCOP/W	x	-
heating/Colder	SCOP/C	x	-

Declared capacity for cooling, at indoor temperature 27(19)°C and outdoor temperature Tj			
Tj=35°C	Pdc	10.0	kW
Tj=30°C	Pdc	7.3	kW
Tj=25°C	Pdc	5.4	kW
Tj=20°C	Pdc	5.6	kW

Declared energy efficiency ratio, at indoor temperature 27(19)°C and outdoor temperature Tj			
Tj=35°C	EERd	3.4	-
Tj=30°C	EERd	4.7	-
Tj=25°C	EERd	6.3	-
Tj=20°C	EERd	7.9	-

Declared capacity for heating/Average season, at indoor temperature 20°C and outdoor temperature Ti			
Tj=-7°C	Pdh	11.2	kW
Tj=2°C	Pdh	6.8	kW
Tj=7°C	Pdh	4.4	kW
Tj=12°C	Pdh	5.1	kW
Tj=bivalent temperature	Pdh	11.2	kW
Tj=operating limit	Pdh	9.4	kW

Declared coefficient of performance/Average season, at indoor temperature 20°C and outdoor temperature Ti			
Tj=-7°C	COPd	2.7	-
Tj=2°C	COPd	3.7	-
Tj=7°C	COPd	4.9	-
Tj=12°C	COPd	5.7	-
Tj=bivalent temperature	COPd	2.7	-
Tj=operating limit	COPd	1.5	-

Declared capacity for heating/Warmer season, at indoor temperature 20°C and outdoor temperature Tj			
Tj=2°C	Pdh	x	kW
Tj=7°C	Pdh	x	kW
Tj=12°C	Pdh	x	kW
Tj=bivalent temperature	Pdh	x	kW
Tj=operating limit	Pdh	x	kW

Declared coefficient of performance/Warmer season, at indoor temperature 20°C and outdoor temperature Tj			
Tj=2°C	COPd	x	-
Tj=7°C	COPd	x	-
Tj=12°C	COPd	x	-
Tj=bivalent temperature	COPd	x	-
Tj=operating limit	COPd	x	-

Declared capacity for heating/Colder season, at indoor temperature 20°C and outdoor temperature Ti			
Tj=-7°C	Pdh	x	kW
Tj=2°C	Pdh	x	kW
Tj=7°C	Pdh	x	kW
Tj=12°C	Pdh	x	kW
Tj=bivalent temperature	Pdh	x	kW
Tj=operating limit	Pdh	x	kW
Tj=-15°C	Pdh	x	kW

Declared coefficient of performance/Colder season, at indoor temperature 20°C and outdoor temperature Ti			
Tj=-7°C	COPd	x	-
Tj=2°C	COPd	x	-
Tj=7°C	COPd	x	-
Tj=12°C	COPd	x	-
Tj=bivalent temperature	COPd	x	-
Tj=operating limit	COPd	x	-
Tj=-15°C	COPd	x	-

Bivalent temperature			
heating/Average	Tbiv	-7	°C
heating/Warmer	Tbiv	x	°C
heating/Colder	Tbiv	x	°C

Operating limit temperature			
heating/Average	Tol	-25	°C
heating/Warmer	Tol	x	°C
heating/Colder	Tol	x	°C

Cycling interval capacity			
for cooling	Pcycc	x	kW
for heating	Pcych	x	kW
Degradation co-efficient cooling	Cdc	0.25	-

Cycling interval efficiency			
for cooling	EERcyc	x	-
for heating	COPcyc	x	-
Degradation co-efficient heating	Cdh	0.25	-

Electric power input in power modes other than 'active mode'			
off mode	POFF	15	W
standby mode	PSB	15	W
thermostat - off mode	PTO(c/h)	212/74	W
crankcase heater mode	PCK	0	W

Annual electricity consumption			
cooling	QCE	714	kWh/a
heating/Average	QHE	4664	kWh/a
heating/Warmer	QHE	x	kWh/a
heating/Colder	QHE	x	kWh/a

Capacity control (indicate one of three options)			
fixed		N	
staged		N	
variable		Y	

Other items			
Sound power level (indoor/outdoor)	LWA	63/69	dB(A)
Global warming potential	GWP	1975	kgCO2eq
Rated air flow (indoor/outdoor)	-	2520/6000	m3/h

Contact details for obtaining more information	MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS 3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan E-mail: melshierp@nb.MitsubishiElectric.co.jp
--	--

(*) This information is based on the "product information requirement" in COMMISSION REGULATION (EU) No206/2012.

TECHNICAL DOCUMENTATION (1)

PACKAGED AIR CONDITIONER	INDOOR MODEL	PEAD-RP100JALQ	250H1400W732D (mm)
	OUTDOOR MODEL	PUHZ-SHW112YHA(-BS)	1350H950W330D (mm)

Function	
cooling	Y
heating	Y


The heating season	
Average (mandatory)	Y
Warmer (if designated)	N
Colder (if designated)	N

Capacity control	
fixed	N
staged	N
variable	Y

Item	symbol	value	unit
Seasonal efficiency (2)			
cooling	SEER	4.9	-
heating/Average	SCOP/A	3.8	-
heating/Warmer	SCOP/W	x	-
heating/Colder	SCOP/C	x	-

Energy efficiency class			
cooling	SEER	B	-
heating/Average	SCOP/A	A	-
heating/Warmer	SCOP/W	x	-
heating/Colder	SCOP/C	x	-

Other items			
Sound power level (indoor/outdoor)	LWA	63/69	dB(A)
Refrigerant	-	R410A	-
Global warming potential	GWP	1975	kgCO ₂ eq.

identification and signature of the person empowered to bind the supplier	 Hideyo Tamura Manager, Packaged Air Conditioners Quality Control Section MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS
---	---

(1) This information is based on COMMISSION DELEGATED REGULATION (EU)No626/2011.

(2) SEER/SCOP values are measured based on FprEN 14825:2011: Testing and rating at part load conditions and calculation of seasonal performance.