



ENERG
енергия · ενεργεια

Y IJA
IE IA




Indoor unit
Outdoor unit

E*SD-*M2/6/9*D
PXZ-5F85VG



55 °C

35 °C

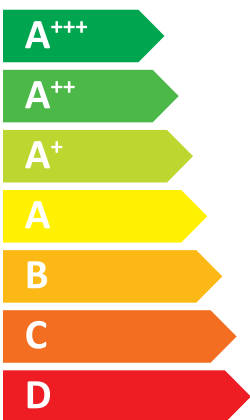

A⁺

A⁺⁺



41 dB



64 dB

■ 05
■ **07**
■ 07
kW

■ 07
■ **07**
■ 08
kW



2019

811/2013

1.SPAC HEATER			For medium-temperature application													For low-temperature application												
1	2	3	6	8	11	9	13	15	16	21	22	17	18	25	4	6	8	11	9	13	15	16	21	22	17	18	25	
Outdoor unit	Indoor unit	Medium-temperature application	Seasonal space heating energy efficiency class	Rated heat output under average climate conditions	Seasonal space heating energy efficiency class	Rated heat output under average climate conditions	Water heating energy efficiency class	Rated heat output under average climate conditions	For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	Low-temperature application	Seasonal space heating energy efficiency class	Rated heat output under average climate conditions	Seasonal space heating energy efficiency class	Rated heat output under average climate conditions	Water heating energy efficiency class	Rated heat output under average climate conditions	For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	
PXZ-5F85VG	EHSD-****D ERSD-****D	✓	A+	7	111	4844	41	5	7	93	159	5331	2342	64	✓	A++	7	157	3515	41	7	8	126	208	5197	1971	64	
		✓	A+	7	111	4844	41	5	7	93	159	5331	2342	64	✓	A++	7	157	3515	41	7	8	126	208	5197	1971	64	

2.COMBINATION HEATER			For medium-temperature application													For low-temperature application																													
1	2	3	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	4	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	
Outdoor unit	Indoor unit	Medium-temperature application	Decided load profile	Seasonal space heating energy efficiency class	Water heating energy efficiency class	Rated heat output under average climate conditions	For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	For water heating, annual energy consumption under average climate conditions	For water heating, annual energy consumption under average climate conditions	Seasonal space heating energy efficiency class	Rated heat output under average climate conditions	Water heating energy efficiency class	Rated heat output under average climate conditions	For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions		
PXZ-5F85VG	EHST17D-****D ERST17D-****D EHST20D-****D ERST20D-****D EHST30D-****D ERST30D-****D	✓	L	A+	A+	7	4844	908	111	121	41	-	5	7	5331	2342	907	839	93	159	122	132	64	✓	L	A++	A+	7	3515	908	157	121	41	-	7	8	5197	1971	907	839	126	208	122	132	64
		✓	L	A+	A+	7	4844	908	111	121	41	-	5	7	5331	2342	907	839	93	159	122	132	64	✓	L	A++	A+	7	3515	908	157	121	41	-	7	8	5197	1971	907	839	126	208	122	132	64
		✓	L	A+	A+	7	4844	927	111	123	41	-	5	7	5331	2342	977	856	93	159	120	134	64	✓	L	A++	A+	7	3515	927	157	123	41	-	7	8	5197	1971	977	856	126	208	120	134	64
		✓	L	A+	A+	7	4844	927	111	123	41	-	5	7	5331	2342	977	856	93	159	120	134	64	✓	L	A++	A+	7	3515	927	157	123	41	-	7	8	5197	1971	977	856	126	208	120	134	64
		✓	XL	A+	A	7	4844	1628	111	110	41	-	5	7	5331	2342	1652	1462	93	159	108	124	64	✓	XL	A++	A	7	3515	1628	157	110	41	-	7	8	5197	1971	1652	1462	126	208	108	124	64
		✓	XL	A+	A	7	4844	1628	111	110	41	-	5	7	5331	2342	1652	1462	93	159	108	124	64	✓	XL	A++	A	7	3515	1628	157	110	41	-	7	8	5197	1971	1652	1462	126	208	108	124	64

English	German	French	Italian	Spanish
Nederlands	Svenska	Данск	Português	Ελληνικά
suomi	Česťina	Български	Polski	Ελλάδα
Outdoor unit	Außeneinheit	unité extérieure	unidad exterior	Εξωτερική μονάδα
Unit	Utomhusenhet	Unités exterieur	unidad exterior	Εξωτερική μονάδα
Ulkokeskus	Vanhoviin yksikkö	Внешний блок	unidad exterior	Εξωτερική μονάδα
Indoor unit	Innenheit	unité intérieure	unidad interior	Εσωτερική μονάδα
Indoor unit	Innenheit	Unités intérieures	unidad interior	Εσωτερική μονάδα
2	Sisäyksikkö	Indoor unit	unidad interior	Εσωτερική μονάδα
Medium-temperature application	Mittelprematuranwendung	Application à moyenne température	aplicación a media temperatura	η εφαρμογή σε μέτρια θερμοκρασία
3	moderate temperature application	Application à moyenne température	aplicación a media temperatura	η εφαρμογή σε μέτρια θερμοκρασία
4	Low-temperature application	Application à basse température	aplicación a baja temperatura	η εφαρμογή σε χαμηλή θερμοκρασία
5	Declared load profile	Profil de charge déclaré	Perfil de carga declarado	η εφαρμογή σε προεπιλεγμένο προφίλ φόρτου
6	Seasonal space heating energy efficiency class	Classe de efficacité énergétique saisonnière	clase de eficiencia energética estacional	η εφαρμογή σε εποχιακή θέρμανση χώρου
7	Water heating energy efficiency class	Classe de efficacité énergétique pour le chauffage de l'eau	clase de eficiencia energética del calentamiento de agua	η εφαρμογή σε θέρμανση νερού
8	Rated heat output under average climate conditions	Capacité énergétique nominale dans les conditions climatiques moyennes	capacidad energética nominal en condiciones climáticas medias	η ισχύς θέρμανσης υπό μέτριες καιρικές συνθήκες
9	For space heating, annual energy consumption under average climate conditions	Consommation annuelle d'énergie pour le chauffage de l'eau, dans les conditions climatiques moyennes	consumo anual de energía (en condiciones climáticas medias)	η ετήσια κατανάλωση ενέργειας υπό μέτριες καιρικές συνθήκες
10	For water heating, annual energy consumption under average climate conditions	Consommation annuelle d'énergie pour le chauffage de l'eau, dans les conditions climatiques moyennes	consumo anual de energía (en condiciones climáticas medias)	η ετήσια κατανάλωση ενέργειας υπό μέτριες καιρικές συνθήκες
11	Seasonal space heating energy efficiency under average climate conditions	Efficacité énergétique saisonnière pour le chauffage de l'eau (dans les conditions climatiques moyennes)	eficiencia energética de calentamiento de agua en condiciones climáticas medias	η ενεργειακή απόδοση της θέρμανσης χώρου υπό μέτριες καιρικές συνθήκες
12	Water heating energy efficiency under average climate conditions	Efficacité énergétique pour le chauffage de l'eau (dans les conditions climatiques moyennes)	eficiencia energética del calentamiento de agua en condiciones climáticas medias	η ενεργειακή απόδοση της θέρμανσης νερού υπό μέτριες καιρικές συνθήκες
13	Sound power level L _{WA,indoor}	Niveau de puissance acoustique L _{WA, à l'intérieur}	nivel de potencia acústica L _{WA, interior}	η στάθμη ηχητικής ισχύος εσωτερικά
14	Work only during off-peak hours	Fonctionne uniquement pendant les heures creuses	funciona solamente durante las horas de baja demanda	κατανάλωση μόνο εκτός των ωρών αιχμής
15	Rated heat output under colder climate conditions	Capacité thermique nominale dans les conditions climatiques plus froides	capacidad térmica nominal en condiciones climáticas más frías	η ισχύς θέρμανσης υπό κρύες καιρικές συνθήκες
16	Rated heat output under warmer climate conditions	Capacité thermique nominale dans les conditions climatiques plus chaudes	capacidad térmica nominal en condiciones climáticas más calidas	η ισχύς θέρμανσης υπό ζεστές καιρικές συνθήκες
17	For space heating, annual energy consumption under warmer climate conditions	Consommation annuelle d'énergie pour le chauffage de l'eau, dans les conditions climatiques plus chaudes	consumo anual de energía en condiciones climáticas más calidas	η ετήσια κατανάλωση ενέργειας υπό ζεστές καιρικές συνθήκες
18	For water heating, annual energy consumption under colder climate conditions	Consommation annuelle d'énergie pour le chauffage de l'eau, dans les conditions climatiques plus froides	consumo anual de energía en condiciones climáticas más frías	η ετήσια κατανάλωση ενέργειας υπό κρύες καιρικές συνθήκες
19	For water heating, annual energy consumption under warmer climate conditions	Consommation annuelle d'énergie pour le chauffage de l'eau, dans les conditions climatiques plus chaudes	consumo anual de energía en condiciones climáticas más calidas	η ετήσια κατανάλωση ενέργειας υπό ζεστές καιρικές συνθήκες
20	For water heating, annual energy consumption under warmer climate conditions	Consommation annuelle d'énergie pour le chauffage de l'eau, dans les conditions climatiques plus chaudes	consumo anual de energía en condiciones climáticas más calidas	η ετήσια κατανάλωση ενέργειας υπό ζεστές καιρικές συνθήκες
21	For water heating, annual energy consumption under warmer climate conditions	Consommation annuelle d'énergie pour le chauffage de l'eau, dans les conditions climatiques plus chaudes	consumo anual de energía en condiciones climáticas más calidas	η ετήσια κατανάλωση ενέργειας υπό ζεστές καιρικές συνθήκες
22	For water heating, annual energy consumption under warmer climate conditions	Consommation annuelle d'énergie pour le chauffage de l'eau, dans les conditions climatiques plus chaudes	consumo anual de energía en condiciones climáticas más calidas	η ετήσια κατανάλωση ενέργειας υπό ζεστές καιρικές συνθήκες
23	For water heating, annual energy consumption under warmer climate conditions	Consommation annuelle d'énergie pour le chauffage de l'eau, dans les conditions climatiques plus chaudes	consumo anual de energía en condiciones climáticas más calidas	η ετήσια κατανάλωση ενέργειας υπό ζεστές καιρικές συνθήκες
24	For water heating, annual energy consumption under warmer climate conditions	Consommation annuelle d'énergie pour le chauffage de l'eau, dans les conditions climatiques plus chaudes	consumo anual de energía en condiciones climáticas más calidas	η ετήσια κατανάλωση ενέργειας υπό ζεστές καιρικές συνθήκες
25	For water heating, annual energy consumption under warmer climate conditions	Consommation annuelle d'énergie pour le chauffage de l'eau, dans les conditions climatiques plus chaudes	consumo anual de energía en condiciones climáticas más calidas	η ετήσια κατανάλωση ενέργειας υπό ζεστές καιρικές συνθήκες

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-5F85VG
	Indoor unit:	EHSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.7	kW	Seasonal space heating energy efficiency	η_s	111	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	Pdh	5.9	kW	Tj = -7 °C	COPd	1.40	-
Degradation co-efficient (**)	Cdh	1.00	-	Tj = +2 °C	COPd	3.07	-
Tj = +2 °C	Pdh	3.7	kW	Tj = +7 °C	COPd	3.93	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = +12 °C	COPd	4.48	-
Tj = +7 °C	Pdh	2.4	kW	Tj = bivalent temperature	COPd	1.40	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = operation limit temperature (***)	COPd	1.21	-
Tj = +12 °C	Pdh	2.1	kW	Operation limit temperature	TOL	-20	°C
Degradation co-efficient (**)	Cdh	0.97	-	Heating water operating limit temperature	WTOL	55	°C
Tj = bivalent temperature	Pdh	5.9	kW	Supplementary heater			
Tj = operation limit temperature (***)	Pdh	5.1	kW	Rated heat output (*)	Psup	1.6	kW
Bivalent temperature	Tbiv	-7	°C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	-10	°C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.015	kW				
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	3720	m³/h	
Sound power level, indoors/outdoors	LWA	41 / 64		-			
Annual energy consumption	Q _{HE}	4844		-			

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	-			η_{wh}	-	%	
Daily electricity consumption	Q _{elec}	-					
Annual electricity consumption	AEC	-					

Contact details
 MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS
 3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

The identification and signature of the person empowered to bind the supplier:
 Yasutaka MURAKAMI
 Section Manager, Quality Control Section
 Shizuoka JAPAN

Yasutaka Murakami

* Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.
 * Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.
 (*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
 (**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
 (***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-5F85VG
	Indoor unit:	EHSD-****D
Air-to-water heat pump:	yes	
Water-to-water heat pump:	no	
Brine-to-water heat pump:	no	
Low-temperature heat pump:	no	
Equipped with a supplementary heater:	yes	
Heat pump combination heater:	no	
Parameters for	low-temperature application.	
Parameters for	average climate conditions.	

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.8	kW	Seasonal space heating energy efficiency	η_s	157	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	Pdh	6.0	kW	Tj = -7 °C	COPd	2.80	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = +2 °C	COPd	4.29	-
Tj = +2 °C	Pdh	4.0	kW	Tj = +7 °C	COPd	4.72	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = +12 °C	COPd	4.33	-
Tj = +7 °C	Pdh	2.6	kW	Tj = bivalent temperature	COPd	2.80	-
Degradation co-efficient (**)	Cdh	0.97	-	Tj = operation limit temperature (***)	COPd	2.50	-
Tj = +12 °C	Pdh	2.3	kW	Operation limit temperature	TOL	-20	°C
Degradation co-efficient (**)	Cdh	0.97	-	Heating water operating limit temperature	WTOL	55	°C
Tj = bivalent temperature	Pdh	6.0	kW	Supplementary heater			
Tj = operation limit temperature (***)	Pdh	6.8	kW	Rated heat output (*)	Psup	0.0	kW
Bivalent temperature	Tbiv	-7	°C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	-10	°C	Other items			
Power consumption in modes other than active mode				Rated air flow rate, outdoors			
Off mode	P _{OFF}	0.015	kW			3720	m ³ /h
Thermostat-off mode	P _{TO}	0.015	kW	Sound power level, indoors/outdoors			
Standby mode	P _{SB}	0.015	kW	LWA	41 / 64		
Crankcase heater mode	P _{CK}	0.000	kW	Annual energy consumption			
				Q _{HE}	3515		

Other items				Rated air flow rate, outdoors			
Capacity control	variable					3720	m ³ /h
Sound power level, indoors/outdoors	LWA	41 / 64		Sound power level, indoors/outdoors			
Annual energy consumption	Q _{HE}	3515		Annual energy consumption			

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	-			η_{wh}	-		%
Daily electricity consumption	Q _{elec}	-					
Annual electricity consumption	AEC	-					

Contact details
 MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS
 3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

The identification and signature of the person empowered to bind the supplier;
 Yasutaka MURAKAMI
 Section Manager, Quality Control Section
 Shizuoka JAPAN

The signature is signed in the average climate / medium-temperature section.

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.
 · Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.
 (*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
 (**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
 (***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-5F85VG
	Indoor unit:	EHSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	5.2	kW	Seasonal space heating energy efficiency	η_s	93	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	Pdh	3.2	kW	Tj = -7 °C	COPd	1.91	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = +2 °C	COPd	2.96	-
Tj = +2 °C	Pdh	1.9	kW	Tj = +7 °C	COPd	5.42	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = +12 °C	COPd	6.03	-
Tj = +7 °C	Pdh	2.4	kW	Tj = bivalent temperature	COPd	2.06	-
Degradation co-efficient (**)	Cdh	0.97	-	Tj = operation limit temperature (***)	COPd	1.00	-
Tj = +12 °C	Pdh	2.3	kW	Tj = -15 °C (if TOL < -20 °C)	COPd	1.00	-
Degradation co-efficient (**)	Cdh	0.96	-	Operation limit temperature	TOL	-20	°C
Tj = bivalent temperature	Pdh	3.2	kW	Heating water operating limit temperature	WTOL	55	°C
Tj = operation limit temperature (***)	Pdh	3.8	kW	Supplementary heater			
Tj = -15 °C (if TOL < -20 °C)	Pdh	4.3	kW	Rated heat output (*)	Psup	5.2	kW
Bivalent temperature	Tbiv	-7	°C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	-22	°C	Power consumption in modes other than active mode			
Power consumption in modes other than active mode				Off mode			
Off mode	P _{OFF}	0.015	kW	Thermostat-off mode			
Thermostat-off mode	P _{TO}	0.015	kW	Standby mode			
Standby mode	P _{SB}	0.015	kW	Crankcase heater mode			
Crankcase heater mode	P _{CK}	0.000	kW	Other items			
Other items				Capacity control			
Capacity control	variable			Rated air flow rate, outdoors			
Sound power level, indoors/outdoors	L _{WA}	41 / 64	dBA	-			
Annual energy consumption	Q _{HE}	5331	kWh	3720 m ³ /h			
For heat pump combination heater:				Declared load profile			
Declared load profile	-			Water heating energy efficiency			
Daily electricity consumption	Qelec	-	kWh	η_{wh}			
Annual electricity consumption	AEC	-	kWh	-			

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-			
Sound power level, indoors/outdoors	L _{WA}	41 / 64	dBA	3720 m ³ /h			
Annual energy consumption	Q _{HE}	5331	kWh				

For heat pump combination heater:				Declared load profile			
Declared load profile	-			Water heating energy efficiency			
Daily electricity consumption	Qelec	-	kWh	η_{wh}			
Annual electricity consumption	AEC	-	kWh	-			

Contact details
 MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS
 3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

The identification and signature of the person empowered to bind the supplier;
 Yasutaka MURAKAMI
 Section Manager, Quality Control Section
 Shizuoka JAPAN

The signature is signed in the average climate / medium-temperature section.

* Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.
 * Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.
 (*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
 (**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
 (***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-5F85VG
	Indoor unit:	EHSD-****D
Air-to-water heat pump:	yes	
Water-to-water heat pump:	no	
Brine-to-water heat pump:	no	
Low-temperature heat pump:	no	
Equipped with a supplementary heater:	yes	
Heat pump combination heater:	no	
Parameters for	low-temperature application.	
Parameters for	colder climate conditions.	

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.8	kW	Seasonal space heating energy efficiency	η_s	126	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	Pdh	4.1	kW	Tj = -7 °C	COPd	2.81	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = +2 °C	COPd	3.71	-
Tj = +2 °C	Pdh	2.5	kW	Tj = +7 °C	COPd	6.27	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = +12 °C	COPd	6.54	-
Tj = +7 °C	Pdh	2.6	kW	Tj = bivalent temperature	COPd	2.91	-
Degradation co-efficient (**)	Cdh	0.96	-	Tj = operation limit temperature (***)	COPd	1.73	-
Tj = +12 °C	Pdh	2.3	kW	Tj = -15 °C (if TOL < -20 °C)	COPd	2.13	-
Degradation co-efficient (**)	Cdh	0.96	-	Operation limit temperature	TOL	-20	°C
Tj = bivalent temperature	Pdh	4.1	kW	Heating water operating limit temperature	WTOL	55	°C
Tj = operation limit temperature (***)	Pdh	5.2	kW	Supplementary heater			
Tj = -15 °C (if TOL < -20 °C)	Pdh	5.6	kW	Rated heat output (*)	Psup	6.8	kW
Bivalent temperature	Tbiv	-7	°C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	-22	°C	Other items			
Power consumption in modes other than active mode				Rated air flow rate, outdoors			
Off mode	P _{OFF}	0.015	kW			3720	m ³ /h
Thermostat-off mode	P _{TO}	0.015	kW	Capacity control			
Standby mode	P _{SB}	0.015	kW	variable			
Crankcase heater mode	P _{CK}	0.000	kW	Sound power level, indoors/outdoors	L _{WA}	41 / 64	dBA
				Annual energy consumption	Q _{HE}	5197	kWh

Other items				Rated air flow rate, outdoors			
Capacity control	variable					3720	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 64		Capacity control			
Annual energy consumption	Q _{HE}	5197		variable			

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	-				η_{wh}	-	%
Daily electricity consumption	Q _{elec}	-					
Annual electricity consumption	AEC	-					

Contact details

MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS 3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

The identification and signature of the person empowered to bind the supplier;

Yasutaka MURAKAMI
Section Manager, Quality Control Section
Shizuoka JAPAN

The signature is signed in the average climate / medium-temperature section.

- Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.
 - Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.
- (*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
- (**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
- (***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-5F85VG
	Indoor unit:	EHSD-****D
Air-to-water heat pump:	yes	
Water-to-water heat pump:	no	
Brine-to-water heat pump:	no	
Low-temperature heat pump:	no	
Equipped with a supplementary heater:	yes	
Heat pump combination heater:	no	
Parameters for	medium-temperature application.	
Parameters for	warmer climate conditions.	

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.1	kW	Seasonal space heating energy efficiency	η_s	159	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	-	kW	Tj = - 7 °C	COPd	-	-
Degradation co-efficient (**)	Cdh	-	-	Tj = + 2 °C	COPd	1.84	-
Tj = + 2 °C	Pdh	7.1	kW	Tj = + 7 °C	COPd	3.74	-
Degradation co-efficient (**)	Cdh	1.00	-	Tj = +12 °C	COPd	5.26	-
Tj = + 7 °C	Pdh	4.6	kW	Tj = bivalent temperature	COPd	1.84	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = operation limit temperature (***)	COPd	1.84	-
Tj = +12 °C	Pdh	2.0	kW	Operation limit temperature	TOL	-20	°C
Degradation co-efficient (**)	Cdh	0.96	-	Heating water operating limit temperature	WTOL	55	°C
Tj = bivalent temperature	Pdh	7.1	kW	Supplementary heater			
Tj = operation limit temperature (***)	Pdh	7.1	kW	Rated heat output (*)	Psup	0.0	kW
Bivalent temperature	Tbiv	2	°C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	2	°C	Other items			
Power consumption in modes other than active mode				Rated air flow rate, outdoors			
Off mode	P _{OFF}	0.015	kW			3720	m ³ /h
Thermostat-off mode	P _{TO}	0.015	kW	Sound power level, indoors/outdoors			
Standby mode	P _{SB}	0.015	kW	L _{WA}	41 / 64		
Crankcase heater mode	P _{CK}	0.000	kW	Annual energy consumption			
				Q _{HE}	2342		
				For heat pump combination heater:			
Declared load profile				Water heating energy efficiency			
				η_{wh}	-		
Daily electricity consumption				Q _{elec}	-		
Annual electricity consumption				AEC	-		

Capacity control	variable			Rated air flow rate, outdoors	-	3720	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 64		dBA			
Annual energy consumption	Q _{HE}	2342		kWh			

For heat pump combination heater:							
Declared load profile				Water heating energy efficiency			
				η_{wh}	-		
Daily electricity consumption				Q _{elec}	-		
Annual electricity consumption				AEC	-		

Contact details
 MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS
 3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

The identification and signature of the person empowered to bind the supplier;
 Yasutaka MURAKAMI
 Section Manager, Quality Control Section
 Shizuoka JAPAN

The signature is signed in the average climate / medium-temperature section.

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.
 · Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.
 (*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
 (**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
 (***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-5F85VG
	Indoor unit:	EHSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.8	kW	Seasonal space heating energy efficiency	η_s	208	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	Pdh	-	kW	Tj = -7 °C	COPd	-	-
Degradation co-efficient (**)	Cdh	-	-	Tj = +2 °C	COPd	3.00	-
Tj = +2 °C	Pdh	7.8	kW	Tj = +7 °C	COPd	5.22	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = +12 °C	COPd	6.29	-
Tj = +7 °C	Pdh	5.0	kW	Tj = bivalent temperature	COPd	3.00	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = operation limit temperature (***)	COPd	3.00	-
Tj = +12 °C	Pdh	2.2	kW	Operation limit temperature	TOL	-20	°C
Degradation co-efficient (**)	Cdh	0.96	-	Heating water operating limit temperature	WTOL	55	°C
Tj = bivalent temperature	Pdh	7.8	kW	Supplementary heater			
Tj = operation limit temperature (***)	Pdh	7.8	kW	Rated heat output (*)	Psup	0.0	kW
Bivalent temperature	Tbiv	2	°C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	2	°C	Other items			
Power consumption in modes other than active mode				Rated air flow rate, outdoors			
Off mode	P _{OFF}	0.015	kW			3720	m ³ /h
Thermostat-off mode	P _{TO}	0.015	kW	Sound power level, indoors/outdoors			
Standby mode	P _{SB}	0.015	kW	LWA	41 / 64		
Crankcase heater mode	P _{CK}	0.000	kW		Annual energy consumption		
				Q _{HE}	1971		
				For heat pump combination heater:			
Declared load profile				Water heating energy efficiency			
Daily electricity consumption				η_{wh}	-		
Annual electricity consumption							
				Qelec	-		
				AEC	-		

Other items				Rated air flow rate, outdoors			
Capacity control	variable					3720	m ³ /h
Sound power level, indoors/outdoors	LWA	41 / 64		Sound power level, indoors/outdoors			
Annual energy consumption	Q _{HE}	1971		Annual energy consumption			

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile				η_{wh}	-		
Daily electricity consumption							
Annual electricity consumption							
				Qelec	-		
				AEC	-		

Contact details

MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS 3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

The identification and signature of the person empowered to bind the supplier;

Yasutaka MURAKAMI

The signature is signed in the average climate / medium-temperature section. Section Manager, Quality Control Section

Shizuoka JAPAN

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-5F85VG
	Indoor unit:	ERSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.7	kW	Seasonal space heating energy efficiency	η_s	111	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	Pdh	5.9	kW	Tj = -7 °C	COPd	1.40	-
Degradation co-efficient (**)	Cdh	1.00	-	Tj = +2 °C	COPd	3.07	-
Tj = +2 °C	Pdh	3.7	kW	Tj = +7 °C	COPd	3.93	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = +12 °C	COPd	4.48	-
Tj = +7 °C	Pdh	2.4	kW	Tj = bivalent temperature	COPd	1.40	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = operation limit temperature (***)	COPd	1.21	-
Tj = +12 °C	Pdh	2.1	kW	Operation limit temperature	TOL	-20	°C
Degradation co-efficient (**)	Cdh	0.97	-	Heating water operating limit temperature	WTOL	55	°C
Tj = bivalent temperature	Pdh	5.9	kW	Supplementary heater			
Tj = operation limit temperature (***)	Pdh	5.1	kW	Rated heat output (*)	Psup	1.6	kW
Bivalent temperature	Tbiv	-7	°C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	-10	°C	Other items			
Power consumption in modes other than active mode				Rated air flow rate, outdoors			
Off mode	P _{OFF}	0.015	kW			3720	m ³ /h
Thermostat-off mode	P _{TO}	0.015	kW	Capacity control			
Standby mode	P _{SB}	0.015	kW	variable			
Crankcase heater mode	P _{CK}	0.000	kW	Sound power level, indoors/outdoors			
				L _{WA}			
				41 / 64			
				Annual energy consumption			
				Q _{HE}			
				4844			
				kWh			

Other items				Rated air flow rate, outdoors			
Capacity control	variable					3720	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 64		Capacity control			
Annual energy consumption	Q _{HE}	4844		variable			
				Sound power level, indoors/outdoors			
				L _{WA}			
				41 / 64			
				Annual energy consumption			
				Q _{HE}			
				4844			
				kWh			

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	-			η_{wh}	-		%
Daily electricity consumption	Q _{elec}	-					
Annual electricity consumption	AEC	-					

Contact details

MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS 3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

The identification and signature of the person empowered to bind the supplier:

Yasutaka MURAKAMI
Section Manager, Quality Control Section
Shizuoka JAPAN

Yasutaka Murakami

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.
• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.
(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-5F85VG
	Indoor unit:	ERSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.8	kW	Seasonal space heating energy efficiency	η_s	157	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	Pdh	6.0	kW	Tj = -7 °C	COPd	2.80	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = +2 °C	COPd	4.29	-
Tj = +2 °C	Pdh	4.0	kW	Tj = +7 °C	COPd	4.72	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = +12 °C	COPd	4.33	-
Tj = +7 °C	Pdh	2.6	kW	Tj = bivalent temperature	COPd	2.80	-
Degradation co-efficient (**)	Cdh	0.97	-	Tj = operation limit temperature (***)	COPd	2.50	-
Tj = +12 °C	Pdh	2.3	kW	Operation limit temperature	TOL	-20	°C
Degradation co-efficient (**)	Cdh	0.97	-	Heating water operating limit temperature	WTOL	55	°C
Tj = bivalent temperature	Pdh	6.0	kW	Supplementary heater			
Tj = operation limit temperature (***)	Pdh	6.8	kW	Rated heat output (*)	Psup	0.0	kW
Bivalent temperature	Tbiv	-7	°C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	-10	°C	Other items			
Power consumption in modes other than active mode				Rated air flow rate, outdoors			
Off mode	P _{OFF}	0.015	kW			3720	m ³ /h
Thermostat-off mode	P _{TO}	0.015	kW	Capacity control	variable		
Standby mode	P _{SB}	0.015	kW	Sound power level, indoors/outdoors	L _{WA}	41 / 64	dBA
Crankcase heater mode	P _{CK}	0.000	kW	Annual energy consumption	Q _{HE}	3515	kWh
For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		-			η_{wh}	-	%
Daily electricity consumption	Qelec	-	kWh	Contact details			
Annual electricity consumption	AEC	-	kWh	MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS			
				3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan			

The identification and signature of the person empowered to bind the supplier;

The signature is signed in the average climate / medium-temperature section.

Yasutaka MURAKAMI
 Section Manager, Quality Control Section
 Shizuoka JAPAN

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.
 • Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.
 (*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
 (**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
 (***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-5F85VG
	Indoor unit:	ERSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	5.2	kW	Seasonal space heating energy efficiency	η_s	93	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	Pdh	3.2	kW	Tj = -7 °C	COPd	1.91	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = +2 °C	COPd	2.96	-
Tj = +2 °C	Pdh	1.9	kW	Tj = +7 °C	COPd	5.42	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = +12 °C	COPd	6.03	-
Tj = +7 °C	Pdh	2.4	kW	Tj = bivalent temperature	COPd	2.06	-
Degradation co-efficient (**)	Cdh	0.97	-	Tj = operation limit temperature (***)	COPd	1.00	-
Tj = +12 °C	Pdh	2.3	kW	Tj = -15 °C (if TOL < -20 °C)	COPd	1.00	-
Degradation co-efficient (**)	Cdh	0.96	-	Operation limit temperature	TOL	-20	°C
Tj = bivalent temperature	Pdh	3.2	kW	Heating water operating limit temperature	WTOL	55	°C
Tj = operation limit temperature (***)	Pdh	3.8	kW	Supplementary heater			
Tj = -15 °C (if TOL < -20 °C)	Pdh	4.3	kW	Rated heat output (*)	Psup	5.2	kW
Bivalent temperature	Tbiv	-7	°C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	-22	°C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.015	kW				
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	3720	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	41 / 64		dBA			
Annual energy consumption	Q _{HE}	5331		kWh			

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	-			η_{wh}	-	%	
Daily electricity consumption	Q _{elec}	-		kWh			
Annual electricity consumption	AEC	-		kWh			

Contact details
 MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS
 3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

The identification and signature of the person empowered to bind the supplier;
 Yasutaka MURAKAMI
 Section Manager, Quality Control Section
 Shizuoka JAPAN

The signature is signed in the average climate / medium-temperature section.

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.
 • Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.
 (*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
 (**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
 (***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-5F85VG
	Indoor unit:	ERSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit		
Rated heat output (*)	Prated	6.8	kW	Seasonal space heating energy efficiency	η_s	126	%		
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj					
Tj = -7 °C	Pdh	4.1	kW	Tj = -7 °C	COPd	2.81	-		
Degradation co-efficient (**)	Cdh	0.99	-	Tj = +2 °C	COPd	3.71	-		
Tj = +2 °C	Pdh	2.5	kW	Tj = +7 °C	COPd	6.27	-		
Degradation co-efficient (**)	Cdh	0.98	-	Tj = +12 °C	COPd	6.54	-		
Tj = +7 °C	Pdh	2.6	kW	Tj = bivalent temperature	COPd	2.91	-		
Degradation co-efficient (**)	Cdh	0.96	-	Tj = operation limit temperature (***)	COPd	1.73	-		
Tj = +12 °C	Pdh	2.3	kW	Tj = -15 °C (if TOL < -20 °C)	COPd	2.13	-		
Degradation co-efficient (**)	Cdh	0.96	-	Operation limit temperature	TOL	-20	°C		
Tj = bivalent temperature	Pdh	4.1	kW	Heating water operating limit temperature	WTOL	55	°C		
Tj = operation limit temperature (***)	Pdh	5.2	kW	Supplementary heater					
Tj = -15 °C (if TOL < -20 °C)	Pdh	5.6	kW	Rated heat output (*)	Psup	6.8	kW		
Bivalent temperature	Tbiv	-7	°C	Type of energy input	Electrical				
Reference design conditions for space heating	Tdesignh	-22	°C	Power consumption in modes other than active mode					
Off mode				P _{OFF}				0.015	kW
Thermostat-off mode				P _{TO}				0.015	kW
Standby mode				P _{SB}				0.015	kW
Crankcase heater mode				P _{CK}				0.000	kW

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	3720	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	41 / 64	dB(A)				
Annual energy consumption	Q _{HE}	5197	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	-			η_{wh}	-	%	
Daily electricity consumption	Q _{elec}	-	kWh				
Annual electricity consumption	AEC	-	kWh				

Contact details

MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS 3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

The identification and signature of the person empowered to bind the supplier;

Yasutaka MURAKAMI
Section Manager, Quality Control Section
Shizuoka JAPAN

The signature is signed in the average climate / medium-temperature section.

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.
 • Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.
 (*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
 (**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
 (***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-5F85VG
	Indoor unit:	ERSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.1	kW	Seasonal space heating energy efficiency	η_s	159	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	Pdh	-	kW	Tj = -7 °C	COPd	-	-
Degradation co-efficient (**)	Cdh	-	-	Tj = +2 °C	COPd	1.84	-
Tj = +2 °C	Pdh	7.1	kW	Tj = +7 °C	COPd	3.74	-
Degradation co-efficient (**)	Cdh	1.00	-	Tj = +12 °C	COPd	5.26	-
Tj = +7 °C	Pdh	4.6	kW	Tj = bivalent temperature	COPd	1.84	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = operation limit temperature (***)	COPd	1.84	-
Tj = +12 °C	Pdh	2.0	kW	Operation limit temperature	TOL	-20	°C
Degradation co-efficient (**)	Cdh	0.96	-	Heating water operating limit temperature	WTOL	55	°C
Tj = bivalent temperature	Pdh	7.1	kW	Supplementary heater			
Tj = operation limit temperature (***)	Pdh	7.1	kW	Rated heat output (*)	Psup	0.0	kW
Bivalent temperature	Tbiv	2	°C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	2	°C	Power consumption in modes other than active mode			
Off mode				P _{OFF}			
Thermostat-off mode				P _{TO}			
Standby mode				P _{SB}			
Crankcase heater mode				P _{CK}			

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	3720	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	41 / 64	dB(A)				
Annual energy consumption	Q _{HE}	2342	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	-			η_{wh}	-	%	
Daily electricity consumption	Q _{elec}	-	kWh				
Annual electricity consumption	AEC	-	kWh				

Contact details

MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS 3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

The identification and signature of the person empowered to bind the supplier;

Yasutaka MURAKAMI

The signature is signed in the average climate / medium-temperature section. Section Manager, Quality Control Section

Shizuoka JAPAN

* Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.
 * Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.
 (*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
 (**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
 (***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-5F85VG
	Indoor unit:	ERSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit		
Rated heat output (*)	Prated	7.8	kW	Seasonal space heating energy efficiency	η_s	208	%		
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj					
Tj = - 7 °C	Pdh	-	kW	Tj = - 7 °C	COPd	-	-		
Degradation co-efficient (**)	Cdh	-	-	Tj = + 2 °C	COPd	3.00	-		
Tj = + 2 °C	Pdh	7.8	kW	Tj = + 7 °C	COPd	5.22	-		
Degradation co-efficient (**)	Cdh	0.99	-	Tj = +12 °C	COPd	6.29	-		
Tj = + 7 °C	Pdh	5.0	kW	Tj = bivalent temperature	COPd	3.00	-		
Degradation co-efficient (**)	Cdh	0.98	-	Tj = operation limit temperature (***)	COPd	3.00	-		
Tj = +12 °C	Pdh	2.2	kW	Operation limit temperature	TOL	-20	°C		
Degradation co-efficient (**)	Cdh	0.96	-	Heating water operating limit temperature	WTOL	55	°C		
Tj = bivalent temperature	Pdh	7.8	kW	Supplementary heater					
Tj = operation limit temperature (***)	Pdh	7.8	kW	Rated heat output (*)	Psup	0.0	kW		
Bivalent temperature	Tbiv	2	°C	Type of energy input	Electrical				
Reference design conditions for space heating	Tdesignh	2	°C	Power consumption in modes other than active mode					
Off mode				P _{OFF}				0.015	kW
Thermostat-off mode				P _{TO}				0.015	kW
Standby mode				P _{SB}				0.015	kW
Crankcase heater mode				P _{CK}				0.000	kW

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	3720	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	41 / 64		dBA			
Annual energy consumption	Q _{HE}	1971		kWh			

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	-			η_{wh}	-	%	
Daily electricity consumption	Q _{elec}	-		kWh			
Annual electricity consumption	AEC	-		kWh			

Contact details
 MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS
 3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

The identification and signature of the person empowered to bind the supplier;
 Yasutaka MURAKAMI
 Section Manager, Quality Control Section
 Shizuoka JAPAN

The signature is signed in the average climate / medium-temperature section.

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.
 • Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.
 (*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
 (**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.
 (***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.