



ENERG  
енергия · ενέργεια

Y IJA  
IE IA


 MITSUBISHI  
ELECTRIC

CAHV-R450YA-HPB(-BS)



55 °C

35 °C

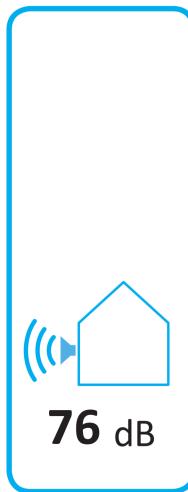

■ 47  
■ 27  
■ 18  
kW

■ 49  
■ 27  
■ 18  
kW



2019

811/2013

		For medium-temperature application.												For low-temperature application.																													
1	2	3	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
Outdoor unit	Indoor unit	✓	Medium-temperature application	Seasonal space heating energy efficiency class	Water heating energy efficiency class	Rated heat output under average climate conditions	For space heating, annual energy consumption under average climate conditions	For water heating, annual electricity consumption under average climate conditions	Seasonal space heating energy efficiency under average climate conditions	Water heating energy efficiency under average climate conditions	Work only during off-peak hours	Rated heat output under colder climate conditions	For space heating, annual energy consumption under warmer climate conditions	For space heating, annual energy consumption under colder climate conditions	For space heating, annual energy consumption under warmer climate conditions	For water heating, annual energy consumption under warmer climate conditions	Seasonal space heating energy efficiency under warmer climate conditions	Water heating energy efficiency under warmer climate conditions	Work only during off-peak hours	Rated heat output under average climate conditions	For space heating, annual energy consumption under average climate conditions	For water heating, annual electricity consumption under average climate conditions	Seasonal space heating energy efficiency under average climate conditions	Water heating energy efficiency under average climate conditions	Sound power level L <sub>WA</sub> indoor	For space heating, annual energy consumption under warmer climate conditions	For water heating, annual energy consumption under warmer climate conditions	Seasonal space heating energy efficiency under warmer climate conditions	Water heating energy efficiency under warmer climate conditions	Work only during off-peak hours	Rated heat output under colder climate conditions	For space heating, annual energy consumption under colder climate conditions	For water heating, annual energy consumption under warmer climate conditions	Seasonal space heating energy efficiency under warmer climate conditions	Water heating energy efficiency under warmer climate conditions	Sound power level L <sub>WA</sub> outdoor							
CAHV-R450YA-HPB-(BS)	-	✓	A++	-	27	55678	-	127	-	-	47	18	115855	23681	-	-	91	132	-	-	76	-	27	55468	-	140	-	-	49	18	120924	24144	-	-	105	160	-	-	76				

	English	Deutsch	Français	Italiano	Español
	Nederlands	Svenska	Dansk	Português	Ελληνικά
	suomi	Čeština	Български	Polski	-
1	Outdoor unit	Außengerät	unità esteriore	unità esterna	-
2	buitenuit	Utomhusenhet	Udenders enhed	unidade exterior	-
3	Sisäyskikkö	Inomhusenhet	Indanders enhed	unidad interior	Εσωτερική μονάδα
4	Medium-temperature application	Mitteltemperaturanwendung	l'application à moyenne température	le applicazioni a media temperatura	la aplicación de media temperatura
5	middletemperatur-toepassing	mediumtemperaturapplikation	middletemperaturanvendelsen	a aplicação a média temperatura	η εφαρμογή σε μέση θερμοκρασία
6	keskilämpötilän sovellus	středotemperaturní aplikace	среднотемпературное приложение	zastosowania w średnich temperaturach	-
7	Low-temperature application	NiederTemperaturanwendung	l'application à basse température	le applicazioni a bassa temperatura	la aplicación de baja temperatura
8	lagettemperatur-toepassing	lägetemperaturapplikation	lätempertaturanvendelsen	a aplicação a baixa temperatura	η εφαρμογή σε χαμηλή θερμοκρασία
9	matlanlämpötilän sovellus	nízkotepelní aplikace	нижнотемпературный приложения	zastosowania w niskich temperaturach	-
10	Seasonal space heating energy efficiency class	die Klasse für die jahreszeitbedingte Raumheizungs-Energieeffizienz	la classe d'efficacité énergétique saisonnière, pour le chauffage des locaux	la classe di efficienza energetica stagionale del riscaldamento d'ambiente	la clase de eficiencia energética estacional de calefacción
11	de seizoensgebonden energie-efficiëntieklassen voor ruimteverwarming	säsongsmädelverkningsgrad vid rumtappvarmning	klassen för årsvarningsgrad ved rumopvarming	A classe de eficiência energética do aquecimento ambiente sazonal	η τάξη ενεργειακής απόδοσης της εποχιακής θέρμανσης χώρου
12	tilalämmitykseen kausittainen energiatehokkuusluokka	trída sezónně energetické účinnosti vytápění	klasť na sezónnata otopenitelná energetická efektivita	klasa sezonowej efektywności energetycznej ogrzewania pomieszczeń	-
13	Water heating energy efficiency class	die Klasse für die Warmwasserbereitungs-Energieeffizienz	la classe d'efficacité énergétique, pour le chauffage de l'eau	la classe di efficienza energetica del riscaldamento dell'acqua	la clase de eficiencia energética del caldeo de agua
14	de energie-efficiëntieklassen voor waterverwarming	energielämmityksen energiatehokkuusluokka	klassen för årsvarningsgrad vid vattenuppvärmning	A classe de eficiência energética do aquecimento de água	η τάξη ενεργειακής απόδοσης θέρμανσης νερού
15	vedenlämmityksen energiatehokkuusluokka	trída energetické účinnosti ohřevu vody	klasť na energetickú efektivitu pri podgrávaní na vodu	klasa efektywnosci energetycznej podgrzewania wody	-
16	Rated heat output under average climate conditions	die Wärmenennleistung bei durchschnittlichen Klimaverhältnissen	la puissance thermique nominale dans les conditions climatiques moyennes	la potencia calorífica nominal(en condiciones climáticas medias)	la potencia calorífica nominal(en condiciones climáticas medias)
17	de nominale warmteafgifte(onder gemiddelde klimaatomstandigheden)	Den nominella avgivna värmeeffekten(under genomsnittliga klimatförhållanden)	den nominelle nyttoeffekt(under gennemsnitlige klimaforhold)	A potência calorífica nominal(em condições climáticas médias)	η ονομαστική θερμική ισχύς(υπό μέσες κλιματικές συνθήκες)
18	tilalämmitykseen kausittainen energiatehokkuusluokka	jmenovitý tepelný výkon(z průměrných klimatických podmínek)	nominalnata moc cieplna(w warunkach klimatu umiarkowanego)	znamionowa moc cieplna(w warunkach klimatu umiarkowanego)	-
19	For space heating, annual energy consumption under average climate conditions	für die Raumheizung, den jährlichen Energieverbrauch bei durchschnittlichen Klimaverhältnissen	pour le chauffage des locaux, la consommation annuelle d'énergie(dans les conditions climatiques moyennes)	per il riscaldamento d'ambiente, il consumo annuo di energia(in condizioni climatiche medie)	para calentar espacios, el consumo anual de energía(en condiciones climáticas medias)
20	voor ruimteverwarming, het jaarlijkse energieverbruik(onder gemiddelde klimaatomstandigheden)	För rumsuppvärmning, årlig energiförbrukning(vid genomsnittliga klimatförhållanden)	for rumopvarming det årlige energiforbrug(under gennemsnitlige klimaforhold)	Para o aquecimento ambiente, o consumo anual de energia(em condições climáticas medias)	για τη θέρμανση χώρου, η ετήσια κατανάλωση ενέργειας(υπό μέσες κλιματικές συνθήκες)
21	tilalämmitykseen kausittainen energiatehokkuusluokka	pro vytápění – roční spotřeba energie za průměrných klimatických podmínek	za opalovanie, годишното потребление на енергия(при средни климатични условия)	w odniesieniu do ogrzewania pomieszczeń, roczne zużycie energii(w warunkach klimatu umiarkowanego)	-
22	For water heating, annual electricity consumption under average climate conditions	für die Warmwasserbereitung, den jährlichen Stromverbrauch bei durchschnittlichen Klimaverhältnissen	pour le chauffage de l'eau, la consommation annuelle d'électricité(dans les conditions climatiques moyennes)	per il riscaldamento dell'acqua, il consumo annuo di energia(in condizioni climatiche medie)	para calentar agua, el consumo anual de electricidad(en condiciones climáticas medias)
23	voor waterverwarming, het jaarlijkse elektriciteitsverbruik(onder gemiddelde klimaatomstandigheden)	För vattenuppvärmning, årlig elförbrukning(vid genomsnittliga klimatförhållanden)	for vandopvarming det årlige elforbrug(under gennemsnitlige klimaforhold)	para o aquecimento de água, o consumo anual de eletricidade(em condições climáticas medias)	για τη θέρμανση νερού, η ετήσια κατανάλωση ηλεκτρικής ενέργειας(υπό μέσες κλιματικές συνθήκες)
24	vedenlämmityksen energiatehokkuusluokka	pro ohřev vody – roční spotřeba elektrické energie za průměrných klimatických podmínek	za podgrávanie na voda, годишното потребление на вода(при средни климатични условия)	w odniesieniu do podgrzewania wody, roczne zużycie energii elektrycznej(w warunkach klimatu umiarkowanego)	-
25	Seasonal space heating energy efficiency under average climate conditions	die Jahreszeitbedingte Raumheizungs-Energieeffizienz bei durchschnittlichen Klimaverhältnissen	l'efficacité énergétique saisonnière pour le chauffage des locaux(dans les conditions climatiques moyennes)	l'efficienza energetica stagionale di riscaldamento d'ambiente(in condizioni climatiche medie)	la eficiencia energética estacional de calefacción(en condiciones climáticas medias)
26	de seizoensgebonden energie-efficiëntie voor ruimteverwarming(onder gemiddelde klimaatomstandigheden)	Säsongsmädelverkningsgrad för rumtappvarmning(vid genomsnittliga klimatförhållanden)	årsvarningsgraden ved rumopvarming(under gennemsnitlige klimaforhold)	A eficiencia energética do aquecimento ambiente sazonal(em condições climáticas médias)	η ενεργειακή απόδοση της εποχιακής θέρμανσης χώρου(υπό μέσες κλιματικές συνθήκες)
27	tilalämmitykseen kausittainen energiatehokkuusluokka	sezonní energetická účinnost vytápění za průměrných klimatických podmínek	sezonálna energetická účinnosť vytápiania za príslušné klimatické podmienky	sezonowa efektywność energetyczna ogrzewania pomieszczeń(w warunkach klimatu umiarkowanego)	-
28	Water heating energy efficiency under average climate conditions	die Warmwasserbereitungs-Energieeffizienz bei durchschnittlichen Klimaverhältnissen	l'efficacité énergétique pour le chauffage de l'eau(dans les conditions climatiques moyennes)	l'efficienza energetica di riscaldamento dell'acqua(in condizioni climatiche medie)	la eficiencia energética del caldeo de agua(en condiciones climáticas medias)
29	de energie-efficiëntie voor waterverwarming(onder gemiddelde klimaatomstandigheden)	Energieeffektivitet vid vattenuppvärmning(vid genomsnittliga klimatförhållanden)	energielämmityksen energiatehokkuusluokka	a eficiencia energética do aquecimento de água(em condições climáticas médias)	η ενεργειακή απόδοση νερού(υπό μέσες κλιματικές συνθήκες)
30	vedenlämmityksen energiatehokkuusluokka	energetická účinnost ohřevu vody za průměrných klimatických podmínek	energičnata efektivita pri podgrávaní na vodu	efektywnosć energetyczna podgrzewania wody(w warunkach klimatu chłodnego)	-
31	Sound power level L <sub>WA</sub> indoor	der Schallleistungspegel L <sub>WA</sub> , in Gebäuden	le niveau de puissance acoustique L <sub>WA</sub> , à l'intérieur	el nivel de potencia acústica L <sub>WA</sub> , all'interno	el nivel de potencia acústica L <sub>WA</sub> , en interiores
32	het geluidsvormogensniveau L <sub>WA</sub> binnen	Ljudeffektivitén L <sub>WA</sub> i inomhus	lydefektivitetet L <sub>WA</sub> , i inde	O nível de potência sonora L <sub>WA</sub> , no interior	η στάθμη ηχητικής ισχύος L <sub>WA</sub> , εσωτερικό χώρου
33	tilalämmitykseen kausittainen energiatehokkuusluokka	hladina akustického výkonu L <sub>WA</sub> ve vnitřním prostoru	hladina akustického výkonu L <sub>WA</sub> na zákrite	poziom mocy akustycznej L <sub>WA</sub> w pomieszczeniu	-
34	Work only during off-peak hours	dass ein ausschließlicher Betrieb des Kombiheizgerätes zu Schwachlastzeiten	fonctionne qu'en heures creuses	funciona solamente durante las horas de pico	funcionar solamente durante las horas de baja demanda
35	werken uitsluitend in de daluren	drives uteslutande under perioder med låg belastning	fungere uden for spidsbelastningsperioder	de funcionar únicamente fora das horas de pico	λειτουργία μόνο εκτός των ώρων αιχμής
36	toimimaan ainoastaan kulutushuipujen ulkopuolella	provouz pouze mimo špičku	pracovati samo u časovete izven výrobovho natovarbanie	pracować jedynie w godzinach poza szczytowym obciążeniem	-
37	Rated heat output under colder climate conditions	die Wärmenennleistung bei kälteren Klimaverhältnissen	la puissance thermique nominale, dans les conditions climatiques plus froides	la potencia calorífica nominal, en condiciones climáticas más frías	la potencia calorífica nominal en condiciones climáticas más frías
38	de nominale warmteafgifte, onder koudere klimaatomstandigheden	Nominell avgiven värmeeffekt vid kallare klimatförhållanden	den nominelle nyttoeffekt under koldre klimaforhold	A potência calorífica nominal em condições climáticas mais frias	η ονομαστική θερμική ισχύς υπό ψυχρότερες κλιματικές συνθήκες
39	tilalämmitykseen kausittainen energiatehokkuusluokka	jmenovitý tepelný výkon za chladnejších klimatických podmínek	nominalnata moc cieplna pri po-studeni klimaticiniu условия	znamionowa moc cieplna w warunkach klimatu chłodnego	-
40	Rated heat output under warmer climate conditions	die Wärmenennleistung bei wärmeren Klimaverhältnissen	la puissance thermique nominale, dans les conditions climatiques plus chaudes	la potencia calorífica nominal, en condiciones climáticas más calidas	la potencia calorífica nominal en condiciones climáticas más calidas
41	de nominale warmteafgifte, onder warmere klimaatomstandigheden	Nominell avgiven värmeeffekt vid varmare klimatförhållanden	den nominelle nyttoeffekt under varmare klimaforhold	A potência calorífica nominal em condições climáticas mais quentes	η ονομαστική θερμική ισχύς υπό ψυχρότερες κλιματικές συνθήκες
42	tilalämmitykseen kausittainen energiatehokkuusluokka	jmenovitý tepelný výkon za teplejších klimatických podmínek	nominalnata moc cieplna pri po-topli klimaticiniu условия	znamionowa moc cieplna w warunkach klimatu cieplego	-
43	For space heating, annual energy consumption under colder climate conditions	für die Raumheizung, der jährliche Energieverbrauch bei kälteren Klimaverhältnissen	pour le chauffage des locaux, la consommation annuelle d'énergie, dans les conditions climatiques plus froides	per il riscaldamento d'ambiente, il consumo annuo di energia, in condizioni climatiche più fredde	para calentar espacios, el consumo anual de energía en condiciones climáticas más frías
44	voor ruimteverwarming, het jaarlijkse energieverbruik onder koudere klimaatomstandigheden	För rumsuppvärmning, årlig energiförbrukning under kallare klimatförhållanden	for rumopvarming det årlige energiforbrug under koldre klimaforhold	Para o aquecimento ambiente, o consumo anual de energia em condições climáticas mais frias	για τη θέρμανση χώρου, η ετήσια κατανάλωση ενέργειας υπό ψυχρότερες κλιματικές συνθήκες
45	tilalämmitykseen kausittainen energiatehokkuusluokka	pro vytápění – roční spotřeba energie za chladnejších klimatických podmínek	za opalovanie, годишното потребление на енергия при по- студени климатични условия	w odniesieniu do ogrzewania pomieszczeń, roczne zużycie energii w warunkach klimatu chłodnego	-
46	For space heating, annual energy consumption under warmer climate conditions	für die Raumheizung, der jährliche Energieverbrauch bei wärmeren Klimaverhältnissen	pour le chauffage des locaux, la consommation annuelle d'énergie, dans les conditions climatiques plus chaudes	per il riscaldamento d'ambiente, il consumo annuo di energia, in condizioni climatiche più calde	para calentar espacios, el consumo anual de energía en condiciones climáticas más calidas
47	voor ruimteverwarming, het jaarlijkse energieverbruik onder warmere klimaatomstandigheden	För vattenuppvärmning, årlig energiförbrukning under varmare klimatförhållanden	for rumopvarming det årlige energiforbrug under varmare klimaforhold	Para o aquecimento ambiente, o consumo anual de energia em condições climáticas mais quentes	για τη θέρμανση χώρου, η ετήσια κατανάλωση ενέργειας υπό θερμότερες κλιματικές συνθήκες
48	tilalämmitykseen kausittainen energiatehokkuusluokka	pro vytápění – roční spotřeba energie za teplejších klimatických podmínek	za opalovanie, годишното потребление на енергия при по- студени климатични условия	w odniesieniu do ogrzewania pomieszczeń, roczne zużycie energii w warunkach klimatu cieplego	-
49	For water heating, annual electricity consumption under colder climate conditions	für die Warmwasserbereitung, der jährliche Stromverbrauch bei kälteren Klimaverhältnissen	pour le chauffage de l'eau, la consommation annuelle d'électricité, dans les conditions climatiques plus froides	per il riscaldamento dell'acqua, il consumo annuo di energia, in condizioni climatiche più fredde	para calentar agua, el consumo anual de electricidad en condiciones climáticas más frías
50	voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder koudere klimaatomstandigheden	För vattenuppvärmning, årlig elförbrukning under kallare klimatförhållanden	for vandopvarming det årlige elforbrug under koldre klimaforhold	Para o aquecimento ambiente, o consumo anual de eletricidade em condições climáticas mais frias	για τη θέρμανση νερού, η ετήσια κατανάλωση ηλεκτρικής ενέργειας υπό ψυχρότερες κλιματικές συνθήκες
51	tilalämmitykseen kausittainen energiatehokkuusluokka	pro vytápění – roční spotřeba energie za chladnejších klimatických podmínek	za opalovanie, годишното потребление на електроенергия при по- студени климатични условия	w odniesieniu do podgrzewania wody, roczne zużycie energii elektrycznej w warunkach klimatu chłodnego	-
52	For water heating, annual energy consumption under warmer climate conditions	für die Warmwasserbereitung, der jährliche Stromverbrauch bei wärmeren Klimaverhältnissen	pour le chauffage de l'eau, la consommation annuelle d'électricité, dans les conditions climatiques plus chaudes	per il riscaldamento dell'acqua, il consumo annuo di energia, in condizioni climatiche più calde	para calentar agua, el consumo anual de electricidad en condiciones climáticas más calidas
53	voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder warmere klimaatomstandigheden	För vattenuppvärmning, årlig elförbrukning under varmare klimatförhållanden	for vandopvarming det årlige elforbrug under varmere klimaforhold	para o aquecimento de água, o consumo anual de eletricidade em condições climáticas mais quentes	για θέρμανση νερού, η ετήσια κατανάλωση ηλεκτρικής ενέργειας υπό θερμότερες κλιματικές συνθήκες
54	tilalämmitykseen kausittainen energiatehokkuusluokka	pro vytápění – roční spotřeba elektrické energie za chladnejších klimatických podmínek	za opalovanie, годишното потребление на електроенергия при по- студени климатични условия	w odniesieniu do podgrzewania wody, roczne zużycie energii elektrycznej w warunkach klimatu chłodnego	-
55	For space heating, annual energy consumption under warmer climate conditions	für die Raumheizung, der jährliche E			

Model(s):	Outdoor unit:	CAHV-R450YA-HPB-(BS)	
	Indoor unit:	-	
Air-to-water heat pump:	yes		
Water-to-water heat pump:	no		
Brine-to-water heat pump:	no		
Low-temperature heat pump:	no		
Equipped with a supplementary heater:	no		
Heat pump combination heater:	no		
Parameters for	medium-temperature application.		
Parameters for	average climate conditions.		

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
<b>Rated heat output (*)</b>	Prated	27	kW	<b>Seasonal space heating energy efficiency</b>	$\eta_s$	127	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj						Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj	
Tj= - 7 °C	Pdh	23.8	kW	Tj= - 7 °C	COPd	2.08	-
Degradation co-efficient (**)	Cdh	0.9	-	Tj= + 2 °C	COPd	3.22	-
Tj= + 2 °C	Pdh	14.7	kW	Tj= + 7 °C	COPd	4.60	-
Degradation co-efficient (**)	Cdh	0.9	-	Tj= +12 °C	COPd	5.81	-
Tj= + 7 °C	Pdh	13.9	kW	Tj= bivalent temperature	COPd	2.08	-
Degradation co-efficient (**)	Cdh	0.9	-	Tj= operation limit temperature	COPd	1.72	-
Tj= +12 °C	Pdh	13.7	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	-	-
Degradation co-efficient (**)	Cdh	0.9	-	Operation limit temperature	TOL	-10	°C
Tj= bivalent temperature	Pdh	23.8	kW	Heating water operating limit temperature	WTOL	70	°C
Tj= operation limit temperature	Pdh	27.0	kW				
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	-	kW				
Bivalent temperature	Tbiv	-7	°C				
Power consumption in modes other than active mode						Supplementary heater	
Off mode	P <sub>OFF</sub>	0.014	kW	Rated heat output (*)		Psup	0.0
Thermostat-off mode	P <sub>TO</sub>	0.014	kW	Type of energy input			
Standby mode	P <sub>SB</sub>	0.014	kW				
Crankcase heater mode	P <sub>CK</sub>	0.065	kW				

#### Other items

Capacity control	Variable		Rated air flow rate, outdoors	-	18000	m <sup>3</sup> /h
Sound power level, indoors/outdoors	L <sub>WA</sub>	-76	dBA			
Annual energy consumption	Q <sub>HE</sub>	17161	kWh			

#### For heat pump combination heater:

Declared load profile	-		Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Qelec	-	kW/h			
Annual electricity consumption	AEC	-	kW/h			

#### Contact details

MITSUBISHI ELECTRIC CORPORATION AIR-CONDITIONING & REFRIGERATION SYSTEMS WORKS 5-66, Tebira, 6-Chome, Wakayama City 640-8686, Japan

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	CAHV-R450YA-HPB-(BS)	
	Indoor unit:	-	
Air-to-water heat pump:	yes		
Water-to-water heat pump:	no		
Brine-to-water heat pump:	no		
Low-temperature heat pump:	no		
Equipped with a supplementary heater:	no		
Heat pump combination heater:	no		
Parameters for	medium-temperature application.		
Parameters for	colder climate conditions.		

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	47	kW	Seasonal space heating energy efficiency	$\eta_s$	91	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj						Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj	
Tj= - 7 °C	Pdh	29.1	kW	Tj= - 7 °C	COPd	2.14	-
Degradation co-efficient (**)	Cdh	0.9	-	Tj= + 2 °C	COPd	3.27	-
Tj= + 2 °C	Pdh	17.7	kW	Tj= + 7 °C	COPd	4.28	-
Degradation co-efficient (**)	Cdh	0.9	-	Tj= +12 °C	COPd	5.63	-
Tj= + 7 °C	Pdh	14.0	kW	Tj= bivalent temperature	COPd	2.14	-
Degradation co-efficient (**)	Cdh	0.9	-	Tj= operation limit temperature	COPd	1.58	-
Tj= +12 °C	Pdh	14.0	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	-	-
Degradation co-efficient (**)	Cdh	0.9	-	Operation limit temperature	TOL	-20	°C
Tj= bivalent temperature	Pdh	29.1	kW	Heating water operating limit temperature	WTOL	70	°C
Tj= operation limit temperature	Pdh	19.7	kW				
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	-	kW				
Bivalent temperature	Tbiv	-7	°C				
Power consumption in modes other than active mode						Supplementary heater	
Off mode	P <sub>OFF</sub>	0.014	kW	Rated heat output (*)	P <sub>sup</sub>	47.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.014	kW	Type of energy input			
Standby mode	P <sub>SB</sub>	0.014	kW				
Crankcase heater mode	P <sub>CK</sub>	0.065	kW				

#### Other items

Capacity control	Variable		Rated air flow rate, outdoors	-	18000	m <sup>3</sup> /h
Sound power level, indoors/outdoors	L <sub>WA</sub>	-76	dBA			
Annual energy consumption	Q <sub>HE</sub>	49179	kWh			

#### For heat pump combination heater:

Declared load profile	-		Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Qelec	-	kWh/h			
Annual electricity consumption	AEC	-	kWh/h			

#### Contact details

MITSUBISHI ELECTRIC CORPORATION AIR-CONDITIONING & REFRIGERATION SYSTEMS WORKS 5-66, Tebira, 6-Chome, Wakayama City 640-8686, Japan

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

Model(s):	Outdoor unit:	CAHV-R450YA-HPB-(BS)	
	Indoor unit:	-	
Air-to-water heat pump:	yes		
Water-to-water heat pump:	no		
Brine-to-water heat pump:	no		
Low-temperature heat pump:	no		
Equipped with a supplementary heater:	no		
Heat pump combination heater:	no		
Parameters for	medium-temperature application.		
Parameters for	warmer climate conditions.		

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	18	kW	Seasonal space heating energy efficiency	$\eta_s$	132	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj= - 7 °C	Pdh	-	kW	Tj= - 7 °C	COPd	-	-
Degradation co-efficient (**)	Cdh	-	-	Tj= + 2 °C	COPd	2.23	-
Tj= + 2 °C	Pdh	17.7	kW	Tj= + 7 °C	COPd	3.28	-
Degradation co-efficient (**)	Cdh	0.9	-	Tj= +12 °C	COPd	4.97	-
Tj= + 7 °C	Pdh	14.0	kW	Tj= bivalent temperature	COPd	1.76	-
Degradation co-efficient (**)	Cdh	0.9	-	Tj= operation limit temperature	COPd	2.28	-
Tj= +12 °C	Pdh	14.0	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	-	-
Degradation co-efficient (**)	Cdh	0.9	-	Operation limit temperature	TOL	-10	°C
Tj= bivalent temperature	Pdh	29.1	kW	Heating water operating limit temperature	WTOL	70	°C
Tj= operation limit temperature	Pdh	27.8	kW				
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	-	kW				
Bivalent temperature	Tbiv	-7	°C				
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.014	kW	Rated heat output (*)	Psup	0.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.014	kW	Type of energy input			
Standby mode	P <sub>SB</sub>	0.014	kW				
Crankcase heater mode	P <sub>CK</sub>	0.065	kW				
Other items							
Capacity control	Variable			Rated air flow rate, outdoors	-	18000	m <sup>3</sup> /h
Sound power level, indoors/outdoors	L <sub>WA</sub>	-76	dBA				
Annual energy consumption	Q <sub>HE</sub>	7018	kWh				

For heat pump combination heater:	Declared load profile	-	Water heating energy efficiency	$\eta_{wh}$	-	%
	Daily electricity consumption	Qelec	-	kW/h		
	Annual electricity consumption	AEC	-	kW/h		

#### Contact details

MITSUBISHI ELECTRIC CORPORATION AIR-CONDITIONING & REFRIGERATION SYSTEMS WORKS 5-66, Tebira, 6-Chome, Wakayama City 640-8686, Japan

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	CAHV-R450YA-HPB-(BS)	
	Indoor unit:	-	
Air-to-water heat pump:	yes		
Water-to-water heat pump:	no		
Brine-to-water heat pump:	no		
Low-temperature heat pump:	no		
Equipped with a supplementary heater:	no		
Heat pump combination heater:	no		
Parameters for	low-temperature application.		
Parameters for	average climate conditions.		

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
<b>Rated heat output (*)</b>	Prated	27	kW	<b>Seasonal space heating energy efficiency</b>	$\eta_s$	140	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj						Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj	
Tj= - 7 °C	Pdh	23.8	kW	Tj= - 7 °C	COPd	2.60	-
Degradation co-efficient (**)	Cdh	0.9	-	Tj= + 2 °C	COPd	3.33	-
Tj= + 2 °C	Pdh	15.3	kW	Tj= + 7 °C	COPd	5.20	-
Degradation co-efficient (**)	Cdh	0.9	-	Tj= +12 °C	COPd	5.05	-
Tj= + 7 °C	Pdh	9.3	kW	Tj= bivalent temperature	COPd	2.60	-
Degradation co-efficient (**)	Cdh	0.9	-	Tj= operation limit temperature	COPd	2.21	-
Tj= +12 °C	Pdh	8.7	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	-	-
Degradation co-efficient (**)	Cdh	0.9	-	Operation limit temperature	TOL	-10	°C
Tj= bivalent temperature	Pdh	23.8	kW	Heating water operating limit temperature	WTOL	70	°C
Tj= operation limit temperature	Pdh	26.9	kW				
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	-	kW				
Bivalent temperature	Tbiv	-7	°C				
Power consumption in modes other than active mode						Supplementary heater	
Off mode	P <sub>OFF</sub>	0.014	kW	Rated heat output (*)		Psup	0.0
Thermostat-off mode	P <sub>TO</sub>	0.014	kW	Type of energy input			
Standby mode	P <sub>SB</sub>	0.014	kW				
Crankcase heater mode	P <sub>CK</sub>	0.065	kW				
Other items							
Capacity control	Variable		Rated air flow rate, outdoors		-	18000	m <sup>3</sup> /h
Sound power level, indoors/outdoors	L <sub>WA</sub>	-76	dBA				
Annual energy consumption	Q <sub>HE</sub>	15556	kWh				

For heat pump combination heater:	Declared load profile	-	Water heating energy efficiency	$\eta_{wh}$	-	%
	Daily electricity consumption	Qelec	-	kW/h		
	Annual electricity consumption	AEC	-	kW/h		

#### Contact details

MITSUBISHI ELECTRIC CORPORATION AIR-CONDITIONING & REFRIGERATION SYSTEMS WORKS 5-66, Tebira, 6-Chome, Wakayama City 640-8686, Japan

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

Model(s):	Outdoor unit:	CAHV-R450YA-HPB-(BS)	
	Indoor unit:	-	
Air-to-water heat pump:	yes		
Water-to-water heat pump:	no		
Brine-to-water heat pump:	no		
Low-temperature heat pump:	no		
Equipped with a supplementary heater:	no		
Heat pump combination heater:	no		
Parameters for	low-temperature application.		
Parameters for	colder climate conditions.		

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	49	kW	Seasonal space heating energy efficiency	$\eta_s$	105	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj						Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj	
Tj= - 7 °C	Pdh	29.7	kW	Tj= - 7 °C	COPd	2.53	-
Degradation co-efficient (**)	Cdh	0.9	-	Tj= + 2 °C	COPd	3.82	-
Tj= + 2 °C	Pdh	18.1	kW	Tj= + 7 °C	COPd	4.93	-
Degradation co-efficient (**)	Cdh	0.9	-	Tj= +12 °C	COPd	4.99	-
Tj= + 7 °C	Pdh	11.6	kW	Tj= bivalent temperature	COPd	2.53	-
Degradation co-efficient (**)	Cdh	0.9	-	Tj= operation limit temperature	COPd	2.91	-
Tj= +12 °C	Pdh	8.7	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	-	-
Degradation co-efficient (**)	Cdh	0.9	-	Operation limit temperature	TOL	-10	°C
Tj= bivalent temperature	Pdh	29.7	kW	Heating water operating limit temperature	WTOL	70	°C
Tj= operation limit temperature	Pdh	28.0	kW				
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	-	kW				
Bivalent temperature	Tbiv	-7	°C				
Power consumption in modes other than active mode						Supplementary heater	
Off mode	P <sub>OFF</sub>	0.014	kW	Rated heat output (*)	P <sub>sup</sub>	49.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.014	kW	Type of energy input			
Standby mode	P <sub>SB</sub>	0.014	kW				
Crankcase heater mode	P <sub>CK</sub>	0.065	kW				
Other items							
Capacity control	Variable			Rated air flow rate, outdoors	-	18000	m <sup>3</sup> /h
Sound power level, indoors/outdoors	L <sub>WA</sub>	-76	dBA				
Annual energy consumption	Q <sub>HE</sub>	44894	kWh				

For heat pump combination heater:	Declared load profile	-	Water heating energy efficiency	$\eta_{wh}$	-	%
	Daily electricity consumption	Q <sub>elec</sub>	-			
	Annual electricity consumption	AEC	-			

#### Contact details

MITSUBISHI ELECTRIC CORPORATION AIR-CONDITIONING & REFRIGERATION SYSTEMS WORKS 5-66, Tebira, 6-Chome, Wakayama City 640-8686, Japan

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

Model(s):	Outdoor unit:	CAHV-R450YA-HPB-(BS)	
	Indoor unit:	-	
Air-to-water heat pump:	yes		
Water-to-water heat pump:	no		
Brine-to-water heat pump:	no		
Low-temperature heat pump:	no		
Equipped with a supplementary heater:	no		
Heat pump combination heater:	no		
Parameters for	low-temperature application.		
Parameters for	warmer climate conditions.		

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
<b>Rated heat output (*)</b>	Prated	18	kW	<b>Seasonal space heating energy efficiency</b>	$\eta_s$	160	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj= - 7 °C	Pdh	-	kW	Tj= - 7 °C	COPd	-	-
Degradation co-efficient (**)	Cdh	-	-	Tj= + 2 °C	COPd	3.40	-
Tj= + 2 °C	Pdh	18.1	kW	Tj= + 7 °C	COPd	4.24	-
Degradation co-efficient (**)	Cdh	0.9	-	Tj= +12 °C	COPd	5.03	-
Tj= + 7 °C	Pdh	11.6	kW	Tj= bivalent temperature	COPd	2.53	-
Degradation co-efficient (**)	Cdh	0.9	-	Tj= operation limit temperature	COPd	3.12	-
Tj= +12 °C	Pdh	9.4	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	-	-
Degradation co-efficient (**)	Cdh	0.9	-	Operation limit temperature	TOL	-10	°C
Tj= bivalent temperature	Pdh	29.7	kW	Heating water operating limit temperature	WTOL	70	°C
Tj= operation limit temperature	Pdh	28.0	kW				
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	-	kW				
Bivalent temperature	Tbiv	-7	°C				
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.014	kW	Rated heat output (*)	P <sub>sup</sub>	0.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.014	kW	Type of energy input			
Standby mode	P <sub>SB</sub>	0.014	kW				
Crankcase heater mode	P <sub>CK</sub>	0.065	kW				
Other items							
Capacity control	Variable			Rated air flow rate, outdoors	-	18000	m <sup>3</sup> /h
Sound power level, indoors/outdoors	L <sub>WA</sub>	-76	dBA				
Annual energy consumption	Q <sub>HE</sub>	5929	kWh				
For heat pump combination heater:							
Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Qelec	-	kW/h				
Annual electricity consumption	AEC	-	kW/h				
Contact details							
MITSUBISHI ELECTRIC CORPORATION AIR-CONDITIONING & REFRIGERATION SYSTEMS WORKS 5-66, Tebira, 6-Chome, Wakayama City 640-8686, Japan							

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.