



ENERG


енергия · ενεργεια



Indoor unit EHPT20X-**C(W)
Outdoor unit PUHZ-HW140VHA2(-BS)



A++

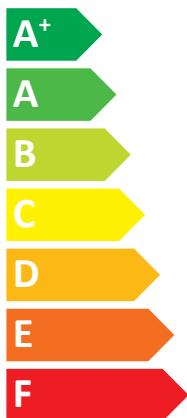

A

Two icons showing sound power levels. The top icon shows a speaker inside a house with the text "40 dB". The bottom icon shows a speaker outside a house with the text "67 dB".



- 14 kW
- **16 kW**
- 14 kW

2019

811/2013

RH79A039H04

1.SPACE HEATER

		For medium-temperature application											For low-temperature application															
1	2	3	6	8	11	9	13	15	16	21	22	17	18	25	4	6	8	11	9	13	15	16	21	22	17	18	25	
Outdoor unit	Indoor unit	Medium-temperature application											Low-temperature application															
		Medium-temperature application	Seasonal space heating energy efficiency class	Rated heat output under average climate conditions	Seasonal space heating energy efficiency under average climate conditions	For space heating, annual energy consumption under average climate conditions	Sound power level L _{WA} , indoor	Rated heat output under colder climate conditions	Rated heat output under warmer climate conditions	Seasonal space heating energy efficiency under colder climate conditions	Seasonal space heating energy efficiency under warmer climate conditions	For space heating, annual energy consumption under colder climate conditions	For space heating, annual energy consumption under warmer climate conditions	Sound power level L _{WA} , outdoor	Low-temperature application	Seasonal space heating energy efficiency class	Rated heat output under average climate conditions	Seasonal space heating energy efficiency under average climate conditions	For space heating, annual energy consumption under average climate conditions	Sound power level L _{WA} , indoor	Rated heat output under colder climate conditions	Rated heat output under warmer climate conditions	Seasonal space heating energy efficiency under colder climate conditions	Seasonal space heating energy efficiency under warmer climate conditions	For space heating, annual energy consumption under colder climate conditions	For space heating, annual energy consumption under warmer climate conditions	Sound power level L _{WA} , outdoor	
		kW	%	kWh	dB	kW	kW	%	%	kWh	kWh	dB	%	%	kWh	dB	kW	kWh	%	%	kWh	kWh	dB	kWh	kWh	%	%	kWh
PUHZ-W50VHA2(-BS)	EHPX-****C	✓	A++	5	127	3180	40	4	5	108	157	3823	1675	61	✓	A++	5	162	2502	40	4	5	138	219	3015	1205	61	
PUHZ-W112VHA(-BS)	EHPX-****C	✓	A++	10	125	6460	40	7	10	105	149	6277	3517	69	✓	A++	10	164	4952	40	7	10	138	216	4816	2438	69	
PUHZ-HW112YHA2(-BS)	EHPX-****C	✓	A++	13	127	8077	40	12	11	114	139	10393	4215	67	✓	A++	13	155	6640	40	12	11	150	208	7937	2840	67	
PUHZ-HW140VHA2(-BS)	EHPX-****C	✓	A++	16	126	10121	40	14	14	113	137	11451	5337	67	✓	A++	16	157	8140	40	14	14	144	188	9058	3920	67	
PUHZ-HW140YHA2(-BS)	EHPX-****C	✓	A++	16	126	10114	40	14	14	113	137	11498	5354	67	✓	A++	16	157	8152	40	14	14	144	187	9059	3948	67	

2.COMBINATION HEATER

		For medium-temperature application														For low-temperature application																													
1	2	3	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
Outdoor unit	Indoor unit	Medium-temperature application														Low-temperature application																													
		Medium-temperature application	Declared load profile	Seasonal space heating energy efficiency class	Water heating energy efficiency class	Rated heat output under average climate conditions	For space heating, annual energy consumption under average climate conditions	For water heating, annual electricity consumption under average climate conditions	Seasonal space heating energy efficiency under average climate conditions	Water heating energy efficiency under average climate conditions	Sound power level L _{WA} , indoor	Work only during off-peak hours	Rated heat output under colder climate conditions	Rated heat output under warmer climate conditions	For space heating, annual energy consumption under colder climate conditions	For space heating, annual energy consumption under warmer climate conditions	For water heating, annual electricity consumption under colder climate conditions	Seasonal space heating energy efficiency under colder climate conditions	Seasonal space heating energy efficiency under warmer climate conditions	Water heating energy efficiency under colder climate conditions	Water heating energy efficiency under warmer climate conditions	Sound power level L _{WA} , outdoor	Low-temperature application	Declared load profile	Seasonal space heating energy efficiency class	Water heating energy efficiency class	Rated heat output under average climate conditions	For space heating, annual energy consumption under average climate conditions	For water heating, annual electricity consumption under average climate conditions	Seasonal space heating energy efficiency under average climate conditions	Water heating energy efficiency under average climate conditions	Sound power level L _{WA} , indoor	Work only during off-peak hours	Rated heat output under colder climate conditions	Rated heat output under warmer climate conditions	For space heating, annual energy consumption under colder climate conditions	For space heating, annual energy consumption under warmer climate conditions	For water heating, annual electricity consumption under colder climate conditions	Seasonal space heating energy efficiency under colder climate conditions	Seasonal space heating energy efficiency under warmer climate conditions	Water heating energy efficiency under colder climate conditions	Water heating energy efficiency under warmer climate conditions	Sound power level L _{WA} , outdoor		
		kW	kWh	kWh	%	%	dB	%	%	kWh	kWh	dB	kWh	kWh	kWh	kWh	%	%	%	%	dB	%	%	dB	%	%	kWh	kWh	kWh	%	%	dB	%	%	kWh	kWh	kWh	%	%	%	%	dB	%	%	dB
PUHZ-W50VHA2(-BS)	EHPT20X-****C2	✓	L	A++	A+	5	3180	817	127	131	40	-	4	5	3823	1675	1079	741	108	157	99	145	61	✓	L	A++	A+	5	2502	817	162	131	40	-	4	5	3015	1205	1079	741	138	219	99	145	61
	EHPT20X-****C(W)	✓	L	A++	A	5	3180	1096	127	99	40	-	4	5	3823	1675	1504	1076	108	157	73	102	61	✓	L	A++	A	5	2502	1096	162	99	40	-	4	5	3015	1205	1504	1076	138	219	73	102	61
PUHZ-W112VHA(-BS)	EHPT20X-****C(W)	✓	L	A++	A	10	6460	1076	125	100	40	-	7	10	6277	3517	1369	1000	105	149	80	110	69	✓	L	A++	A	10	4952	1076	164	100	40	-	7	10	4816	2438	1369	1000	138	216	80	110	69
PUHZ-HW112YHA2(-BS)	EHPT20X-****C(W)	✓	L	A++	A	13	8077	1076	127	100	40	-	12	11	10393	4215	1369	1000	114	139	80	110	67	✓	L	A++	A	13	6640	1076	155	100	40	-	12	11	7937	2840	1369	1000	150	208	80	110	67
PUHZ-HW140VHA2(-BS)	EHPT20X-****C(W)	✓	L	A++	A	16	10121	1145	126	96	40	-	14	14	11451	5337	1377	1083	113	137	80	102	67	✓	L	A++	A	16	8140	1145	157	96	40	-	14	14	9058	3920	1377	1083	144	188	80	102	67
PUHZ-HW140YHA2(-BS)	EHPT20X-****C(W)	✓	L	A++	A	16	10114	1145	126	96	40	-	14	14	11498	5354	1377	1083	113	137	80	102	67	✓	L	A++	A	16	8152	1145	157	96	40	-	14	14	9059	3948	1377	1083	144	187	80	102	67

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUHZ-HW140VHA2(-BS)
	Indoor unit:	EHPT20X-****C(W)
Air-to-water heat pump:	yes	
Water-to-water heat pump:	no	
Brine-to-water heat pump:	no	
Low-temperature heat pump:	no	
Equipped with a supplementary heater:	yes	
Heat pump combination heater:	yes	
Parameters for	medium-temperature application.	
Parameters for	average climate conditions.	

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	15.8	kW	Seasonal space heating energy efficiency	η_s	126	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	14.0	kW	Tj = - 7 °C	COPd	2.01	-
Degradation co-efficient (**)	Cdh	1.00	-	Tj = + 2 °C	COPd	3.23	-
Tj = + 2 °C	Pdh	8.5	kW	Tj = + 7 °C	COPd	4.02	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = +12 °C	COPd	5.33	-
Tj = + 7 °C	Pdh	5.5	kW	Tj = bivalent temperature	COPd	2.01	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = operation limit temperature (***)	COPd	1.92	-
Tj = +12 °C	Pdh	7.3	kW	Operation limit temperature	TOL	-25	°C
Degradation co-efficient (**)	Cdh	0.99	-	Heating water operating limit temperature	WTOL	60	°C
Tj = bivalent temperature	Pdh	14.0	kW	Supplementary heater			
Tj = operation limit temperature (***)	Pdh	13.3	kW	Rated heat output (*)	Psup	2.5	kW
Bivalent temperature	Tbiv	-7	°C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	-10	°C	Power consumption in modes other than active mode			
Off mode				P _{OFF}			
Thermostat-off mode				P _{TO}			
Standby mode				P _{SB}			
Crankcase heater mode				P _{CK}			

Capacity control	variable			Rated air flow rate, outdoors	-	6000	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 67	dBA				
Annual energy consumption	Q _{HE}	10121	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	L			η_{wh}	96	%	
Daily electricity consumption	Q _{elec}	5.200	kWh				
Annual electricity consumption	AEC	1145	kWh				

Contact details

MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS 3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

The identification and signature of the person empowered to bind the supplier:



Tomoyuki MIWA
 General Manager, Quality Assurance Department
 Shizuoka JAPAN

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.
 · Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.
 (*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
 (**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
 (***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUHZ-HW140VHA2(-BS)
	Indoor unit:	EHPT20X-****C(W)
Air-to-water heat pump:	yes	
Water-to-water heat pump:	no	
Brine-to-water heat pump:	no	
Low-temperature heat pump:	no	
Equipped with a supplementary heater:	yes	
Heat pump combination heater:	yes	
Parameters for	low-temperature application.	
Parameters for	average climate conditions.	

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	15.8	kW	Seasonal space heating energy efficiency	η_s	157	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	14.0	kW	Tj = - 7 °C	COPd	2.55	-
Degradation co-efficient (**)	Cdh	1.00	-	Tj = + 2 °C	COPd	4.15	-
Tj = + 2 °C	Pdh	8.5	kW	Tj = + 7 °C	COPd	4.81	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = +12 °C	COPd	5.95	-
Tj = + 7 °C	Pdh	5.5	kW	Tj = bivalent temperature	COPd	2.55	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = operation limit temperature (***)	COPd	2.36	-
Tj = +12 °C	Pdh	7.6	kW	Operation limit temperature	TOL	-25	°C
Degradation co-efficient (**)	Cdh	0.99	-	Heating water operating limit temperature	WTOL	60	°C
Tj = bivalent temperature	Pdh	14.0	kW	Supplementary heater			
Tj = operation limit temperature (***)	Pdh	13.3	kW	Rated heat output (*)	Psup	2.5	kW
Bivalent temperature	Tbiv	-7	°C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	-10	°C	Power consumption in modes other than active mode			
Off mode				P _{OFF}			
Thermostat-off mode				P _{TO}			
Standby mode				P _{SB}			
Crankcase heater mode				P _{CK}			

Capacity control	variable			Rated air flow rate, outdoors	-	6000	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 67	dBA				
Annual energy consumption	Q _{HE}	8140	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	L			η_{wh}	96	%	
Daily electricity consumption	Q _{elec}	5.200	kWh				
Annual electricity consumption	AEC	1145	kWh				

Contact details

MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS 3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

The identification and signature of the person empowered to bind the supplier;

Tomoyuki MIWA
 General Manager, Quality Assurance Department
 Shizuoka JAPAN

The signature is signed in the average climate / medium-temperature section.

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.
 · Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.
 (*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
 (**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
 (***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUHZ-HW140VHA2(-BS)
	Indoor unit:	EHPT20X-****C(W)
Air-to-water heat pump:	yes	
Water-to-water heat pump:	no	
Brine-to-water heat pump:	no	
Low-temperature heat pump:	no	
Equipped with a supplementary heater:	yes	
Heat pump combination heater:	yes	
Parameters for	medium-temperature application.	
Parameters for	colder climate conditions.	

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	13.5	kW	Seasonal space heating energy efficiency	η_s	113	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	8.2	kW	Tj = - 7 °C	COPd	2.70	-
Degradation co-efficient (**)	Cdh	1.00	-	Tj = + 2 °C	COPd	3.40	-
Tj = + 2 °C	Pdh	5.0	kW	Tj = + 7 °C	COPd	4.17	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = +12 °C	COPd	5.35	-
Tj = + 7 °C	Pdh	5.3	kW	Tj = bivalent temperature	COPd	1.50	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = operation limit temperature (***)	COPd	1.42	-
Tj = +12 °C	Pdh	7.4	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	1.50	-
Degradation co-efficient (**)	Cdh	0.99	-	Operation limit temperature	TOL	-25	°C
Tj = bivalent temperature	Pdh	11.0	kW	Heating water operating limit temperature	WTOL	60	°C
Tj = operation limit temperature (***)	Pdh	10.3	kW	Supplementary heater			
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	11.0	kW	Rated heat output (*)	Psup	3.2	kW
Bivalent temperature	Tbiv	-15	°C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	-22	°C	Power consumption in modes other than active mode			
Off mode				P _{OFF}			
Thermostat-off mode				P _{TO}			
Standby mode				P _{SB}			
Crankcase heater mode				P _{CK}			

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	6000	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	40 / 67	dBA				
Annual energy consumption	Q _{HE}	11451	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	L			η_{wh}	80	%	
Daily electricity consumption	Q _{elec}	6.300	kWh				
Annual electricity consumption	AEC	1377	kWh				

Contact details

MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS 3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

The identification and signature of the person empowered to bind the supplier;

Tomoyuki MIWA
General Manager, Quality Assurance Department
Shizuoka JAPAN

The signature is signed in the average climate / medium-temperature section.

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.
· Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.
(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUHZ-HW140VHA2(-BS)
	Indoor unit:	EHPT20X-****C(W)
Air-to-water heat pump:	yes	
Water-to-water heat pump:	no	
Brine-to-water heat pump:	no	
Low-temperature heat pump:	no	
Equipped with a supplementary heater:	yes	
Heat pump combination heater:	yes	
Parameters for	low-temperature application.	
Parameters for	colder climate conditions.	

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	13.5	kW	Seasonal space heating energy efficiency	η_s	144	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	8.2	kW	Tj = - 7 °C	COPd	3.70	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = + 2 °C	COPd	4.25	-
Tj = + 2 °C	Pdh	5.0	kW	Tj = + 7 °C	COPd	5.25	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = +12 °C	COPd	5.95	-
Tj = + 7 °C	Pdh	5.6	kW	Tj = bivalent temperature	COPd	1.79	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = operation limit temperature (***)	COPd	1.50	-
Tj = +12 °C	Pdh	7.6	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	1.79	-
Degradation co-efficient (**)	Cdh	0.99	-	Operation limit temperature	TOL	-25	°C
Tj = bivalent temperature	Pdh	11.0	kW	Heating water operating limit temperature	WTOL	60	°C
Tj = operation limit temperature (***)	Pdh	10.3	kW	Supplementary heater			
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	11.0	kW	Rated heat output (*)	Psup	3.2	kW
Bivalent temperature	Tbiv	-15	°C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	-22	°C	Power consumption in modes other than active mode			
Off mode				P _{OFF}			
Thermostat-off mode				P _{TO}			
Standby mode				P _{SB}			
Crankcase heater mode				P _{CK}			

Capacity control	variable			Rated air flow rate, outdoors	-	6000	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 67	dBA				
Annual energy consumption	Q _{HE}	9058	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	L			η_{wh}	80	%	
Daily electricity consumption	Q _{elec}	6.300	kWh				
Annual electricity consumption	AEC	1377	kWh				

Contact details

MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS 3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

The identification and signature of the person empowered to bind the supplier;

Tomoyuki MIWA
 General Manager, Quality Assurance Department
 Shizuoka JAPAN

The signature is signed in the average climate / medium-temperature section.

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.
 · Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.
 (*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
 (**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
 (***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUHZ-HW140VHA2(-BS)
	Indoor unit:	EHPT20X-****C(W)
Air-to-water heat pump:	yes	
Water-to-water heat pump:	no	
Brine-to-water heat pump:	no	
Low-temperature heat pump:	no	
Equipped with a supplementary heater:	yes	
Heat pump combination heater:	yes	
Parameters for	medium-temperature application.	
Parameters for	warmer climate conditions.	

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	14.0	kW	Seasonal space heating energy efficiency	η_s	137	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	-	kW	Tj = - 7 °C	COPd	-	-
Degradation co-efficient (**)	Cdh	-	-	Tj = + 2 °C	COPd	2.14	-
Tj = + 2 °C	Pdh	14.0	kW	Tj = + 7 °C	COPd	3.00	-
Degradation co-efficient (**)	Cdh	1.00	-	Tj = +12 °C	COPd	4.50	-
Tj = + 7 °C	Pdh	9.0	kW	Tj = bivalent temperature	COPd	2.14	-
Degradation co-efficient (**)	Cdh	1.00	-	Tj = operation limit temperature (***)	COPd	2.14	-
Tj = +12 °C	Pdh	7.2	kW	Operation limit temperature	TOL	-25	°C
Degradation co-efficient (**)	Cdh	0.99	-	Heating water operating limit temperature	WTOL	60	°C
Tj = bivalent temperature	Pdh	14.0	kW	Supplementary heater			
Tj = operation limit temperature (***)	Pdh	14.0	kW	Rated heat output (*)	Psup	0.0	kW
Bivalent temperature	Tbiv	2	°C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	2	°C	Power consumption in modes other than active mode			
Off mode				P _{OFF}			
Thermostat-off mode				P _{TO}			
Standby mode				P _{SB}			
Crankcase heater mode				P _{CK}			

Other items	Capacity control	variable	Rated air flow rate, outdoors	-	6000	m ³ /h
	Sound power level, indoors/outdoors	L _{WA} 40 / 67				dBA
	Annual energy consumption	Q _{HE} 5337				kWh

For heat pump combination heater:						
Declared load profile	L			Water heating energy efficiency	η_{wh}	102 %
Daily electricity consumption	Q _{elec}	4.900	kWh			
Annual electricity consumption	AEC	1083	kWh			

Contact details

MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS 3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

The identification and signature of the person empowered to bind the supplier;

Tomoyuki MIWA
General Manager, Quality Assurance Department
Shizuoka JAPAN

The signature is signed in the average climate / medium-temperature section.

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.
· Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.
(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUHZ-HW140VHA2(-BS)
	Indoor unit:	EHPT20X-****C(W)
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	14.0	kW	Seasonal space heating energy efficiency	η_s	188	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	-	kW	Tj = - 7 °C	COPd	-	-
Degradation co-efficient (**)	Cdh	-	-	Tj = + 2 °C	COPd	3.11	-
Tj = + 2 °C	Pdh	14.0	kW	Tj = + 7 °C	COPd	4.60	-
Degradation co-efficient (**)	Cdh	1.00	-	Tj = +12 °C	COPd	5.50	-
Tj = + 7 °C	Pdh	9.0	kW	Tj = bivalent temperature	COPd	3.11	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = operation limit temperature (***)	COPd	3.11	-
Tj = +12 °C	Pdh	7.5	kW	Operation limit temperature	TOL	-25	°C
Degradation co-efficient (**)	Cdh	0.99	-	Heating water operating limit temperature	WTOL	60	°C
Tj = bivalent temperature	Pdh	14.0	kW	Supplementary heater			
Tj = operation limit temperature (***)	Pdh	14.0	kW	Rated heat output (*)	Psup	0.0	kW
Bivalent temperature	Tbiv	2	°C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	2	°C	Power consumption in modes other than active mode			
Off mode				P _{OFF}			
Thermostat-off mode				P _{TO}			
Standby mode				P _{SB}			
Crankcase heater mode				P _{CK}			

Capacity control	variable			Rated air flow rate, outdoors	-	6000	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 67	dBA				
Annual energy consumption	Q _{HE}	3920	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	L			η_{wh}	102	%	
Daily electricity consumption	Q _{elec}	4.900	kWh				
Annual electricity consumption	AEC	1083	kWh				

Contact details

MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS 3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

The identification and signature of the person empowered to bind the supplier;

Tomoyuki MIWA
 General Manager, Quality Assurance Department
 Shizuoka JAPAN

The signature is signed in the average climate / medium-temperature section.

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.
 · Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.
 (*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
 (**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
 (***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.