





ENERG
енергия · ενεργεια





Indoor unit E*ST17/20D-*M2/6/9*D
Outdoor unit PXZ-5F85VG

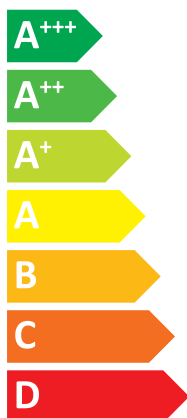

A+

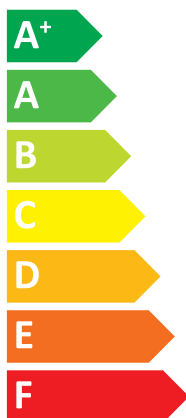

A+

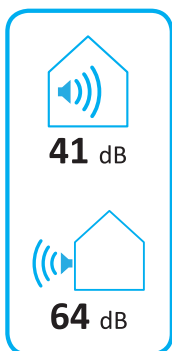

2019

811/2013

WG79A900H01

ISPACE HEATER			For medium-temperature application																For low-temperature application																				
1			2			3	6	8	11	9	13	15	16	21	22	17	18	25	4	6	8	11	9	13	15	16	21	22	17	18	25								
Outdoor unit			Medium-temperature application																Low-temperature application																				
			Second space heating energy efficiency class																Second space heating energy efficiency class																				
			Rated heat output under average climate conditions																Rated heat output under average climate conditions																				
			Second space heating energy efficiency / under average climate conditions																Second space heating energy efficiency / under average climate conditions																				
			kW	%	kWh	dB	kW	kWh	%	kWh	dB	kW	%	kWh	kWh	dB	kW	%	kWh	dB	kW	kWh	%	kWh	dB	kW	kWh	%	kWh	dB									
PXZ-SF85VG	EHS-D-****D ERSD-****D	✓ ✓	A+ A+	7 7	111 111	4844 4844	41 41	5 5	7 7	93 150	5331 5331	2342 2342	64 64	✓ ✓	A++ A++	7 7	157 157	3515 3515	41 41	7 7	8 8	126 126	208 208	5197 5197	1971 1971	64 64	✓ ✓	A++ A++	7 7	157 157	3515 3515	41 41	7 7	8 8	126 126	208 208	5197 5197	1971 1971	64 64

COMBINATION HEATER			For medium-temperature application																									For low-temperature application																									
Outdoor unit		Indoor unit		Medium-temperature application																									Low-temperature application																								
1	2	3	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25								
		Medium-temperature application																									Low-temperature application																										
		Declined floor profile																									Declined floor profile																										
		Seasonal space heating energy efficiency class																									Seasonal space heating energy efficiency class																										
		Water heating energy efficiency class																									Water heating energy efficiency class																										
		Rated heat output under average outdoor climate conditions																									Rated heat output under average outdoor climate conditions																										
		For space heating, annual energy consumption under average climate conditions																									For space heating, annual energy consumption under average climate conditions																										
		For water heating, annual energy consumption under average climate conditions																									For water heating, annual energy consumption under average climate conditions																										
		Seasonal space heating energy efficiency under average outdoor climate conditions																									Seasonal space heating energy efficiency under average outdoor climate conditions																										
		Water heating energy efficiency under average climate conditions																									Water heating energy efficiency under average climate conditions																										
		Sound power level L _w , indoor																									Sound power level L _w , indoor																										
		Work only during off-peak hours																									Work only during off-peak hours																										
		Rated heat output under outdoor climate conditions																									Rated heat output under outdoor climate conditions																										
		For space heating, annual energy consumption under average outdoor climate conditions																									For space heating, annual energy consumption under average outdoor climate conditions																										
		For water heating, annual energy consumption under average outdoor climate conditions																									For water heating, annual energy consumption under average outdoor climate conditions																										
		Seasonal space heating energy efficiency under average outdoor climate conditions																									Seasonal space heating energy efficiency under average outdoor climate conditions																										
		Water heating energy efficiency under average outdoor climate conditions																									Water heating energy efficiency under average outdoor climate conditions																										
		Sound power level L _w , outdoor																									Sound power level L _w , outdoor																										
		Low-temperature application																									Low-temperature application																										
		Declined floor profile																									Declined floor profile																										
		Seasonal space heating energy efficiency class																									Seasonal space heating energy efficiency class																										
		Water heating energy efficiency class																									Water heating energy efficiency class																										
		Rated heat output under average outdoor climate conditions																									Rated heat output under average outdoor climate conditions																										
		For space heating, annual energy consumption under average outdoor climate conditions																									For space heating, annual energy consumption under average outdoor climate conditions																										
		For water heating, annual energy consumption under average outdoor climate conditions																									For water heating, annual energy consumption under average outdoor climate conditions																										
		Seasonal space heating energy efficiency under average outdoor climate conditions																									Seasonal space heating energy efficiency under average outdoor climate conditions																										
		Water heating energy efficiency under average outdoor climate conditions																									Water heating energy efficiency under average outdoor climate conditions																										
		Sound power level L _w , indoor																									Sound power level L _w , indoor																										
		Work only during off-peak hours																									Work only during off-peak hours																										
		Rated heat output under outdoor climate conditions																									Rated heat output under outdoor climate conditions																										
		For space heating, annual energy consumption under average outdoor climate conditions																									For space heating, annual energy consumption under average outdoor climate conditions																										
		For water heating, annual energy consumption under average outdoor climate conditions																									For water heating, annual energy consumption under average outdoor climate conditions																										
		Seasonal space heating energy efficiency under average outdoor climate conditions																									Seasonal space heating energy efficiency under average outdoor climate conditions																										
		Water heating energy efficiency under average outdoor climate conditions																									Water heating energy efficiency under average outdoor climate conditions																										
		Sound power level L _w , outdoor																									Sound power level L _w , outdoor																										

PXZ-5F85VG		EHST17D-****D	✓	L	A+	A+	7	4844	908	111	121	41	-	-	5	7	5331	2342	907	839	93	159	122	132	64	✓	L	A++	A+	7	3515	908	157	121	41	-	7	8	5197	1971	907	839	126	208	122	132	64
		ERST17D-****D	✓	L	A+	A+	7	4844	908	111	121	41	-	-	5	7	5332	2342	907	839	93	159	122	132	64	✓	L	A++	A+	7	3515	908	157	121	41	-	7	8	5197	1971	907	839	126	208	122	132	64
		EHST20D-****D	✓	L	A+	A+	7	4844	927	111	123	41	-	-	5	7	5331	2342	977	856	93	159	120	134	64	✓	L	A++	A+	7	3515	927	157	123	41	-	7	8	5197	1971	977	856	126	208	120	134	64
		ERST20D-****D	✓	L	A+	A+	7	4844	927	111	123	41	-	-	5	7	5332	2342	977	856	93	159	120	134	64	✓	L	A++	A+	7	3515	927	157	123	41	-	7	8	5197	1971	977	856	126	208	120	134	64
		EHST30D-****D	✓	XL	A	A	7	4844	1628	111	110	41	-	-	5	7	5331	2342	1652	1462	93	159	108	124	64	✓	XL	A++	A	7	3515	1628	157	110	41	-	7	8	5197	1971	1652	1462	126	208	108	124	64
		ERST30D-****D	✓	XL	A	A	7	4844	1628	111	110	41	-	-	5	7	5332	2342	1652	1462	93	159	108	124	64	✓	XL	A++	A	7	3515	1628	157	110	41	-	7	8	5197	1971	1652	1462	126	208	108	124	64

	English	Deutsch	Franglais	Italiano	Español
	Nederlands	Svenska	Dansk	Português	Ελληνικά
	suomi	Cestina	Български	Polski	Ελληνικά
	Outdoor unit	Außengerät	unité extérieure	unidad exterior	Εξωτερική μονάδα
	1 buiteneenh	Utomhusenhet	Удлендс ентред	unidad exterior	-
	Ulkokotuko	Vanhoviin julkonika	Външно труп	jednostka zewnętrzna	-
	Indoor unit	Innengerät	unité intérieure	unidad interior	Εσωτερική μονάδα
	2 binnenunit	Innhusenhet	Внутреннее труп	jednostka wewnętrzna	-
	Sisäyksiko	Värfim julkonika	Внутреннее труп	jednostka wewnętrzna	-
	Medium-temperature application	Mitttemperatur anwendung	Тарпаратуро а мумеме температура	temperatura mediana	la aplicación de media temperatura
	3 middletemperatuur-toepassing	Middeltemperatuurtoepassing	Тарпаратуро а мумеме температура	temperatura mediana	la aplicación de media temperatura
	keskitemperatuur sovellus	Middeltemperatuurtoepassing	Тарпаратуро а мумеме температура	temperatura mediana	la aplicación de media temperatura
	4 laagtemperatuur-toepassing	Nedertemperatuurtoepassing	Тарпаратуро а мумеме температура	temperatura mediana	la aplicación de media temperatura
	madalamtemperatuur sovellus	Nedertemperatuurtoepassing	Тарпаратуро а мумеме температура	temperatura mediana	la aplicación de media temperatura
	Declared load profile	Aangegeven Lastprofiel	Профил де сарга декларат	Perfil de carga declarado	Peril de carga declarado
	5 Oorgegeven capaciteitsprofiel	Aangegeven Lastprofiel	Профил де сарга декларат	Perfil de carga declarado	Peril de carga declarado
	Imoilehtu kuormitusprofiili	Deklaarahtu zähtöyhtu profiili	Профил де сарга декларат	Perfil de carga declarado	Peril de carga declarado
	6 de seizoensgebonden energie-efficiëntieklasse voor ruimteverwarming	de seizoensgebonden energie-efficiëntieklasse voor ruimteverwarming	la classe d'efficacité énergétique saisonnière pour le chauffage des locaux	la classe de eficiencia energética estacional de calefacción	η τάξη ενεργειακής απόδοσης της εποχιακής θερμότητας χώρου
	7 Waier heating energy efficiency class	de energie-efficiëntieklasse voor waierverwarming	la classe d'efficacité énergétique pour le chauffage de l'eau	la clase de eficiencia energética del calentamiento del agua	η τάξη ενεργειακής απόδοσης της εποχιακής θερμότητας χώρου
	8 Rated heat output under average climate conditions	Rated heat output under average climate conditions	la puissance thermique nominale dans les conditions climatiques moyennes	la potencia calorífica nominal en condiciones climáticas medias	η ονομαστική θερμική ισχύς υπό μέτριες κλιματικές συνθήκες
	9 voor ruimteverwarming, het jaarlijkse energieverbruik onder gemiddelde klimaatomstandigheden	voor ruimteverwarming, het jaarlijkse energieverbruik onder gemiddelde klimaatomstandigheden	la consommation annuelle d'énergie (en conditions climatiques moyennes)	el consumo anual de energía (en condiciones climáticas medias)	η ετήσια κατανάλωση ενέργειας υπό μέτριες κλιματικές συνθήκες
	10 voor waierverwarming, het jaarlijkse elektriciteitsverbruik onder gemiddelde klimaatomstandigheden	voor waierverwarming, het jaarlijkse elektriciteitsverbruik onder gemiddelde klimaatomstandigheden	la consommation annuelle d'électricité (dans les conditions climatiques moyennes)	el consumo anual de electricidad (en condiciones climáticas medias)	η ετήσια κατανάλωση ηλεκτρικής ενέργειας υπό μέτριες κλιματικές συνθήκες
	11 de seizoensgebonden energie-efficiëntie voor ruimteverwarming onder gemiddelde klimaatomstandigheden	de seizoensgebonden energie-efficiëntie voor ruimteverwarming onder gemiddelde klimaatomstandigheden	la puissance thermique nominale dans les conditions climatiques moyennes	la potencia calorífica nominal en condiciones climáticas medias	η ονομαστική θερμική ισχύς υπό μέτριες κλιματικές συνθήκες
	12 de energie-efficiëntie voor waierverwarming onder gemiddelde klimaatomstandigheden	de energie-efficiëntie voor waierverwarming onder gemiddelde klimaatomstandigheden	la consommation annuelle d'énergie (en conditions climatiques moyennes)	el consumo anual de energía (en condiciones climáticas medias)	η ετήσια κατανάλωση ενέργειας υπό μέτριες κλιματικές συνθήκες
	13 Sound power level L_{wA} indoor	het geluidsvormingsniveau L_{wA} binnen	le niveau de puissance acoustique L_{wA} à l'intérieur	el nivel de potencia sonora L_{wA} al interior	el nivel de potencia acústica L_{wA} en interiores
	14 binnenluidingsniveau L_{wA} binnen	het geluidsvormingsniveau L_{wA} binnen	le niveau de puissance acoustique L_{wA} à l'intérieur	el nivel de potencia sonora L_{wA} al interior	el nivel de potencia acústica L_{wA} en interiores
	15 Rated heat output under colder climate conditions	Rated heat output under colder climate conditions	la puissance thermique nominale dans les conditions climatiques plus froides	la potencia calorífica nominal en condiciones climáticas más frías	η ονομαστική θερμική ισχύς υπό ψυχρότερες κλιματικές συνθήκες
	16 Rated heat output under warmer climate conditions	Rated heat output under warmer climate conditions	la puissance thermique nominale dans les conditions climatiques plus chaudes	la potencia calorífica nominal en condiciones climáticas más calidas	η ονομαστική θερμική ισχύς υπό θερμότερες κλιματικές συνθήκες
	17 voor ruimteverwarming, het jaarlijkse energieverbruik onder koude klimaatomstandigheden	voor ruimteverwarming, het jaarlijkse energieverbruik onder koude klimaatomstandigheden	la consommation annuelle d'énergie (en conditions climatiques moyennes)	el consumo anual de energía (en condiciones climáticas medias)	η ετήσια κατανάλωση ενέργειας υπό ψυχρότερες κλιματικές συνθήκες
	18 voor ruimteverwarming, het jaarlijkse energieverbruik onder warme klimaatomstandigheden	voor ruimteverwarming, het jaarlijkse energieverbruik onder warme klimaatomstandigheden	la consommation annuelle d'énergie (en conditions climatiques moyennes)	el consumo anual de energía (en condiciones climáticas medias)	η ετήσια κατανάλωση ενέργειας υπό θερμότερες κλιματικές συνθήκες
	19 voor waierverwarming, het jaarlijkse elektriciteitsverbruik onder koude klimaatomstandigheden	voor waierverwarming, het jaarlijkse elektriciteitsverbruik onder koude klimaatomstandigheden	la consommation annuelle d'électricité (dans les conditions climatiques plus froides)	el consumo anual de electricidad (en condiciones climáticas más frías)	η ετήσια κατανάλωση ηλεκτρικής ενέργειας υπό ψυχρότερες κλιματικές συνθήκες
	20 voor waierverwarming, het jaarlijkse elektriciteitsverbruik onder warme klimaatomstandigheden	voor waierverwarming, het jaarlijkse elektriciteitsverbruik onder warme klimaatomstandigheden	la consommation annuelle d'électricité (dans les conditions climatiques plus chaudes)	el consumo anual de electricidad (en condiciones climáticas más calidas)	η ετήσια κατανάλωση ηλεκτρικής ενέργειας υπό θερμότερες κλιματικές συνθήκες
	21 de seizoensgebonden energie-efficiëntie voor ruimteverwarming onder koude klimaatomstandigheden	de seizoensgebonden energie-efficiëntie voor ruimteverwarming onder koude klimaatomstandigheden	la puissance thermique nominale dans les conditions climatiques plus froides	la potencia calorífica nominal en condiciones climáticas más frías	η ονομαστική θερμική ισχύς υπό ψυχρότερες κλιματικές συνθήκες
	22 de seizoensgebonden energie-efficiëntie voor ruimteverwarming onder warme klimaatomstandigheden	de seizoensgebonden energie-efficiëntie voor ruimteverwarming onder warme klimaatomstandigheden	la puissance thermique nominale dans les conditions climatiques plus chaudes	la potencia calorífica nominal en condiciones climáticas más calidas	η ονομαστική θερμική ισχύς υπό θερμότερες κλιματικές συνθήκες
	23 de energie-efficiëntie voor waierverwarming onder koude klimaatomstandigheden	de energie-efficiëntie voor waierverwarming onder koude klimaatomstandigheden	la consommation annuelle d'énergie (en conditions climatiques moyennes)	el consumo anual de energía (en condiciones climáticas medias)	η ετήσια κατανάλωση ενέργειας υπό ψυχρότερες κλιματικές συνθήκες
	24 de energie-efficiëntie voor waierverwarming onder warme klimaatomstandigheden	de energie-efficiëntie voor waierverwarming onder warme klimaatomstandigheden	la consommation annuelle d'énergie (en conditions climatiques moyennes)	el consumo anual de energía (en condiciones climáticas medias)	η ετήσια κατανάλωση ενέργειας υπό θερμότερες κλιματικές συνθήκες
	25 Sound power level L_{wA} outdoor	het geluidsvormingsniveau L_{wA} buiten	le niveau de puissance acoustique L_{wA} à l'extérieur	el nivel de potencia sonora L_{wA} al exterior	el nivel de potencia acústica L_{wA} en exteriores
	26 binnenluidingsniveau L_{wA} binnen	het geluidsvormingsniveau L_{wA} binnen	le niveau de puissance acoustique L_{wA} à l'intérieur	el nivel de potencia sonora L_{wA} al interior	el nivel de potencia acústica L_{wA} en interiores

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-5F85VG
	Indoor unit:	EHST17D-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.7	kW	Seasonal space heating energy efficiency	η_s	111	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	5.9	kW	Tj = - 7 °C	COPd	1.40	-
Degradation co-efficient (**)	Cdh	1.00	-				
Tj = + 2 °C	Pdh	3.7	kW	Tj = + 2 °C	COPd	3.07	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 7 °C	Pdh	2.4	kW	Tj = + 7 °C	COPd	3.93	-
Degradation co-efficient (**)	Cdh	0.98	-				
Tj = +12 °C	Pdh	2.1	kW	Tj = +12 °C	COPd	4.48	-
Degradation co-efficient (**)	Cdh	0.97	-				
Tj = bivalent temperature	Pdh	5.9	kW	Tj = bivalent temperature	COPd	1.40	-
Tj = operation limit temperature (***)	Pdh	5.1	kW	Tj = operation limit temperature (***)	COPd	1.21	-
Bivalent temperature	Tbiv	-7	°C	Operation limit temperature	TOL	-20	°C
Reference design conditions for space heating	Tdesignh	-10	°C	Heating water operating limit temperature	WTOL	55	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	Psup	1.6	kW
Thermostat-off mode	P _{TO}	0.015	kW	Type of energy input	Electrical		
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items

Capacity control	variable			Rated air flow rate, outdoors	-	3720	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 64	dBA				
Annual energy consumption	Q _{HE}	4844	kWh				

For heat pump combination heater:

Declared load profile	L			Water heating energy efficiency	η_{wh}	121	%
Daily electricity consumption	Q _{elec}	4.130	kWh				
Annual electricity consumption	AEC	908	kWh				

Contact details

MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS

3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

The identification and signature of the person empowered to bind the supplier:

Yasutaka MURAKAMI
 Section Manager, Quality Control Section
 Shizuoka JAPAN

Yasutaka Murakami

* Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

* Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating

Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-5F85VG
	Indoor unit:	EHST17D-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.8	kW	Seasonal space heating energy efficiency	η_s	157	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	6.0	kW	Tj = - 7 °C	COPd	2.80	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 2 °C	Pdh	4.0	kW	Tj = + 2 °C	COPd	4.29	-
Degradation co-efficient (**)	Cdh	0.98	-				
Tj = + 7 °C	Pdh	2.6	kW	Tj = + 7 °C	COPd	4.72	-
Degradation co-efficient (**)	Cdh	0.97	-				
Tj = +12 °C	Pdh	2.3	kW	Tj = +12 °C	COPd	4.33	-
Degradation co-efficient (**)	Cdh	0.97	-				
Tj = bivalent temperature	Pdh	6.0	kW	Tj = bivalent temperature	COPd	2.80	-
Tj = operation limit temperature (****)	Pdh	6.8	kW	Tj = operation limit temperature (****)	COPd	2.50	-
Bivalent temperature	Tbiv	-7	°C	Operation limit temperature	TOL	-20	°C
Reference design conditions for space heating	Tdesignh	-10	°C	Heating water operating limit temperature	WTOL	55	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	Psup	0.0	kW
Thermostat-off mode	P _{TO}	0.015	kW	Type of energy input	Electrical		
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items

Capacity control	variable			Rated air flow rate, outdoors	-	3720	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 64	dBA				
Annual energy consumption	Q _{HE}	3515	kWh				

For heat pump combination heater:

Declared load profile	L			Water heating energy efficiency	η_{wh}	121	%
Daily electricity consumption	Qelec	4.130	kWh				
Annual electricity consumption	AEC	908	kWh				

Contact details

MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS

3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

The identification and signature of the person empowered to bind the supplier;

Yasutaka MURAKAMI

The signature is signed in the average climate / medium-temperature section.

Section Manager, Quality Control Section

Shizuoka JAPAN

* Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

* Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-5F85VG
	Indoor unit:	EHST17D-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	5.2	kW	Seasonal space heating energy efficiency	η_s	93	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	3.2	kW	Tj = - 7 °C	COPd	1.91	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = + 2 °C	COPd	2.96	-
Tj = + 2 °C	Pdh	1.9	kW	Tj = + 7 °C	COPd	5.42	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = +12 °C	COPd	6.03	-
Tj = + 7 °C	Pdh	2.4	kW	Tj = bivalent temperature	COPd	2.06	-
Degradation co-efficient (**)	Cdh	0.97	-	Tj = operation limit temperature (***)	COPd	1.00	-
Tj = +12 °C	Pdh	2.3	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	1.00	-
Degradation co-efficient (**)	Cdh	0.96	-	Operation limit temperature	TOL	-20	°C
Tj = bivalent temperature	Pdh	3.2	kW	Heating water operating limit temperature	WTOL	55	°C
Tj = operation limit temperature (***)	Pdh	3.8	kW	Supplementary heater			
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	4.3	kW	Rated heat output (*)	Psup	5.2	kW
Bivalent temperature	Tbiv	-7	°C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	-22	°C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.015	kW				
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				
Other items							
Capacity control	variable			Rated air flow rate, outdoors	-	3720	m³/h
Sound power level, indoors/outdoors	L _{WA}	41 / 64	dBA				
Annual energy consumption	Q _{HE}	5331	kWh				

For heat pump combination heater:							
Declared load profile	L			Water heating energy efficiency	η_{wh}	122	%
Daily electricity consumption	Qelec	4.120	kWh				
Annual electricity consumption	AEC	907	kWh				

Contact details							
MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS				3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan			
The identification and signature of the person empowered to bind the supplier;				Yasutaka MURAKAMI			
The signature is signed in the average climate / medium-temperature section.				Section Manager, Quality Control Section			
				Shizuoka JAPAN			

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-5F85VG
	Indoor unit:	EHST17D-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.8	kW	Seasonal space heating energy efficiency	η_s	126	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	4.1	kW	Tj = - 7 °C	COPd	2.81	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 2 °C	Pdh	2.5	kW	Tj = + 2 °C	COPd	3.71	-
Degradation co-efficient (**)	Cdh	0.98	-				
Tj = + 7 °C	Pdh	2.6	kW	Tj = + 7 °C	COPd	6.27	-
Degradation co-efficient (**)	Cdh	0.96	-				
Tj = +12 °C	Pdh	2.3	kW	Tj = +12 °C	COPd	6.54	-
Degradation co-efficient (**)	Cdh	0.96	-				
Tj = bivalent temperature	Pdh	4.1	kW	Tj = bivalent temperature	COPd	2.91	-
Tj = operation limit temperature (***)	Pdh	5.2	kW	Tj = operation limit temperature (***)	COPd	1.73	-
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	5.6	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	2.13	-
Bivalent temperature	Tbiv	-7	°C	Operation limit temperature	TOL	-20	°C
Reference design conditions for space heating	Tdesignh	-22	°C	Heating water operating limit temperature	WTOL	55	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	6.8	kW
Thermostat-off mode	P _{TO}	0.015	kW	Type of energy input	Electrical		
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				
Other items							
Capacity control	variable			Rated air flow rate, outdoors	-	3720	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 64	dBA				
Annual energy consumption	Q _{HE}	5197	kWh				

For heat pump combination heater:

Declared load profile	L			Water heating energy efficiency	η_{wh}	122	%
Daily electricity consumption	Q _{elec}	4.120	kWh				
Annual electricity consumption	AEC	907	kWh				

Contact details

MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS

3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

The identification and signature of the person empowered to bind the supplier;

Yasutaka MURAKAMI

The signature is signed in the average climate / medium-temperature section.

Section Manager, Quality Control Section
Shizuoka JAPAN

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-5F85VG
	Indoor unit:	EHST17D-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.1	kW	Seasonal space heating energy efficiency	η_s	159	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	-	kW	Tj = - 7 °C	COPd	-	-
Degradation co-efficient (**)	Cdh	-	-				
Tj = + 2 °C	Pdh	7.1	kW	Tj = + 2 °C	COPd	1.84	-
Degradation co-efficient (**)	Cdh	1.00	-				
Tj = + 7 °C	Pdh	4.6	kW	Tj = + 7 °C	COPd	3.74	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = +12 °C	Pdh	2.0	kW	Tj = +12 °C	COPd	5.26	-
Degradation co-efficient (**)	Cdh	0.96	-				
Tj = bivalent temperature	Pdh	7.1	kW	Tj = bivalent temperature	COPd	1.84	-
Tj = operation limit temperature (***)	Pdh	7.1	kW	Tj = operation limit temperature (***)	COPd	1.84	-
Bivalent temperature	Tbiv	2	°C	Operation limit temperature	TOL	-20	°C
Reference design conditions for space heating	Tdesignh	2	°C	Heating water operating limit temperature	WTOL	55	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	Psup	0.0	kW
Thermostat-off mode	P _{TO}	0.015	kW	Type of energy input	Electrical		
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				
Other items							
Capacity control	variable			Rated air flow rate, outdoors	-	3720	m³/h
Sound power level, indoors/outdoors	L _{WA}	41 / 64	dBA				
Annual energy consumption	Q _{HE}	2342	kWh				

For heat pump combination heater:

Declared load profile	L			Water heating energy efficiency	η_{wh}	132	%
Daily electricity consumption	Q _{elec}	3.820	kWh				
Annual electricity consumption	AEC	839	kWh				

Contact details

mitsubishi electric corporation shizuoka works

3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

The identification and signature of the person empowered to bind the supplier;

Yasutaka MURAKAMI

The signature is signed in the average climate / medium-temperature section.

Section Manager, Quality Control Section
Shizuoka JAPAN

* Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

* Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-5F85VG
	Indoor unit:	EHST17D-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.8	kW	Seasonal space heating energy efficiency	η_s	208	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	Pdh	-	kW	Tj = -7 °C	COPd	-	-
Degradation co-efficient (**)	Cdh	-	-				
Tj = +2 °C	Pdh	7.8	kW	Tj = +2 °C	COPd	3.00	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = +7 °C	Pdh	5.0	kW	Tj = +7 °C	COPd	5.22	-
Degradation co-efficient (**)	Cdh	0.98	-				
Tj = +12 °C	Pdh	2.2	kW	Tj = +12 °C	COPd	6.29	-
Degradation co-efficient (**)	Cdh	0.96	-				
Tj = bivalent temperature	Pdh	7.8	kW	Tj = bivalent temperature	COPd	3.00	-
Tj = operation limit temperature (***)	Pdh	7.8	kW	Tj = operation limit temperature (***)	COPd	3.00	-
Bivalent temperature	Tbiv	2	°C	Operation limit temperature	TOL	-20	°C
Reference design conditions for space heating	Tdesignh	2	°C	Heating water operating limit temperature	WTOL	55	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.015	kW	Type of energy input	Electrical		
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items

Capacity control	variable			Rated air flow rate, outdoors	-	3720	m³/h
Sound power level, indoors/outdoors	L _{WA}	41 / 64	dBA				
Annual energy consumption	Q _{HE}	1971	kWh				

For heat pump combination heater:

Declared load profile	L			Water heating energy efficiency	η_{wh}	132	%
Daily electricity consumption	Q _{elec}	3.820	kWh				
Annual electricity consumption	AEC	839	kWh				

Contact details

MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS

3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

The identification and signature of the person empowered to bind the supplier;

Yasutaka MURAKAMI

The signature is signed in the average climate / medium-temperature section.

Section Manager, Quality Control Section

Shizuoka JAPAN

* Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

* Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-5F85VG
	Indoor unit:	EHST20D-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.7	kW	Seasonal space heating energy efficiency	η_s	111	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	5.9	kW	Tj = - 7 °C	COPd	1.40	-
Degradation co-efficient (**)	Cdh	1.00	-				
Tj = + 2 °C	Pdh	3.7	kW	Tj = + 2 °C	COPd	3.07	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 7 °C	Pdh	2.4	kW	Tj = + 7 °C	COPd	3.93	-
Degradation co-efficient (**)	Cdh	0.98	-				
Tj = +12 °C	Pdh	2.1	kW	Tj = +12 °C	COPd	4.48	-
Degradation co-efficient (**)	Cdh	0.97	-				
Tj = bivalent temperature	Pdh	5.9	kW	Tj = bivalent temperature	COPd	1.40	-
Tj = operation limit temperature (***)	Pdh	5.1	kW	Tj = operation limit temperature (***)	COPd	1.21	-
Bivalent temperature	Tbiv	-7	°C	Operation limit temperature	TOL	-20	°C
Reference design conditions for space heating	Tdesignh	-10	°C	Heating water operating limit temperature	WTOL	55	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	Psup	1.6	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P _{CK}	0.000	kW				
Other items							
Capacity control	variable			Rated air flow rate, outdoors	-	3720	m³/h
Sound power level, indoors/outdoors	L _{WA}	41 / 64	dBA				
Annual energy consumption	Q _{HE}	4844	kWh				
For heat pump combination heater:							
Declared load profile	L			Water heating energy efficiency	η_{wh}	123	%
Daily electricity consumption	Qelec	4.210	kWh				
Annual electricity consumption	AEC	927	kWh				

Contact details

MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS

3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

The identification and signature of the person empowered to bind the supplier:

Yasutaka MURAKAMI
 Section Manager, Quality Control Section
 Shizuoka JAPAN

Yasutaka Murakami

* Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

* Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating

Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-5F85VG
	Indoor unit:	EHST20D-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.8	kW	Seasonal space heating energy efficiency	η_s	157	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	6.0	kW	Tj = - 7 °C	COPd	2.80	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = + 2 °C	COPd	4.29	-
Tj = + 2 °C	Pdh	4.0	kW	Tj = + 7 °C	COPd	4.72	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = +12 °C	COPd	4.33	-
Tj = + 7 °C	Pdh	2.6	kW	Tj = bivalent temperature	COPd	2.80	-
Degradation co-efficient (**)	Cdh	0.97	-	Tj = operation limit temperature (***)	COPd	2.50	-
Tj = +12 °C	Pdh	2.3	kW	Operation limit temperature	TOL	-20	°C
Degradation co-efficient (**)	Cdh	0.97	-	Heating water operating limit temperature	WTOL	55	°C
Tj = bivalent temperature	Pdh	6.0	kW	Supplementary heater			
Tj = operation limit temperature (***)	Pdh	6.8	kW	Rated heat output (*)	Psup	0.0	kW
Bivalent temperature	Tbiv	-7	°C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	-10	°C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.015	kW				
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items

Capacity control	variable			Rated air flow rate, outdoors	-	3720	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 64	dBA				
Annual energy consumption	Q _{HE}	3515	kWh				

For heat pump combination heater:

Declared load profile	L			Water heating energy efficiency	η_{wh}	123	%
Daily electricity consumption	Q _{elec}	4.210	kWh				
Annual electricity consumption	AEC	927	kWh				

Contact details

MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS

3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

The identification and signature of the person empowered to bind the supplier;

Yasutaka MURAKAMI

The signature is signed in the average climate / medium-temperature section.

Section Manager, Quality Control Section

Shizuoka JAPAN

* Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

* Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

 (*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(T_j).

 (**) If C_{dh} is not determined by measurement then the default degradation coefficient is C_{dh} = 0.9.

 (***) If the declared TOL is lower than the T_{designh} of the considered climate then the outdoor dry bulb temperature T_j is equal to T_{designh}.

This information is based on EU regulation No 811/2013 and No 813/2013.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-5F85VG
	Indoor unit:	EHST20D-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	5.2	kW	Seasonal space heating energy efficiency	η_s	93	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	Pdh	3.2	kW	Tj = -7 °C	COPd	1.91	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = +2 °C	COPd	2.96	-
Tj = +2 °C	Pdh	1.9	kW	Tj = +7 °C	COPd	5.42	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = +12 °C	COPd	6.03	-
Tj = +7 °C	Pdh	2.4	kW	Tj = bivalent temperature	COPd	2.06	-
Degradation co-efficient (**)	Cdh	0.97	-	Tj = operation limit temperature (***)	COPd	1.00	-
Tj = +12 °C	Pdh	2.3	kW	Tj = -15 °C (if TOL < -20 °C)	COPd	1.00	-
Degradation co-efficient (**)	Cdh	0.96	-	Operation limit temperature	TOL	-20	°C
Tj = bivalent temperature	Pdh	3.2	kW	Heating water operating limit temperature	WTOL	55	°C
Tj = operation limit temperature (***)	Pdh	3.8	kW	Supplementary heater			
Tj = -15 °C (if TOL < -20 °C)	Pdh	4.3	kW	Rated heat output (*)	Psup	5.2	kW
Bivalent temperature	Tbiv	-7	°C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	-22	°C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.015	kW				
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items

Capacity control	variable			Rated air flow rate, outdoors	-	3720	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 64	dBA				
Annual energy consumption	Q _{HE}	5331	kWh				

For heat pump combination heater:

Declared load profile	L			Water heating energy efficiency	η_{wh}	120	%
Daily electricity consumption	Q _{elec}	4.440	kWh				
Annual electricity consumption	AEC	977	kWh				

Contact details

MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS

3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

The identification and signature of the person empowered to bind the supplier;

Yasutaka MURAKAMI

The signature is signed in the average climate / medium-temperature section.

Section Manager, Quality Control Section

Shizuoka JAPAN

* Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

* Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-5F85VG
	Indoor unit:	EHST20D-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.8	kW	Seasonal space heating energy efficiency	η_s	126	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	4.1	kW	Tj = - 7 °C	COPd	2.81	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = + 2 °C	COPd	3.71	-
Tj = + 2 °C	Pdh	2.5	kW	Tj = + 7 °C	COPd	6.27	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = +12 °C	COPd	6.54	-
Tj = + 7 °C	Pdh	2.6	kW	Tj = bivalent temperature	COPd	2.91	-
Degradation co-efficient (**)	Cdh	0.96	-	Tj = operation limit temperature (***)	COPd	1.73	-
Tj = +12 °C	Pdh	2.3	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	2.13	-
Degradation co-efficient (**)	Cdh	0.96	-	Operation limit temperature	TOL	-20	°C
Tj = bivalent temperature	Pdh	4.1	kW	Heating water operating limit temperature	WTOL	55	°C
Tj = operation limit temperature (***)	Pdh	5.2	kW	Supplementary heater			
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	5.6	kW	Rated heat output (*)	Psup	6.8	kW
Bivalent temperature	Tbiv	-7	°C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	-22	°C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.015	kW				
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors	-	3720	m ³ /h
Capacity control	variable						
Sound power level, indoors/outdoors	L _{WA}	41 / 64	dBA				
Annual energy consumption	Q _{HE}	5197	kWh				

For heat pump combination heater:							
Declared load profile	L			Water heating energy efficiency	η_{wh}	120	%
Daily electricity consumption	Q _{elec}	4.440	kWh				
Annual electricity consumption	AEC	977	kWh				

Contact details							
MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS				3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan			
The identification and signature of the person empowered to bind the supplier;				Yasutaka MURAKAMI			
The signature is signed in the average climate / medium-temperature section.				Section Manager, Quality Control Section			
				Shizuoka JAPAN			

* Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

* Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-5F85VG
	Indoor unit:	EHST20D-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.1	kW	Seasonal space heating energy efficiency	η_s	159	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	-	kW	Tj = - 7 °C	COPd	-	-
Degradation co-efficient (**)	Cdh	-	-	Tj = + 2 °C	COPd	1.84	-
Tj = + 2 °C	Pdh	7.1	kW	Tj = + 7 °C	COPd	3.74	-
Degradation co-efficient (**)	Cdh	1.00	-	Tj = +12 °C	COPd	5.26	-
Tj = + 7 °C	Pdh	4.6	kW	Tj = bivalent temperature	COPd	1.84	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = operation limit temperature (***)	COPd	1.84	-
Tj = +12 °C	Pdh	2.0	kW	Operation limit temperature	TOL	-20	°C
Degradation co-efficient (**)	Cdh	0.96	-	Heating water operating limit temperature	WTOL	55	°C
Tj = bivalent temperature	Pdh	7.1	kW	Supplementary heater			
Tj = operation limit temperature (***)	Pdh	7.1	kW	Rated heat output (*)	Psup	0.0	kW
Bivalent temperature	Tbiv	2	°C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	2	°C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.015	kW				
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors	-	3720	m ³ /h
Capacity control	variable						
Sound power level, indoors/outdoors	L _{WA}	41 / 64	dBA				
Annual energy consumption	Q _{HE}	2342	kWh				

For heat pump combination heater:							
Declared load profile	L			Water heating energy efficiency	η_{wh}	134	%
Daily electricity consumption	Q _{elec}	3.890	kWh				
Annual electricity consumption	AEC	856	kWh				

Contact details							
MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS				3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan			
The identification and signature of the person empowered to bind the supplier;				Yasutaka MURAKAMI			
The signature is signed in the average climate / medium-temperature section.				Section Manager, Quality Control Section			
				Shizuoka JAPAN			

* Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

* Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-5F85VG
	Indoor unit:	EHST20D-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.8	kW	Seasonal space heating energy efficiency	η_s	208	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	-	kW	Tj = - 7 °C	COPd	-	-
Degradation co-efficient (**)	Cdh	-	-				
Tj = + 2 °C	Pdh	7.8	kW	Tj = + 2 °C	COPd	3.00	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 7 °C	Pdh	5.0	kW	Tj = + 7 °C	COPd	5.22	-
Degradation co-efficient (**)	Cdh	0.98	-				
Tj = +12 °C	Pdh	2.2	kW	Tj = +12 °C	COPd	6.29	-
Degradation co-efficient (**)	Cdh	0.96	-				
Tj = bivalent temperature	Pdh	7.8	kW	Tj = bivalent temperature	COPd	3.00	-
Tj = operation limit temperature (***)	Pdh	7.8	kW	Tj = operation limit temperature (***)	COPd	3.00	-
Bivalent temperature	Tbiv	2	°C	Operation limit temperature	TOL	-20	°C
Reference design conditions for space heating	Tdesignh	2	°C	Heating water operating limit temperature	WTOL	55	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.015	kW	Type of energy input	Electrical		
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				
Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	3720	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	41 / 64	dBA				
Annual energy consumption	Q _{HE}	1971	kWh				

For heat pump combination heater:

Declared load profile	L			Water heating energy efficiency	η_{wh}	134	%
Daily electricity consumption	Q _{elec}	3.890	kWh				
Annual electricity consumption	AEC	856	kWh				

Contact details

MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS

3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

The identification and signature of the person empowered to bind the supplier;

Yasutaka MURAKAMI

The signature is signed in the average climate / medium-temperature section.

Section Manager, Quality Control Section
Shizuoka JAPAN

* Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

* Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating

Pdesignh, and the rated heat output of a supplementary heater P_{sup} is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-5F85VG
	Indoor unit:	ERST17D-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.7	kW	Seasonal space heating energy efficiency	η_s	111	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	5.9	kW	Tj = - 7 °C	COPd	1.40	-
Degradation co-efficient (**)	Cdh	1.00	-				
Tj = + 2 °C	Pdh	3.7	kW	Tj = + 2 °C	COPd	3.07	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 7 °C	Pdh	2.4	kW	Tj = + 7 °C	COPd	3.93	-
Degradation co-efficient (**)	Cdh	0.98	-				
Tj = +12 °C	Pdh	2.1	kW	Tj = +12 °C	COPd	4.48	-
Degradation co-efficient (**)	Cdh	0.97	-				
Tj = bivalent temperature	Pdh	5.9	kW	Tj = bivalent temperature	COPd	1.40	-
Tj = operation limit temperature (****)	Pdh	5.1	kW	Tj = operation limit temperature (****)	COPd	1.21	-
Bivalent temperature	Tbiv	-7	°C	Operation limit temperature	TOL	-20	°C
Reference design conditions for space heating	Tdesignh	-10	°C	Heating water operating limit temperature	WTOL	55	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	Psup	1.6	kW
Thermostat-off mode	P _{TO}	0.015	kW	Type of energy input	Electrical		
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				
Other items							
Capacity control	variable			Rated air flow rate, outdoors	-	3720	m³/h
Sound power level, indoors/outdoors	L _{WA}	41 / 64	dBA				
Annual energy consumption	Q _{HE}	4844	kWh				

For heat pump combination heater:

Declared load profile	L			Water heating energy efficiency	η_{wh}	121	%
Daily electricity consumption	Qelec	4.130	kWh				
Annual electricity consumption	AEC	908	kWh				

Contact details

MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS

3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

The identification and signature of the person empowered to bind the supplier:

Yasutaka MURAKAMI
Section Manager, Quality Control Section
Shizuoka JAPAN

Yasutaka Murakami

* Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

* Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating

Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-5F85VG
	Indoor unit:	ERST17D-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.8	kW	Seasonal space heating energy efficiency	η_s	157	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	6.0	kW	Tj = - 7 °C	COPd	2.80	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 2 °C	Pdh	4.0	kW	Tj = + 2 °C	COPd	4.29	-
Degradation co-efficient (**)	Cdh	0.98	-				
Tj = + 7 °C	Pdh	2.6	kW	Tj = + 7 °C	COPd	4.72	-
Degradation co-efficient (**)	Cdh	0.97	-				
Tj = +12 °C	Pdh	2.3	kW	Tj = +12 °C	COPd	4.33	-
Degradation co-efficient (**)	Cdh	0.97	-				
Tj = bivalent temperature	Pdh	6.0	kW	Tj = bivalent temperature	COPd	2.80	-
Tj = operation limit temperature (****)	Pdh	6.8	kW	Tj = operation limit temperature (****)	COPd	2.50	-
Bivalent temperature	Tbiv	-7	°C	Operation limit temperature	TOL	-20	°C
Reference design conditions for space heating	Tdesignh	-10	°C	Heating water operating limit temperature	WTOL	55	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	Psup	0.0	kW
Thermostat-off mode	P _{TO}	0.015	kW	Type of energy input	Electrical		
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				
Other items							
Capacity control	variable			Rated air flow rate, outdoors	-	3720	m³/h
Sound power level, indoors/outdoors	L _{WA}	41 / 64	dBA				
Annual energy consumption	Q _{HE}	3515	kWh				

For heat pump combination heater:

Declared load profile	L			Water heating energy efficiency	η_{wh}	121	%
Daily electricity consumption	Qelec	4.130	kWh				
Annual electricity consumption	AEC	908	kWh				

Contact details

MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS

3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

The identification and signature of the person empowered to bind the supplier;

Yasutaka MURAKAMI

The signature is signed in the average climate / medium-temperature section.

Section Manager, Quality Control Section

Shizuoka JAPAN

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-5F85VG
	Indoor unit:	ERST17D-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	5.2	kW	Seasonal space heating energy efficiency	η_{sp}	93	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	3.2	kW	Tj = - 7 °C	COPd	1.91	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 2 °C	Pdh	1.9	kW	Tj = + 2 °C	COPd	2.96	-
Degradation co-efficient (**)	Cdh	0.98	-				
Tj = + 7 °C	Pdh	2.4	kW	Tj = + 7 °C	COPd	5.42	-
Degradation co-efficient (**)	Cdh	0.97	-				
Tj = +12 °C	Pdh	2.3	kW	Tj = +12 °C	COPd	6.03	-
Degradation co-efficient (**)	Cdh	0.96	-				
Tj = bivalent temperature	Pdh	3.2	kW	Tj = bivalent temperature	COPd	2.06	-
Tj = operation limit temperature (***)	Pdh	3.8	kW	Tj = operation limit temperature (***)	COPd	1.00	-
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	4.3	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	1.00	-
Bivalent temperature	Tbiv	-7	°C	Operation limit temperature	TOL	-20	°C
Reference design conditions for space heating	Tdesignh	-22	°C	Heating water operating limit temperature	WTOL	55	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	5.2	kW
Thermostat-off mode	P _{TO}	0.015	kW	Type of energy input	Electrical		
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors	-	3720	m³/h
Capacity control	variable						
Sound power level, indoors/outdoors	L _{WA}	41 / 64	dBA				
Annual energy consumption	Q _{HE}	5331	kWh				

For heat pump combination heater:				Water heating energy efficiency	η_{wh}	122	%
Declared load profile	L						
Daily electricity consumption	Q _{elec}	4.120	kWh				
Annual electricity consumption	AEC	907	kWh				

Contact details							
MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS				3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan			

The identification and signature of the person empowered to bind the supplier;

Yasutaka MURAKAMI
Section Manager, Quality Control Section
Shizuoka JAPAN

The signature is signed in the average climate / medium-temperature section.

- Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.
 - Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.
- (*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
- (**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.
- (***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-5F85VG
	Indoor unit:	ERST17D-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.8	kW	Seasonal space heating energy efficiency	η_s	126	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = -7 °C	P _{dH}	4.1	kW	T _j = -7 °C	COP _d	2.81	-
Degradation co-efficient (**)	C _{dH}	0.99	-	T _j = +2 °C	COP _d	3.71	-
T _j = +2 °C	P _{dH}	2.5	kW	T _j = +7 °C	COP _d	6.27	-
Degradation co-efficient (**)	C _{dH}	0.98	-	T _j = +12 °C	COP _d	6.54	-
T _j = +7 °C	P _{dH}	2.6	kW	T _j = bivalent temperature	COP _d	2.91	-
Degradation co-efficient (**)	C _{dH}	0.96	-	T _j = operation limit temperature (***)	COP _d	1.73	-
T _j = +12 °C	P _{dH}	2.3	kW	T _j = -15 °C (if TOL < -20 °C)	COP _d	2.13	-
Degradation co-efficient (**)	C _{dH}	0.96	-	Operation limit temperature	TOL	-20	°C
T _j = bivalent temperature	P _{dH}	4.1	kW	Heating water operating limit temperature	WTOL	55	°C
T _j = operation limit temperature (***)	P _{dH}	5.2	kW	Supplementary heater			
T _j = -15 °C (if TOL < -20 °C)	P _{dH}	5.6	kW	Rated heat output (*)	P _{sup}	6.8	kW
Bivalent temperature	T _{biv}	-7	°C	Type of energy input	Electrical		
Reference design conditions for space heating	T _{designh}	-22	°C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.015	kW				
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items

Capacity control	variable			Rated air flow rate, outdoors	-	3720	m³/h
Sound power level, indoors/outdoors	L _{WA}	41 / 64	dBA				
Annual energy consumption	Q _{HE}	5197	kWh				

For heat pump combination heater:

Declared load profile	L			Water heating energy efficiency	η_{wh}	122	%
Daily electricity consumption	Q _{elec}	4.120	kWh				
Annual electricity consumption	AEC	907	kWh				

Contact details

MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS

3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

The identification and signature of the person empowered to bind the supplier;

Yasutaka MURAKAMI

The signature is signed in the average climate / medium-temperature section.

Section Manager, Quality Control Section

Shizuoka JAPAN

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-5F85VG
	Indoor unit:	ERST17D-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.1	kW	Seasonal space heating energy efficiency	η_s	159	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	-	kW	Tj = - 7 °C	COPd	-	-
Degradation co-efficient (**)	Cdh	-	-				
Tj = + 2 °C	Pdh	7.1	kW	Tj = + 2 °C	COPd	1.84	-
Degradation co-efficient (**)	Cdh	1.00	-				
Tj = + 7 °C	Pdh	4.6	kW	Tj = + 7 °C	COPd	3.74	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = +12 °C	Pdh	2.0	kW	Tj = +12 °C	COPd	5.26	-
Degradation co-efficient (**)	Cdh	0.96	-				
Tj = bivalent temperature	Pdh	7.1	kW	Tj = bivalent temperature	COPd	1.84	-
Tj = operation limit temperature (***)	Pdh	7.1	kW	Tj = operation limit temperature (***)	COPd	1.84	-
Bivalent temperature	Tbiv	2	°C	Operation limit temperature	TOL	-20	°C
Reference design conditions for space heating	Tdesignh	2	°C	Heating water operating limit temperature	WTOL	55	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	Psup	0.0	kW
Thermostat-off mode	P _{TO}	0.015	kW	Type of energy input	Electrical		
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items

Capacity control	variable			Rated air flow rate, outdoors	-	3720	m³/h
Sound power level, indoors/outdoors	L _{WA}	41 / 64	dBA				
Annual energy consumption	Q _{HE}	2342	kWh				

For heat pump combination heater:

Declared load profile	L			Water heating energy efficiency	η_{wh}	132	%
Daily electricity consumption	Q _{elec}	3.820	kWh				
Annual electricity consumption	AEC	839	kWh				

Contact details

MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS

3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

The identification and signature of the person empowered to bind the supplier;

Yasutaka MURAKAMI

The signature is signed in the average climate / medium-temperature section.

Section Manager, Quality Control Section

Shizuoka JAPAN

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-5F85VG
	Indoor unit:	ERST17D-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.8	kW	Seasonal space heating energy efficiency	η_s	208	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	-	kW	Tj = - 7 °C	COPd	-	-
Degradation co-efficient (**)	Cdh	-	-	Tj = + 2 °C	COPd	3.00	-
Tj = + 2 °C	Pdh	7.8	kW	Tj = + 7 °C	COPd	5.22	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = +12 °C	COPd	6.29	-
Tj = + 7 °C	Pdh	5.0	kW	Tj = bivalent temperature	COPd	3.00	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = operation limit temperature (***)	COPd	3.00	-
Tj = +12 °C	Pdh	2.2	kW	Operation limit temperature	TOL	-20	°C
Degradation co-efficient (**)	Cdh	0.96	-	Heating water operating limit temperature	WTOL	55	°C
Tj = bivalent temperature	Pdh	7.8	kW	Supplementary heater			
Tj = operation limit temperature (***)	Pdh	7.8	kW	Rated heat output (*)	Psup	0.0	kW
Bivalent temperature	Tbiv	2	°C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	2	°C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.015	kW				
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				
Other items							
Capacity control	variable			Rated air flow rate, outdoors	-	3720	m³/h
Sound power level, indoors/outdoors	L _{WA}	41 / 64	dBA				
Annual energy consumption	Q _{HE}	1971	kWh				

For heat pump combination heater:

Declared load profile	L			Water heating energy efficiency	η_{wh}	132	%
Daily electricity consumption	Qelec	3.820	kWh				
Annual electricity consumption	AEC	839	kWh				

Contact details

MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS

3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

The identification and signature of the person empowered to bind the supplier;

Yasutaka MURAKAMI

The signature is signed in the average climate / medium-temperature section.

Section Manager, Quality Control Section

Shizuoka JAPAN

* Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

* Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-5F85VG
	Indoor unit:	ERST20D-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.7	kW	Seasonal space heating energy efficiency	η_s	111	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	5.9	kW	Tj = - 7 °C	COPd	1.40	-
Degradation co-efficient (**)	Cdh	1.00	-	Tj = + 2 °C	COPd	3.07	-
Tj = + 2 °C	Pdh	3.7	kW	Tj = + 7 °C	COPd	3.93	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = +12 °C	COPd	4.48	-
Tj = + 7 °C	Pdh	2.4	kW	Tj = bivalent temperature	COPd	1.40	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = operation limit temperature (***)	COPd	1.21	-
Tj = +12 °C	Pdh	2.1	kW	Operation limit temperature	TOL	-20	°C
Degradation co-efficient (**)	Cdh	0.97	-	Heating water operating limit temperature	WTOL	55	°C
Tj = bivalent temperature	Pdh	5.9	kW	Supplementary heater			
Tj = operation limit temperature (***)	Pdh	5.1	kW	Rated heat output (*)	Psup	1.6	kW
Bivalent temperature	Tbiv	-7	°C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	-10	°C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.015	kW				
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				
Other items							
Capacity control	variable			Rated air flow rate, outdoors	-	3720	m³/h
Sound power level, indoors/outdoors	L _{WA}	41 / 64	dBA				
Annual energy consumption	Q _{HE}	4844	kWh				

For heat pump combination heater:

Declared load profile	L			Water heating energy efficiency	η_{wh}	123	%
Daily electricity consumption	Qelec	4.210	kWh				
Annual electricity consumption	AEC	927	kWh				

Contact details

mitsubishi electric corporation shizuoka works

3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

The identification and signature of the person empowered to bind the supplier:

Yasutaka MURAKAMI
Section Manager, Quality Control Section
Shizuoka JAPAN

Yasutaka Murakami

* Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

* Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-5F85VG
	Indoor unit:	ERST20D-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.8	kW	Seasonal space heating energy efficiency	ηs	157	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	6.0	kW	Tj = - 7 °C	COPd	2.80	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 2 °C	Pdh	4.0	kW	Tj = + 2 °C	COPd	4.29	-
Degradation co-efficient (**)	Cdh	0.98	-				
Tj = + 7 °C	Pdh	2.6	kW	Tj = + 7 °C	COPd	4.72	-
Degradation co-efficient (**)	Cdh	0.97	-				
Tj = +12 °C	Pdh	2.3	kW	Tj = +12 °C	COPd	4.33	-
Degradation co-efficient (**)	Cdh	0.97	-				
Tj = bivalent temperature	Pdh	6.0	kW	Tj = bivalent temperature	COPd	2.80	-
Tj = operation limit temperature (****)	Pdh	6.8	kW	Tj = operation limit temperature (****)	COPd	2.50	-
Bivalent temperature	Tbiv	-7	°C	Operation limit temperature	TOL	-20	°C
Reference design conditions for space heating	Tdesignh	-10	°C	Heating water operating limit temperature	WTOL	55	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.015	kW	Type of energy input	Electrical		
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				
Other items							
Capacity control	variable			Rated air flow rate, outdoors	-	3720	m³/h
Sound power level, indoors/outdoors	L _{WA}	41 / 64	dBA				
Annual energy consumption	Q _{HE}	3515	kWh				

For heat pump combination heater:

Declared load profile	L			Water heating energy efficiency	η_{wh}	123	%
Daily electricity consumption	Qelec	4.210	kWh				
Annual electricity consumption	AEC	927	kWh				

Contact details

MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS

3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

The identification and signature of the person empowered to bind the supplier;

Yasutaka MURAKAMI

The signature is signed in the average climate / medium-temperature section.

Section Manager, Quality Control Section
Shizuoka JAPAN

* Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

* Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-5F85VG
	Indoor unit:	ERST20D-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	5.2	kW	Seasonal space heating energy efficiency	ηs	93	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	3.2	kW	Tj = - 7 °C	COPd	1.91	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = + 2 °C	COPd	2.96	-
Tj = + 2 °C	Pdh	1.9	kW	Tj = + 7 °C	COPd	5.42	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = +12 °C	COPd	6.03	-
Tj = + 7 °C	Pdh	2.4	kW	Tj = bivalent temperature	COPd	2.06	-
Degradation co-efficient (**)	Cdh	0.97	-	Tj = operation limit temperature (***)	COPd	1.00	-
Tj = +12 °C	Pdh	2.3	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	1.00	-
Degradation co-efficient (**)	Cdh	0.96	-	Operation limit temperature	TOL	-20	°C
Tj = bivalent temperature	Pdh	3.2	kW	Heating water operating limit temperature	WTOL	55	°C
Tj = operation limit temperature (***)	Pdh	3.8	kW	Supplementary heater			
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	4.3	kW	Rated heat output (*)	Psup	5.2	kW
Bivalent temperature	Tbiv	-7	°C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	-22	°C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.015	kW				
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				
Other items							
Capacity control	variable			Rated air flow rate, outdoors	-	3720	m³/h
Sound power level, indoors/outdoors	L _{WA}	41 / 64	dBA				
Annual energy consumption	Q _{HE}	5331	kWh				

For heat pump combination heater:

Declared load profile	L			Water heating energy efficiency	η_{wh}	120	%
Daily electricity consumption	Qelec	4.440	kWh				
Annual electricity consumption	AEC	977	kWh				

Contact details

MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS

3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

The identification and signature of the person empowered to bind the supplier;

Yasutaka MURAKAMI

The signature is signed in the average climate / medium-temperature section.

Section Manager, Quality Control Section

Shizuoka JAPAN

* Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

* Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-5F85VG
	Indoor unit:	ERST20D-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.8	kW	Seasonal space heating energy efficiency	η_s	126	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T j			
T j = - 7 °C	Pdh	4.1	kW	T j = - 7 °C	COPd	2.81	-
Degradation co-efficient (**)	Cdh	0.99	-				
T j = + 2 °C	Pdh	2.5	kW	T j = + 2 °C	COPd	3.71	-
Degradation co-efficient (**)	Cdh	0.98	-				
T j = + 7 °C	Pdh	2.6	kW	T j = + 7 °C	COPd	6.27	-
Degradation co-efficient (**)	Cdh	0.96	-				
T j = +12 °C	Pdh	2.3	kW	T j = +12 °C	COPd	6.54	-
Degradation co-efficient (**)	Cdh	0.96	-				
T j = bivalent temperature	Pdh	4.1	kW	T j = bivalent temperature	COPd	2.91	-
T j = operation limit temperature (***)	Pdh	5.2	kW	T j = operation limit temperature (***)	COPd	1.73	-
T j = - 15 °C (if TOL < - 20 °C)	Pdh	5.6	kW	T j = - 15 °C (if TOL < - 20 °C)	COPd	2.13	-
Bivalent temperature	Tbiv	-7	°C	Operation limit temperature	TOL	-20	°C
Reference design conditions for space heating	Tdesignh	-22	°C	Heating water operating limit temperature	WTOL	55	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	Psup	6.8	kW
Thermostat-off mode	P _{TO}	0.015	kW	Type of energy input	Electrical		
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items

Capacity control	variable		Rated air flow rate, outdoors	-	3720	m³/h
Sound power level, indoors/outdoors	L _{WA}	41 / 64	dBA			
Annual energy consumption	Q _{HE}	5197	kWh			

For heat pump combination heater:

Declared load profile	L		Water heating energy efficiency	η_{wh}	120	%
Daily electricity consumption	Q _{elec}	4.440	kWh			
Annual electricity consumption	AEC	977	kWh			

Contact details

MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS

3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

The identification and signature of the person empowered to bind the supplier;

Yasutaka MURAKAMI

The signature is signed in the average climate / medium-temperature section.

 Section Manager, Quality Control Section
Shizuoka JAPAN

* Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

* Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating

Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-5F85VG
	Indoor unit:	ERST20D-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.1	kW	Seasonal space heating energy efficiency	η_s	159	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	-	kW	Tj = - 7 °C	COPd	-	-
Degradation co-efficient (**)	Cdh	-	-	Tj = + 2 °C	COPd	1.84	-
Tj = + 2 °C	Pdh	7.1	kW	Tj = + 7 °C	COPd	3.74	-
Degradation co-efficient (**)	Cdh	1.00	-	Tj = +12 °C	COPd	5.26	-
Tj = + 7 °C	Pdh	4.6	kW	Tj = bivalent temperature	COPd	1.84	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = operation limit temperature (***)	COPd	1.84	-
Tj = +12 °C	Pdh	2.0	kW	Operation limit temperature	TOL	-20	°C
Degradation co-efficient (**)	Cdh	0.96	-	Heating water operating limit temperature	WTOL	55	°C
Tj = bivalent temperature	Pdh	7.1	kW	Supplementary heater			
Tj = operation limit temperature (***)	Pdh	7.1	kW	Rated heat output (*)	Psup	0.0	kW
Bivalent temperature	Tbiv	2	°C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	2	°C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.015	kW				
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items

Capacity control	variable			Rated air flow rate, outdoors	-	3720	m³/h
Sound power level, indoors/outdoors	L _{WA}	41 / 64	dBA				
Annual energy consumption	Q _{HE}	2342	kWh				

For heat pump combination heater:

Declared load profile	L			Water heating energy efficiency	η_{wh}	134	%
Daily electricity consumption	Qelec	3.890	kWh				
Annual electricity consumption	AEC	856	kWh				

Contact details

MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS

3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

The identification and signature of the person empowered to bind the supplier;

Yasutaka MURAKAMI

The signature is signed in the average climate / medium-temperature section.

Section Manager, Quality Control Section

Shizuoka JAPAN

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-5F85VG
	Indoor unit:	ERST20D-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.8	kW	Seasonal space heating energy efficiency	η_s	208	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	-	kW	Tj = - 7 °C	COPd	-	-
Degradation co-efficient (**)	Cdh	-	-	Tj = + 2 °C	COPd	3.00	-
Tj = + 2 °C	Pdh	7.8	kW	Tj = + 7 °C	COPd	5.22	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = +12 °C	COPd	6.29	-
Tj = + 7 °C	Pdh	5.0	kW	Tj = bivalent temperature	COPd	3.00	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = operation limit temperature (***)	COPd	3.00	-
Tj = +12 °C	Pdh	2.2	kW	Operation limit temperature	TOL	-20	°C
Degradation co-efficient (**)	Cdh	0.96	-	Heating water operating limit temperature	WTOL	55	°C
Tj = bivalent temperature	Pdh	7.8	kW	Supplementary heater			
Tj = operation limit temperature (***)	Pdh	7.8	kW	Rated heat output (*)	Psup	0.0	kW
Bivalent temperature	Tbiv	2	°C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	2	°C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.015	kW				
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items

Capacity control	variable		Rated air flow rate, outdoors	-	3720	m³/h
Sound power level, indoors/outdoors	L _{WA}	41 / 64	dBA			
Annual energy consumption	Q _{HE}	1971	kWh			

For heat pump combination heater:

Declared load profile	L		Water heating energy efficiency	η_{wh}	134	%
Daily electricity consumption	Qelec	3.890	kWh			
Annual electricity consumption	AEC	856	kWh			

Contact details

MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS

3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

The identification and signature of the person empowered to bind the supplier;

Yasutaka MURAKAMI

The signature is signed in the average climate / medium-temperature section.

Section Manager, Quality Control Section

Shizuoka JAPAN

* Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

* Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.