



ENERG
енергия · ενέργεια

Y IA
IE IA

MITSUBISHI
ELECTRIC


Indoor unit E*ST30D-****D
Outdoor unit PUZ-SHWM140YAA




XL



A++

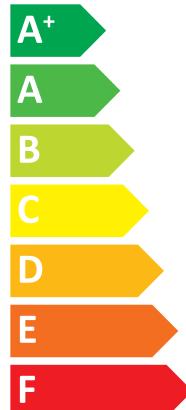

A

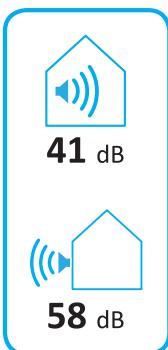

2019

811/2013

DG79V341H36

1. SPACE HEATER

1	2	Indoor unit	For medium-temperature application												For low-temperature application											
			Medium temp application						Low-temperature application						Medium temp application						Low-temperature application					
			3	6	8	9	11	13	15	16	21	22	25	4	6	8	9	11	13	15	16	21	22	25		
PUZ-SWM60VAA	EHSD-***D	✓	A++	6	126	3834	41	6	111	150	5181	2093	54	✓	A+++	6	181	2701	41	6	6	135	208	4284	1519	54
	ERSD-***D	✓	A++	6	128	3779	41	6	112	155	5147	2027	54	✓	A+++	6	184	2646	41	6	6	136	218	4251	1453	54
PUZ-SWM80VAA	EHSD-***D	✓	A++	8	129	5016	41	8	111	162	6890	2584	54	✓	A+++	8	181	3599	41	8	8	141	219	5460	1928	54
	ERSD-***D	✓	A++	8	130	4961	41	8	112	167	6857	2517	54	✓	A+++	8	184	3543	41	8	8	142	227	5427	1862	54
PUZ-SWM80YAA	EHSD-***D	✓	A++	8	128	5053	41	8	111	160	6923	2629	54	✓	A+++	8	179	3636	41	8	8	141	214	5493	1973	54
	ERSD-***D	✓	A++	8	130	4972	41	8	112	166	6875	2532	54	✓	A+++	8	183	3555	41	8	8	142	225	5444	1876	54
PUZ-SWM100VAA	EHSD-***D	✓	A++	10	132	6106	41	10	109	156	8813	3362	58	✓	A+++	10	178	4564	41	10	10	147	223	6575	2369	58
	ERSD-***D	✓	A++	10	134	6051	41	10	109	159	8780	3296	58	✓	A+++	10	180	4509	41	10	10	147	229	6555	2302	58
PUZ-SWM100YAA	EHSD-***D	✓	A++	10	132	6141	41	10	109	154	8840	3405	58	✓	A+++	10	177	4600	41	10	10	146	219	6601	2411	58
	ERSD-***D	✓	A++	10	133	6061	41	10	109	159	8791	3306	58	✓	A+++	10	180	4519	41	10	10	147	228	6565	2314	58
PUZ-SWM120VAA	EHSD-***D	✓	A++	12	131	7450	41	12	109	154	10673	4115	58	✓	A+++	12	177	5566	41	12	12	141	221	8290	2882	58
	ERSD-***D	✓	A++	12	132	7395	41	12	109	157	10640	4049	58	✓	A+++	12	178	5511	41	12	12	141	227	8257	2816	58
PUZ-SWM120YAA	EHSD-***D	✓	A++	12	131	7485	41	12	109	153	10698	4157	58	✓	A+++	12	176	5600	41	12	12	140	218	8316	2922	58
	ERSD-***D	✓	A++	12	132	7404	41	12	109	156	10649	4060	58	✓	A+++	12	178	5520	41	12	12	141	226	8267	2825	58
PUZ-SWM140VAA	EHSD-***D	✓	A++	14	134	8436	41	14	104	150	12843	4893	58	✓	A+++	14	175	6483	41	14	14	132	219	10250	3367	58
	ERSD-***D	✓	A++	14	135	8383	41	14	105	152	12810	4823	58	✓	A+++	14	177	6426	41	14	14	132	224	10217	3301	58
PUZ-SWM140YAA	EHSD-***D	✓	A++	14	134	8473	41	14	104	149	12867	4934	58	✓	A+++	14	175	6517	41	14	14	131	217	10275	3407	58
	ERSD-***D	✓	A++	14	135	8392	41	14	105	152	12819	4857	58	✓	A+++	14	177	6437	41	14	14	132	223	10226	3310	58
PUZ-SHW60VAA	EHSD-***D	✓	A++	6	129	3761	41	6	115	159	4993	1980	54	✓	A+++	6	184	2655	41	6	6	138	220	4202	1437	54
	ERSD-***D	✓	A++	6	131	3706	41	6	116	165	4960	1914	54	✓	A+++	6	186	2600	41	6	6	139	231	4168	1371	54
PUZ-SHW60YAA	EHSD-***D	✓	A++	8	132	4904	41	8	115	167	6705	2521	54	✓	A+++	8	184	3530	41	8	8	146	225	5299	1874	54
	ERSD-***D	✓	A++	8	133	4849	41	8	115	171	6672	2454	54	✓	A+++	8	187	3475	41	8	8	147	233	5266	1808	54
PUZ-SHW80VAA	EHSD-***D	✓	A++	8	131	4941	41	8	114	164	6737	2566	54	✓	A+++	8	182	3568	41	8	8	145	220	5332	1920	54
	ERSD-***D	✓	A++	8	133	4860	41	8	115	170	6669	2469	54	✓	A+++	8	187	3487	41	8	8	146	232	5284	1823	54
PUZ-SHW80YAA	EHSD-***D	✓	A++	10	136	5936	41	10	106	164	8272	3204	58	✓	A+++	10	183	4444	41	10	10	149	236	6480	2233	58
	ERSD-***D	✓	A++	10	138	5981	41	10	107	167	8239	3138	58	✓	A+++	10	185	4389	41	10	10	150	244	6447	2167	58
PUZ-SHW100VAA	EHSD-***D	✓	A++	10	135	5972	41	10	106	168	8298	3246	58	✓	A+++	10	181	4480	41	10	10	149	232	6508	2276	58
	ERSD-***D	✓	A++	10	137	5891	41	10	107	167	8250	3149	58	✓	A+++	10	185	4399	41	10	10	150	242	6459	2179	58
PUZ-SHW120VAA	EHSD-***D	✓	A++	12	136	7169	41	12	117	161	9902	3952	58	✓	A+++	12	179	5481	41	12	12	149	232	7843	2753	58
	ERSD-***D	✓	A++	12	138	7114	41	12	118	163	9869	3886	58	✓	A+++	12	181	5426	41	12	12	150	238	7810	2687	58
PUZ-SHW120YAA	EHSD-***D	✓	A++	12	136	7204	41	12	117																	

	English	Deutsch	Français	Italiano	Español
	Nederlands	Svenska	Dansk	Português	Ελληνικά
	suomi	Čeština	Български	Polski	-
1	Outdoor unit	Außengerät	unité extérieure	unità esterna	unidad exterior
	buitenunit	Utomhusenhet	Udendørs enhed	unidade exterior	Εξωτερική μονάδα
2	Indoor unit	Innengerät	unité intérieure	unità interna	unidad interior
	binnenunit	Inomhusenhet	Indendørs enhed	unidade interior	Εσωτερική μονάδα
	Sisäyksikkö	Vnitřní jednotka	Външно тяло	jednostka zewnętrzna	-
3	Medium-temperature application	Mittelteraturanwendung	l'application à moyenne température	le applicazioni a media temperatura	la aplicación de media temperatura
	mittenteratur-toepassing	mediumtemperaturapplikation	middelteraturanvendelsen	a aplicação a média temperatura	η εφαρμογή σε μέση θερμοκρασία
	keskilämpötilan sovellus	strednéteplotní aplikace	среднетемпературного приложения	zastosowania w średnich temperaturach	-
4	Low-temperature application	Niedertemperaturanwendung	l'application à basse température	le applicazioni a bassa temperatura	la aplicación de baja temperatura
	lägetemperatur-toepassing	lägtemperaturapplikation	lavtemperaturanvendelsen	a aplicação a baixa temperatura	η εφαρμογή σε χαμηλή θερμοκρασία
	matalanlämpötilan sovellus	nízkoteploplotní aplikace	низкотемпературни приложения	zastosowania w niskich temperaturach	-
5	Declared load profile	Angegebenes Lastprofil	Profil de soutirage déclaré	Perfil de carga declarado	Perfil de carga declarado
	Opggeven capaciteitsprofiel	Deklarerat belastningsprofil	Angivet forbrugprofil	Perfil de carga declarado	Δηλωμένο προφίλ φορτίου
	Ilmoitettu kuormitusprofili	Deklarowany záťživoj profil	Обявен товарен профил	Deklarowany profil obciążenia	-
6	Seasonal space heating energy efficiency class	die Klasse für die jahreszeitbedingte Raumheizungs-Energieeffizienz	la classe d'efficacité énergétique saisonnière, pour le chauffage des locaux	la classe di efficienza energetica stagionale del riscaldamento d'ambiente	la clase de eficiencia energética estacional de calefacción
	de seizoensgebonden energie-efficiëntieklaasse voor ruimteverwarming	säsongerelaterade energieeffektivitetsklass vid rumsuppvärming	klassen för årsvarningsgrad ved rumopvarmning	A classe de eficiencia energética do aquecimento ambiente sazonal	η τάξη ενέργειας απόδοσης της εποχιακής θέμανσης χώρου
	tilalämmytyksen kausittainen energiatehokkuusluokka	tilařská energetická účinnost vytápění	klasifikasi sezonjata otopenitelné energijnej efektivnosti	klasa sezowej efektywnosci energetycznej ogrzewania pomieszczeń	-
7	Water heating energy efficiency class	die Klasse für die Warmwasserbereitungs-Energieeffizienz	la classe d'efficacité énergétique, pour le chauffage de l'eau	la classe di efficienza energetica del riscaldamento dell'acqua	la clase de eficiencia energética del caldeo de agua
	de energie-efficiëntieklaasse voor waterverwarming	energieeffektivitetsklass vid vattenuppvärming	klassen for årsvarningsgrad ved vandopvarmning	A classe di efficienza energetica do aquecimento de água	η τάξη ενέργειας απόδοσης θέμανσης νερού
	vedenlämmityksen energiatehokkuusluokka	tilařská energetická účinnost ohřevu vody	klasifikasi na energetická efektivnosti pri podgrávanie na voda	klasa efektywnosci energetycznej podgrzewania wody	-
8	Rated heat output under average climate conditions	die Wärmenennleistung bei durchschnittlichen Klimaverhältnissen	la puissance thermique nominale dans les conditions climatiques moyennes	la potencia calorífica nominal(en condiciones climáticas medias)	la potencia calorífica nominal(en condiciones climáticas medias)
	de nominale warmteafgifte(onder gemiddelde klimaatomstandigheden)	Den nominella avgivna värmeeffekten(under genomsnittliga klimatförhållanden)	den nominelle nyttoeffekt(under gennemsnittlige klimaforhold)	A potência calorífica nominal(em condições climáticas médias)	η ονομαστική θερμική ισχύς(υπό μέσες κλιματικές συνθήκες)
	nimellistämpoteho(keskimääräisissä ilmasto-olosuhteissa)	jmenvöitytepely výkon za průměrných klimatických podmínek	znamionowa moccieplna(w warunkach klimatu umiarkowanego)	-	-
9	For space heating, annual energy consumption under average climate conditions	für die Raumheizung, den jährlichen Energieverbrauch bei durchschnittlichen Klimaverhältnissen	pour le chauffage des locaux, la consommation annuelle d'énergie(dans les conditions climatiques moyennes)	per il riscaldamento d'ambiente, il consumo annuo di energia(in condizioni climatiche medie)	para calentar espacios, el consumo anual de energía(en condiciones climáticas medias)
	voor ruimteverwarming, het jaarlijkse energieverbruik(onder gemiddelde klimaatomstandigheden)	För rumsuppvärming, årlig energiförbrukning(vid genomsnittliga klimatförhållanden)	for rumopvarmning det årlige energiforbrug(under gennemsnittlige klimaforhold)	Para o aquecimento ambiente, o consumo anual de energia(em condições climáticas mé dias)	για τη θέμανση χώρου, η ετήσια κατανάλωση ενέργειας(υπό μέσες κλιματικές συνθήκες)
	tilalämmytyksestä vuotuinen energiankulutus(keskimääräisissä ilmasto-olosuhteissa)	pro vytápění – roční spotřeba energie za průměrných klimatických podmínek	za opředání, godišnato potrebne na energii(pri sredni klimatichni uslovija)	w odniesieniu do ogrzewania pomieszczeń, roczne zużycie energii(w warunkach klimatu umiarkowanego)	-
10	For water heating, annual electricity consumption under average climate conditions	für die Warmwasserbereitung, den jährlichen Stromverbrauch bei durchschnittlichen Klimaverhältnissen	pour le chauffage de l'eau, la consommation annuelle d'électricité(dans les conditions climatiques moyennes)	per il riscaldamento dell'acqua, il consumo annuo di energia(in condizioni climatiche medie)	para calentar agua, el consumo anual de electricidad(en condiciones climáticas medias)
	voor waterverwarming, het jaarlijkse elektriciteitsverbruik(onder gemiddelde klimaatomstandigheden)	För vattenuppvärming, årlig elförbrukning(vid genomsnittliga klimatförhållanden)	for vandopvarmning det årlige elforbrug(under gennemsnittlige klimaforhold)	para o aquecimento de água, o consumo anual de eletricidade(em condições climáticas m édias)	για τη θέμανση νερού, η ετήσια κατανάλωση ηλεκτρικής ενέργειας(υπό μέσες κλιματικές συνθήκες)
	vedenlämmityksestä vuotuinen sähkökulutus(keskimääräisissä ilmasto-olosuhteissa)	pro ohřev vody – roční spotřeba elektrické energie za průměrných klimatických podmínek	za podgrávanie na voda, godišnato potrebne na energii(pri sredni klimatichni uslovija)	w odniesieniu do podgrzewania wody, roczne zużycie energii elektrycznej(w warunkach klimatu umiarkowanego)	-
11	Seasonal space heating energy efficiency under average climate conditions	die jahreszeitbedingte Raumheizungs-Energieeffizienz bei durchschnittlichen Klimaverhältnissen	l'efficacité énergétique saisonnière pour le chauffage des locaux(dans les conditions climatiques moyennes)	l'efficienza energetica stagionale di riscaldamento d'ambiente(in condizioni climatiche medie)	la eficiencia energética estacional de calefacción(en condiciones climáticas medias)
	de seizoensgebonden energie-efficiëntie voor ruimteverwarming(onder gemiddelde klimaatomstandigheden)	Säsongsmedelverkningsgrad för rumsuppvärming(vid genomsnittliga klimatförhållanden)	årsvarningsgraden ved rumopvarmning(under gennemsnittlige klimaforhold)	A eficiencia energética do aquecimento ambiente sazonal(em condições climáticas m édias)	η ενέργειας απόδοση της εποχιακής θέμανσης χώρου(υπό μέσες κλιματικές συνθήκες)
	tilalämmytyksen kausittainen energiatehokkuus(keskimääräisissä ilmasto-olosuhteissa)	sezonní energetická účinnost vytápění za průměrných klimatických podmínek	sezonjata otopenitelná efektivnost pri opředení(pri sredni klimatichni uslovija)	sezonowa efektywnosc energetyczna ogrzewania pomieszczeń(w warunkach klimatu umiarkowanego)	-
12	Water heating energy efficiency under average climate conditions	die Warmwasserbereitungs-Energieeffizienz bei durchschnittlichen Klimaverhältnissen	l'efficacité énergétique pour le chauffage de l'eau(dans les conditions climatiques moyennes)	l'efficienza energetica di riscaldamento dell'acqua(in condizioni climatiche medie)	la eficiencia energética del caldeo de agua(en condiciones climáticas medias)
	de energie-efficiëntie voor waterverwarming(onder gemiddelde klimaatomstandigheden)	Energieeffektivitet vid vattenuppvärming(vid genomsnittliga klimatförhållanden)	energiereffektiviteten ved vandopvarmning(under gennemsnittlige klimaforhold)	a eficiencia energética do aquecimento de água(em condições climáticas médias)	η ενέργειας απόδοση θέμανσης νερού(υπό μέσες κλιματικές συνθήκες)
	vedenlämmityksestä vuotuinen sähkökulutus(keskimääräisissä ilmasto-olosuhteissa)	energetická účinnost ohřevu vody za průměrných klimatických podmínek	energetická efektivnost pri podgrávanie na voda(pri sredni klimatichni uslovija)	efektywność energetyczna podgrzewania wody(w warunkach klimatu umiarkowanego)	-
13	Sound power level L _{WA} indoor	der Schallleistungspegel L _{WA} , in Gebäuden	le niveau de puissance acoustique L _{WA} , à l'intérieur	il livello di potenza sonora L _{WA} all'interno	el nivel de potencia acústica L _{WA} en interiores
	het geluidswarmegensniveau L _{WA} , binnens	Ljudeffektnivå L _{WA} i inomhus	lyddefektivnivået L _{WA} i inde	O nível de potência sonora L _{WA} na interior	η στάθμη ηχητικής ισχύος L _{WA} εσωτερικού χώρου
	äänielohataso L _{WA} sisällä	hlađad akustičké výkonu L _{WA} ve vnitřním prostoru	nívoto na zvukovata možnost L _{WA} na zakrito	poziom mocy akustycznej L _{WA} w pomieszczeniu	-
14	Work only during off-peak hours	dass ein ausschließlicher Betrieb des Kombiheizerates zu Schwachlastzeiten	fonctionner qu'en heures creuses	funzione soltanto durante le ore morte	funcionar solamente durante las horas de baja demanda
	werken uitsluitend in de daturen	drivas uteslutande under perioder med låg belastning	fungere uden for spidsbelastningsperioder	de funcionar unicamenta para das horas de pico	λειτουργία μόνο εκτός των ωρών οικτής
	toimimaan ainoastaan kuluutushuipujen ulkopuolella	provoca pouze mim spíčku	pracować jedynie w godzinach poza szczytowym obciążeniem	-	-
15	Rated heat output under colder climate conditions	die Wärmenennleistung bei kälteren Klimaverhältnissen	la puissance thermique nominale, dans les conditions climatiques plus froides	la potencia termica nominal, en condiciones climáticas más frías	la potencia calorífica nominal en condiciones climáticas más frías
	de nominale warmteafgifte, onder koudere klimaatomstandigheden	Nominell avgiven värmeeffekt vid kallare klimatförhållanden	den nominelle nyttoeffekt under koldre klimaforhold	A potencia calorifica nominal em condições climáticas mais frias	η ονομαστική θερμική ισχύς υπό ψυχρότερες κλιματικές συνθήκες
	nimellistämpoteho, kylmissä ilmasto-olosuhteissa	jmenvöitytepely výkon za chladnejších klimatických podmínek	nominalna toplinna možnost pri opředení klimatickej uslovia	znamionowa moccieplna w warunkach klimatu chłodnego	-
16	Rated heat output under warmer climate conditions	die Wärmenennleistung bei wärmeren Klimaverhältnissen	la puissance thermique nominale, dans les conditions climatiques plus chaudes	la potencia termica nominal, en condiciones climáticas più calde	la potencia calorífica nominal en condiciones climáticas más cálidas
	de nominale warmteafgifte, onder warmer klimaatomstandigheden	Nominell avgiven värmeeffekt vid varmare klimatförhållanden	den nominelle nyttoeffekt under varmere klimaforhold	A potencia calorifica nominal em condições climáticas mais quentes	η ονομαστική θερμική ισχύς υπό θερμότερες κλιματικές συνθήκες
	nimellistämpoteho, lämpimissä ilmasto-olosuhteissa	jmenvöitytepely výkon za teplejších klimatických podmínek	nominalna toplinna možnost pri op-tolli klimatickej uslovia	znamionowa moccieplna w warunkach klimatu cieplego	-
17	For space heating, annual energy consumption under colder climate conditions	für die Raumheizung, der jährliche Energieverbrauch bei kälteren Klimaverhältnissen	pour le chauffage des locaux, la consommation annuelle d'énergie, dans les conditions climatiques plus froides	per il riscaldamento d'ambiente, il consumo annuo di energia, in condizioni climatiche più fredde	para calentar espacios, el consumo anual de energía en condiciones climáticas más frías
	voor ruimteverwarming, het jaarlijkse energieverbruik onder koudere klimaatomstandigheden	For rumsuppvärming, årlig energiförbrukning under kallare klimatförhållanden	for rumopvarmning det årlige energiforbrug under koldere klimaforhold	Para o aquecimento ambiente, o consumo anual de energia em condições climáticas mais frias	για τη θέμανση χώρου, η ετήσια κατανάλωση ενέργειας υπό ψυχρότερες κλιματικές συνθήκες
	tilalämmytyksestä vuotuinen energiankulutus kylmissä ilmasto-olosuhteissa	pro vytápění – roční spotřeba energie za chladnejší klimatických podmínek	za opředání, godišnato potrebne na energii(pri sredni klimatichni uslovija)	w odniesieniu do ogrzewania pomieszczeń, roczne zużycie energii w warunkach klimatu chłodnego	-
18	For space heating, annual energy consumption under warmer climate conditions	für die Raumheizung, der jährliche Energieverbrauch bei wärmeren Klimaverhältnissen	pour le chauffage des locaux, la consommation annuelle d'énergie, dans les conditions climatiques plus chaudes	per il riscaldamento d'ambiente, il consumo annuo di energia, in condizioni climatiche più calde	para calentar espacios, el consumo anual de energía en condiciones climáticas más cálidas
	voor ruimteverwarming, het jaarlijkse energieverbruik onder warmere klimaatomstandigheden	For rumsuppvärming, årlig energiförbrukning under varmare klimatförhållanden	for rumopvarmning det årlige energiforbrug under varmre klimaforhold	Para o aquecimento ambiente, o consumo anual de energia em condições climáticas mais quentes	για θέμανση χώρου, η ετήσια κατανάλωση ενέργειας υπό θερμότερες κλιματικές συνθήκες
	tilalämmytyksestä vuotuinen energiankulutus lämpimissä ilmasto-olosuhteissa	pro vytápění – roční spotřeba energie za teplejších klimatických podmínek	za opředání, godišnato potrebne na energii(pri sredni klimatichni uslovija)	w odniesieniu do ogrzewania pomieszczeń, roczne zużycie energii w warunkach klimatu cieplego	-
19	For water heating, annual energy consumption under colder climate conditions	für die Warmwasserbereitung, der jährliche Stromverbrauch bei kälteren Klimaverhältnissen	pour le chauffage de l'eau, la consommation annuelle d'électricité, dans les conditions climatiques plus froides	per il riscaldamento dell'acqua, il consumo annuo di energia, in condizioni climatiche più fredde	para calentar agua, el consumo anual de electricidad en condiciones climáticas más frías
	voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder koudere klimaatomstandigheden	För vattenuppvärming, årlig elförbrukning under kallare klimatförhållanden	for vandopvarmning det årlige elforbrug under koldere klimaforhold	para o aquecimento de água, o consumo anual de eletricidade em condições climáticas mais frias	για θέμανση νερού, η ετήσια κατανάλωση ηλεκτρικής ενέργειας υπό ψυχρότερες κλιματικές συνθήκες
	vedenlämmityksestä vuotuinen sähkökulutus kylmissä ilmasto-olosuhteissa	pro ohřev vody – roční spotřeba elektrické energie za chladnejších klimatických podmínek	za podgrávanie na voda, godišnato potrebne na elektronenergie pri op-tolli klimatickej uslovia	w odniesieniu do podgrzewania wody, roczne zużycie energii elektrycznej w warunkach klimatu chłodnego	-
20	For water heating, annual energy consumption under warmer climate conditions	für die Warmwasserbereitung, der jährliche Stromverbrauch bei wärmeren Klimaverhältnissen	pour le chauffage de l'eau, la consommation annuelle d'électricité, dans les conditions climatiques plus chaudes	per il riscaldamento dell'acqua, il consumo annuo di energia, in condizioni climatiche più calde	para calentar agua, el consumo anual de electricidad en condiciones climáticas más cálidas
	voor waterverwarming, het jaarlijkse elektriciteitsverbruik				

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUZ-SHWM140YAA	
	Indoor unit:	EHST30D-***D	
Air-to-water heat pump:	yes		
Water-to-water heat pump:	no		
Brine-to-water heat pump:	no		
Low-temperature heat pump:	no		
Equipped with a supplementary heater:	yes		
Heat pump combination heater:	yes		
Parameters for	medium-temperature application.		
Parameters for	average climate conditions.		

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit			
Rated heat output (*)	Prated	14.0	kW	Seasonal space heating energy efficiency	ηs	141	%			
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj										
Tj = - 7 °C	Pdh	12.4	kW	Tj = - 7 °C	COPd	2.18	-			
Degradation co-efficient (**)	Cdh	1.00	-	Tj = + 2 °C	COPd	3.49	-			
Tj = + 2 °C	Pdh	7.5	kW	Tj = + 7 °C	COPd	4.85	-			
Degradation co-efficient (**)	Cdh	0.99	-	Tj = +12 °C	COPd	6.61	-			
Tj = + 7 °C	Pdh	6.3	kW	Tj = bivalent temperature	COPd	1.92	-			
Degradation co-efficient (**)	Cdh	0.98	-	Tj = operation limit temperature (***)	COPd	1.92	-			
Tj = +12 °C	Pdh	3.9	kW	Operation limit temperature	TOL	-30	°C			
Degradation co-efficient (**)	Cdh	0.96	-	Heating water operating limit temperature	WTOL	60	°C			
Tj = bivalent temperature	Pdh	14.0	kW	Supplementary heater						
Tj = operation limit temperature (***)	Pdh	14.0	kW	Rated heat output (*)	Psup	0.0	kW			
Bivalent temperature	Tbiv	-10	°C	Type of energy input	Electrical					
Reference design conditions for space heating	Tdesignh	-10	°C							
Power consumption in modes other than active mode										
Off mode	P _{OFF}	0.022	kW							
Thermostat-off mode	P _{TO}	0.022	kW							
Standby mode	P _{SB}	0.022	kW							
Crankcase heater mode	P _{CK}	0.000	kW							

Other items

Capacity control	variable			Rated air flow rate, outdoors	-	2640	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 58	dB				
Annual energy consumption	Q _{HE}	8055	kWh				

For heat pump combination heater:

Declared load profile	XL			Water heating energy efficiency	ηwh	114	%
Daily electricity consumption	Qelec	7.320	kWh				
Annual electricity consumption	AEC	1610	kWh				

Contact details

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY	Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre – Manisa, Turkey
---	---

The identification and signature of the person empowered to bind the supplier:

Kenichi SAITO

Manager, Quality Assurance Department

TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUZ-SHWM140YAA	
	Indoor unit:	EHST30D-***D	
Air-to-water heat pump:	yes		
Water-to-water heat pump:	no		
Brine-to-water heat pump:	no		
Low-temperature heat pump:	no		
Equipped with a supplementary heater:	yes		
Heat pump combination heater:	yes		
Parameters for	low-temperature application.		
Parameters for	average climate conditions.		

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit			
Rated heat output (*)	Prated	14.0	kW	Seasonal space heating energy efficiency	ηs	182	%			
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj										
Tj = - 7 °C	Pdh	12.4	kW	Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj	COPd	3.00	-			
Degradation co-efficient (**)	Cdh	1.00	-	Tj = - 7 °C	COPd	4.59	-			
Tj = + 2 °C	Pdh	7.5	kW	Tj = + 2 °C	COPd	6.00	-			
Degradation co-efficient (**)	Cdh	0.99	-	Tj = + 7 °C	COPd	7.19	-			
Tj = + 7 °C	Pdh	6.4	kW	Tj = bivalent temperature	COPd	2.55	-			
Degradation co-efficient (**)	Cdh	0.98	-	Tj = operation limit temperature (***)	COPd	2.55	-			
Tj = +12 °C	Pdh	4.1	kW	Operation limit temperature	TOL	-30	°C			
Degradation co-efficient (**)	Cdh	0.96	-	Heating water operating limit temperature	WTOL	60	°C			
Tj = bivalent temperature	Pdh	14.0	kW	Supplementary heater						
Tj = operation limit temperature (***)	Pdh	14.0	kW	Rated heat output (*)	Psup	0.0	kW			
Bivalent temperature	Tbiv	-10	°C	Type of energy input	Electrical					
Reference design conditions for space heating	Tdesignh	-10	°C							
Power consumption in modes other than active mode										
Off mode	P _{OFF}	0.022	kW							
Thermostat-off mode	P _{TO}	0.022	kW							
Standby mode	P _{SB}	0.022	kW							
Crankcase heater mode	P _{CK}	0.000	kW							

Other items

Capacity control	variable			Rated air flow rate, outdoors	-	2640	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 58	dB				
Annual energy consumption	Q _{HE}	6262	kWh				

For heat pump combination heater:

Declared load profile	XL			Water heating energy efficiency	ηwh	114	%
Daily electricity consumption	Qelec	7.320	kWh				
Annual electricity consumption	AEC	1610	kWh				

Contact details

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY	Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre – Manisa, Turkey
---	---

The identification and signature of the person empowered to bind the supplier;

Kenichi SAITO

Manager, Quality Assurance Department

TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUZ-SHWM140YAA	
	Indoor unit:	EHST30D-***D	
Air-to-water heat pump:	yes		
Water-to-water heat pump:	no		
Brine-to-water heat pump:	no		
Low-temperature heat pump:	no		
Equipped with a supplementary heater:	yes		
Heat pump combination heater:	yes		
Parameters for	medium-temperature application.		
Parameters for	colder climate conditions.		

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	14.0	kW	Seasonal space heating energy efficiency	ηs	115	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj							
Tj = - 7 °C	Pdh	8.5	kW	Tj = - 7 °C	COPd	2.63	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = + 2 °C	COPd	3.49	-
Tj = + 2 °C	Pdh	5.2	kW	Tj = + 7 °C	COPd	4.40	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = +12 °C	COPd	6.92	-
Tj = + 7 °C	Pdh	4.2	kW	Tj = bivalent temperature	COPd	1.53	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = operation limit temperature (***)	COPd	1.55	-
Tj = +12 °C	Pdh	4.2	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	1.52	-
Degradation co-efficient (**)	Cdh	0.96	-	Operation limit temperature	TOL	-30	°C
Tj = bivalent temperature	Pdh	11.8	kW	Heating water operating limit temperature	WTOL	60	°C
Tj = operation limit temperature (***)	Pdh	10.7	kW				
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	11.4	kW				
Bivalent temperature	Tbiv	-16	°C				
Reference design conditions for space heating	Tdesignh	-22	°C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	Psup	3.3	kW
Thermostat-off mode	P _{TO}	0.022	kW	Type of energy input		Electrical	
Standby mode	P _{SB}	0.022	kW				
Crankcase heater mode	P _{CK}	0.000	kW				
Other items							
Capacity control		variable		Rated air flow rate, outdoors		-	2640 m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 58	dB				
Annual energy consumption	Q _{HE}	11674	kWh				

For heat pump combination heater:						
Declared load profile		XL		Water heating energy efficiency	ηwh	104 %
Daily electricity consumption	Qelec	7.980	kWh			
Annual electricity consumption	AEC	1755	kWh			
Contact details						

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre – Manisa, Turkey

The identification and signature of the person empowered to bind the supplier;

Kenichi SAITO

Manager, Quality Assurance Department

TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUZ-SHWM140YAA	
	Indoor unit:	EHST30D-***D	
Air-to-water heat pump:	yes		
Water-to-water heat pump:	no		
Brine-to-water heat pump:	no		
Low-temperature heat pump:	no		
Equipped with a supplementary heater:	yes		
Heat pump combination heater:	yes		
Parameters for	low-temperature application.		
Parameters for	colder climate conditions.		

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	14.0	kW	Seasonal space heating energy efficiency	η_s	153	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj							
Tj = - 7 °C	Pdh	8.3	kW	Tj = - 7 °C	COPd	3.65	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = + 2 °C	COPd	4.59	-
Tj = + 2 °C	Pdh	5.2	kW	Tj = + 7 °C	COPd	5.15	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = +12 °C	COPd	8.80	-
Tj = + 7 °C	Pdh	4.6	kW	Tj = bivalent temperature	COPd	2.03	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = operation limit temperature (***)	COPd	1.79	-
Tj = +12 °C	Pdh	4.3	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	2.05	-
Degradation co-efficient (**)	Cdh	0.96	-	Operation limit temperature	TOL	-30	°C
Tj = bivalent temperature	Pdh	11.8	kW	Heating water operating limit temperature	WTOL	60	°C
Tj = operation limit temperature (***)	Pdh	10.7	kW				
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	11.4	kW				
Bivalent temperature	Tbiv	-16	°C				
Reference design conditions for space heating	Tdesignh	-22	°C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	Psup	3.3	kW
Thermostat-off mode	P _{TO}	0.022	kW	Type of energy input		Electrical	
Standby mode	P _{SB}	0.022	kW				
Crankcase heater mode	P _{CK}	0.000	kW				
Other items							
Capacity control		variable		Rated air flow rate, outdoors		-	2640 m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 58	dB				
Annual energy consumption	Q _{HE}	8865	kWh				

For heat pump combination heater:						
Declared load profile		XL		Water heating energy efficiency	η_{wh}	104 %
Daily electricity consumption	Qelec	7.980	kWh			
Annual electricity consumption	AEC	1755	kWh			
Contact details						

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre – Manisa, Turkey

The identification and signature of the person empowered to bind the supplier;

Kenichi SAITO

Manager, Quality Assurance Department

TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUZ-SHWM140YAA	
	Indoor unit:	EHST30D-***D	
Air-to-water heat pump:	yes		
Water-to-water heat pump:	no		
Brine-to-water heat pump:	no		
Low-temperature heat pump:	no		
Equipped with a supplementary heater:	yes		
Heat pump combination heater:	yes		
Parameters for	medium-temperature application.		
Parameters for	warmer climate conditions.		

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit			
Rated heat output (*)	Prated	14.0	kW	Seasonal space heating energy efficiency	ηs	154	%			
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj										
Tj = - 7 °C	Pdh	-	kW	Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj	COPd	-	-			
Degradation co-efficient (**)	Cdh	-	-	Tj = - 7 °C	COPd	2.00	-			
Tj = + 2 °C	Pdh	14.0	kW	Tj = + 2 °C	COPd	3.27	-			
Degradation co-efficient (**)	Cdh	1.00	-	Tj = + 7 °C	COPd	5.50	-			
Tj = + 7 °C	Pdh	8.8	kW	Tj = bivalent temperature	COPd	2.00	-			
Degradation co-efficient (**)	Cdh	0.99	-	Tj = operation limit temperature (***)	COPd	2.00	-			
Tj = +12 °C	Pdh	5.5	kW	Operation limit temperature	TOL	-30	°C			
Degradation co-efficient (**)	Cdh	0.98	-	Heating water operating limit temperature	WTOL	60	°C			
Tj = bivalent temperature	Pdh	14.0	kW	Supplementary heater						
Tj = operation limit temperature (***)	Pdh	14.0	kW	Rated heat output (*)	Psup	0.0	kW			
Bivalent temperature	Tbiv	2	°C	Type of energy input	Electrical					
Reference design conditions for space heating	Tdesignh	2	°C							
Power consumption in modes other than active mode										
Off mode	P _{OFF}	0.022	kW							
Thermostat-off mode	P _{TO}	0.022	kW							
Standby mode	P _{SB}	0.022	kW							
Crankcase heater mode	P _{CK}	0.000	kW							

Other items

Capacity control	variable			Rated air flow rate, outdoors	-	2640	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 58	dB				
Annual energy consumption	Q _{HE}	4757	kWh				

For heat pump combination heater:

Declared load profile	XL			Water heating energy efficiency	ηwh	130	%
Daily electricity consumption	Qelec	6.520	kWh				
Annual electricity consumption	AEC	1434	kWh				

Contact details

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY	Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre – Manisa, Turkey
---	---

The identification and signature of the person empowered to bind the supplier;

Kenichi SAITO

Manager, Quality Assurance Department

TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUZ-SHWM140YAA	
	Indoor unit:	EHST30D-***D	
Air-to-water heat pump:	yes		
Water-to-water heat pump:	no		
Brine-to-water heat pump:	no		
Low-temperature heat pump:	no		
Equipped with a supplementary heater:	yes		
Heat pump combination heater:	yes		
Parameters for	low-temperature application.		
Parameters for	warmer climate conditions.		

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit			
Rated heat output (*)	Prated	14.0	kW	Seasonal space heating energy efficiency	ηs	222	%			
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj										
Tj = - 7 °C	Pdh	-	kW	Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj	COPd	-	-			
Degradation co-efficient (**)	Cdh	-	-	Tj = - 7 °C	COPd	3.24	-			
Tj = + 2 °C	Pdh	14.0	kW	Tj = + 2 °C	COPd	5.15	-			
Degradation co-efficient (**)	Cdh	1.00	-	Tj = + 7 °C	COPd	7.18	-			
Tj = + 7 °C	Pdh	9.0	kW	Tj = bivalent temperature	COPd	3.24	-			
Degradation co-efficient (**)	Cdh	0.99	-	Tj = operation limit temperature (***)	COPd	3.24	-			
Tj = +12 °C	Pdh	5.1	kW	Operation limit temperature	TOL	-30	°C			
Degradation co-efficient (**)	Cdh	0.97	-	Heating water operating limit temperature	WTOL	60	°C			
Tj = bivalent temperature	Pdh	14.0	kW	Supplementary heater						
Tj = operation limit temperature (***)	Pdh	14.0	kW	Rated heat output (*)	Psup	0.0	kW			
Bivalent temperature	Tbiv	2	°C	Type of energy input	Electrical					
Reference design conditions for space heating	Tdesignh	2	°C							
Power consumption in modes other than active mode										
Off mode	P _{OFF}	0.022	kW							
Thermostat-off mode	P _{TO}	0.022	kW							
Standby mode	P _{SB}	0.022	kW							
Crankcase heater mode	P _{CK}	0.000	kW							

Other items

Capacity control	variable			Rated air flow rate, outdoors	-	2640	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 58	dB				
Annual energy consumption	Q _{HE}	3319	kWh				

For heat pump combination heater:

Declared load profile	XL			Water heating energy efficiency	ηwh	130	%
Daily electricity consumption	Qelec	6.520	kWh				
Annual electricity consumption	AEC	1434	kWh				

Contact details

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY	Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre – Manisa, Turkey
---	---

The identification and signature of the person empowered to bind the supplier;

Kenichi SAITO

Manager, Quality Assurance Department

TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUZ-SHWM140YAA	
	Indoor unit:	EHST30D-MED	
Air-to-water heat pump:	yes		
Water-to-water heat pump:	no		
Brine-to-water heat pump:	no		
Low-temperature heat pump:	no		
Equipped with a supplementary heater:	no		
Heat pump combination heater:	yes		
Parameters for	medium-temperature application.		
Parameters for	average climate conditions.		

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit			
Rated heat output (*)	Prated	14.0	kW	Seasonal space heating energy efficiency	ηs	141	%			
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj										
Tj = - 7 °C	Pdh	12.4	kW	Tj = - 7 °C	COPd	2.18	-			
Degradation co-efficient (**)	Cdh	1.00	-	Tj = + 2 °C	COPd	3.49	-			
Tj = + 2 °C	Pdh	7.5	kW	Tj = + 7 °C	COPd	4.85	-			
Degradation co-efficient (**)	Cdh	0.99	-	Tj = +12 °C	COPd	6.61	-			
Tj = + 7 °C	Pdh	6.3	kW	Tj = bivalent temperature	COPd	1.92	-			
Degradation co-efficient (**)	Cdh	0.98	-	Tj = operation limit temperature (***)	COPd	1.92	-			
Tj = +12 °C	Pdh	3.9	kW	Operation limit temperature	TOL	-30	°C			
Degradation co-efficient (**)	Cdh	0.96	-	Heating water operating limit temperature	WTOL	60	°C			
Tj = bivalent temperature	Pdh	14.0	kW	Supplementary heater						
Tj = operation limit temperature (***)	Pdh	14.0	kW	Rated heat output (*)	Psup	0.0	kW			
Bivalent temperature	Tbiv	-10	°C	Type of energy input	Electrical					
Reference design conditions for space heating	Tdesignh	-10	°C							
Power consumption in modes other than active mode										
Off mode	P _{OFF}	0.022	kW							
Thermostat-off mode	P _{TO}	0.022	kW							
Standby mode	P _{SB}	0.022	kW							
Crankcase heater mode	P _{CK}	0.000	kW							

Other items

Capacity control	variable			Rated air flow rate, outdoors	-	2640	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 58	dB				
Annual energy consumption	Q _{HE}	8055	kWh				

For heat pump combination heater:

Declared load profile	XL			Water heating energy efficiency	ηwh	114	%
Daily electricity consumption	Qelec	7.320	kWh				
Annual electricity consumption	AEC	1610	kWh				

Contact details

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY	Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre – Manisa, Turkey
---	---

The identification and signature of the person empowered to bind the supplier:

Kenichi SAITO

Manager, Quality Assurance Department

TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUZ-SHWM140YAA	
	Indoor unit:	EHST30D-MED	
Air-to-water heat pump:	yes		
Water-to-water heat pump:	no		
Brine-to-water heat pump:	no		
Low-temperature heat pump:	no		
Equipped with a supplementary heater:	no		
Heat pump combination heater:	yes		
Parameters for	low-temperature application.		
Parameters for	average climate conditions.		

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit			
Rated heat output (*)	Prated	14.0	kW	Seasonal space heating energy efficiency	ηs	182	%			
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj										
Tj = - 7 °C	Pdh	12.4	kW	Tj = - 7 °C	COPd	3.00	-			
Degradation co-efficient (**)	Cdh	1.00	-	Tj = + 2 °C	COPd	4.59	-			
Tj = + 2 °C	Pdh	7.5	kW	Tj = + 7 °C	COPd	6.00	-			
Degradation co-efficient (**)	Cdh	0.99	-	Tj = +12 °C	COPd	7.19	-			
Tj = + 7 °C	Pdh	6.4	kW	Tj = bivalent temperature	COPd	2.55	-			
Degradation co-efficient (**)	Cdh	0.98	-	Tj = operation limit temperature (***)	COPd	2.55	-			
Tj = +12 °C	Pdh	4.1	kW	Operation limit temperature	TOL	-30	°C			
Degradation co-efficient (**)	Cdh	0.96	-	Heating water operating limit temperature	WTOL	60	°C			
Tj = bivalent temperature	Pdh	14.0	kW	Supplementary heater						
Tj = operation limit temperature (***)	Pdh	14.0	kW	Rated heat output (*)	Psup	0.0	kW			
Bivalent temperature	Tbiv	-10	°C	Type of energy input	Electrical					
Reference design conditions for space heating	Tdesignh	-10	°C							
Power consumption in modes other than active mode										
Off mode	P _{OFF}	0.022	kW							
Thermostat-off mode	P _{TO}	0.022	kW							
Standby mode	P _{SB}	0.022	kW							
Crankcase heater mode	P _{CK}	0.000	kW							

Other items

Capacity control	variable			Rated air flow rate, outdoors	-	2640	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 58	dB				
Annual energy consumption	Q _{HE}	6262	kWh				

For heat pump combination heater:

Declared load profile	XL			Water heating energy efficiency	ηwh	114	%
Daily electricity consumption	Qelec	7.320	kWh				
Annual electricity consumption	AEC	1610	kWh				

Contact details

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY	Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre – Manisa, Turkey
---	---

The identification and signature of the person empowered to bind the supplier;

Kenichi SAITO

Manager, Quality Assurance Department

TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUZ-SHWM140YAA	
	Indoor unit:	EHST30D-MED	
Air-to-water heat pump:	yes		
Water-to-water heat pump:	no		
Brine-to-water heat pump:	no		
Low-temperature heat pump:	no		
Equipped with a supplementary heater:	no		
Heat pump combination heater:	yes		
Parameters for	medium-temperature application.		
Parameters for	colder climate conditions.		

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	14.0	kW	Seasonal space heating energy efficiency	η_s	115	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj							
Tj = - 7 °C	Pdh	8.5	kW	Tj = - 7 °C	COPd	2.63	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = + 2 °C	COPd	3.49	-
Tj = + 2 °C	Pdh	5.2	kW	Tj = + 7 °C	COPd	4.40	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = +12 °C	COPd	6.92	-
Tj = + 7 °C	Pdh	4.2	kW	Tj = bivalent temperature	COPd	1.53	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = operation limit temperature (***)	COPd	1.55	-
Tj = +12 °C	Pdh	4.2	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	1.52	-
Degradation co-efficient (**)	Cdh	0.96	-	Operation limit temperature	TOL	-30	°C
Tj = bivalent temperature	Pdh	11.8	kW	Heating water operating limit temperature	WTOL	60	°C
Tj = operation limit temperature (***)	Pdh	10.7	kW				
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	11.4	kW				
Bivalent temperature	Tbiv	-16	°C				
Reference design conditions for space heating	Tdesignh	-22	°C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	Psup	3.3	kW
Thermostat-off mode	P _{TO}	0.022	kW	Type of energy input		Electrical	
Standby mode	P _{SB}	0.022	kW				
Crankcase heater mode	P _{CK}	0.000	kW				
Other items							
Capacity control		variable		Rated air flow rate, outdoors		-	2640 m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 58	dB				
Annual energy consumption	Q _{HE}	11674	kWh				

For heat pump combination heater:							
Declared load profile		XL		Water heating energy efficiency	η_{wh}	104	%
Daily electricity consumption	Qelec	7.980	kWh				
Annual electricity consumption	AEC	1755	kWh				
Contact details							

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre – Manisa, Turkey

The identification and signature of the person empowered to bind the supplier;

Kenichi SAITO

Manager, Quality Assurance Department

TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUZ-SHWM140YAA	
	Indoor unit:	EHST30D-MED	
Air-to-water heat pump:	yes		
Water-to-water heat pump:	no		
Brine-to-water heat pump:	no		
Low-temperature heat pump:	no		
Equipped with a supplementary heater:	no		
Heat pump combination heater:	yes		
Parameters for	low-temperature application.		
Parameters for	colder climate conditions.		

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	14.0	kW	Seasonal space heating energy efficiency	η_s	153	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj							
Tj = - 7 °C	Pdh	8.3	kW	Tj = - 7 °C	COPd	3.65	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = + 2 °C	COPd	4.59	-
Tj = + 2 °C	Pdh	5.2	kW	Tj = + 7 °C	COPd	5.15	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = +12 °C	COPd	8.80	-
Tj = + 7 °C	Pdh	4.6	kW	Tj = bivalent temperature	COPd	2.03	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = operation limit temperature (***)	COPd	1.79	-
Tj = +12 °C	Pdh	4.3	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	2.05	-
Degradation co-efficient (**)	Cdh	0.96	-	Operation limit temperature	TOL	-30	°C
Tj = bivalent temperature	Pdh	11.8	kW	Heating water operating limit temperature	WTOL	60	°C
Tj = operation limit temperature (***)	Pdh	10.7	kW				
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	11.4	kW				
Bivalent temperature	Tbiv	-16	°C				
Reference design conditions for space heating	Tdesignh	-22	°C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	Psup	3.3	kW
Thermostat-off mode	P _{TO}	0.022	kW	Type of energy input		Electrical	
Standby mode	P _{SB}	0.022	kW				
Crankcase heater mode	P _{CK}	0.000	kW				
Other items							
Capacity control		variable		Rated air flow rate, outdoors		-	2640 m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 58	dB				
Annual energy consumption	Q _{HE}	8865	kWh				

For heat pump combination heater:							
Declared load profile		XL		Water heating energy efficiency	η_{wh}	104	%
Daily electricity consumption	Qelec	7.980	kWh				
Annual electricity consumption	AEC	1755	kWh				
Contact details							

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre – Manisa, Turkey

The identification and signature of the person empowered to bind the supplier;

Kenichi SAITO

Manager, Quality Assurance Department

TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUZ-SHWM140YAA	
	Indoor unit:	EHST30D-MED	
Air-to-water heat pump:	yes		
Water-to-water heat pump:	no		
Brine-to-water heat pump:	no		
Low-temperature heat pump:	no		
Equipped with a supplementary heater:	no		
Heat pump combination heater:	yes		
Parameters for	medium-temperature application.		
Parameters for	warmer climate conditions.		

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit			
Rated heat output (*)	Prated	14.0	kW	Seasonal space heating energy efficiency	ηs	154	%			
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj										
Tj = - 7 °C	Pdh	-	kW	Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj	COPd	-	-			
Degradation co-efficient (**)	Cdh	-	-	Tj = - 7 °C	COPd	2.00	-			
Tj = + 2 °C	Pdh	14.0	kW	Tj = + 2 °C	COPd	3.27	-			
Degradation co-efficient (**)	Cdh	1.00	-	Tj = + 7 °C	COPd	5.50	-			
Tj = + 7 °C	Pdh	8.8	kW	Tj = bivalent temperature	COPd	2.00	-			
Degradation co-efficient (**)	Cdh	0.99	-	Tj = operation limit temperature (***)	COPd	2.00	-			
Tj = +12 °C	Pdh	5.5	kW	Operation limit temperature	TOL	-30	°C			
Degradation co-efficient (**)	Cdh	0.98	-	Heating water operating limit temperature	WTOL	60	°C			
Tj = bivalent temperature	Pdh	14.0	kW	Supplementary heater						
Tj = operation limit temperature (***)	Pdh	14.0	kW	Rated heat output (*)	Psup	0.0	kW			
Bivalent temperature	Tbiv	2	°C	Type of energy input	Electrical					
Reference design conditions for space heating	Tdesignh	2	°C							
Power consumption in modes other than active mode										
Off mode	P _{OFF}	0.022	kW							
Thermostat-off mode	P _{TO}	0.022	kW							
Standby mode	P _{SB}	0.022	kW							
Crankcase heater mode	P _{CK}	0.000	kW							
Other items										
Capacity control	variable			Rated air flow rate, outdoors		-	2640 m ³ /h			
Sound power level, indoors/outdoors	L _{WA}	41 / 58	dB							
Annual energy consumption	Q _{HE}	4757	kWh							

For heat pump combination heater:

Declared load profile	XL		Water heating energy efficiency	ηwh	130	%
Daily electricity consumption	Qelec	6.520	kWh			
Annual electricity consumption	AEC	1434	kWh			

Contact details

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY	Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre – Manisa, Turkey
---	---

The identification and signature of the person empowered to bind the supplier;

Kenichi SAITO

Manager, Quality Assurance Department

TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUZ-SHWM140YAA	
	Indoor unit:	EHST30D-MED	
Air-to-water heat pump:	yes		
Water-to-water heat pump:	no		
Brine-to-water heat pump:	no		
Low-temperature heat pump:	no		
Equipped with a supplementary heater:	no		
Heat pump combination heater:	yes		
Parameters for	low-temperature application.		
Parameters for	warmer climate conditions.		

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit			
Rated heat output (*)	Prated	14.0	kW	Seasonal space heating energy efficiency	ηs	222	%			
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj										
Tj = - 7 °C	Pdh	-	kW	Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj	COPd	-	-			
Degradation co-efficient (**)	Cdh	-	-	Tj = - 7 °C	COPd	3.24	-			
Tj = + 2 °C	Pdh	14.0	kW	Tj = + 2 °C	COPd	5.15	-			
Degradation co-efficient (**)	Cdh	1.00	-	Tj = + 7 °C	COPd	7.18	-			
Tj = + 7 °C	Pdh	9.0	kW	Tj = bivalent temperature	COPd	3.24	-			
Degradation co-efficient (**)	Cdh	0.99	-	Tj = operation limit temperature (***)	COPd	3.24	-			
Tj = +12 °C	Pdh	5.1	kW	Operation limit temperature	TOL	-30	°C			
Degradation co-efficient (**)	Cdh	0.97	-	Heating water operating limit temperature	WTOL	60	°C			
Tj = bivalent temperature	Pdh	14.0	kW	Supplementary heater						
Tj = operation limit temperature (***)	Pdh	14.0	kW	Rated heat output (*)	Psup	0.0	kW			
Bivalent temperature	Tbiv	2	°C	Type of energy input	Electrical					
Reference design conditions for space heating	Tdesignh	2	°C							
Power consumption in modes other than active mode										
Off mode	P _{OFF}	0.022	kW							
Thermostat-off mode	P _{TO}	0.022	kW							
Standby mode	P _{SB}	0.022	kW							
Crankcase heater mode	P _{CK}	0.000	kW							
Other items										
Capacity control	variable			Rated air flow rate, outdoors		-	2640 m ³ /h			
Sound power level, indoors/outdoors	L _{WA}	41 / 58	dB							
Annual energy consumption	Q _{HE}	3319	kWh							

For heat pump combination heater:

Declared load profile	XL		Water heating energy efficiency	ηwh	130	%
Daily electricity consumption	Qelec	6.520	kWh			
Annual electricity consumption	AEC	1434	kWh			

Contact details

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY	Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre – Manisa, Turkey
---	---

The identification and signature of the person empowered to bind the supplier;

Kenichi SAITO

Manager, Quality Assurance Department

TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUZ-SHWM140YAA	
	Indoor unit:	ERST30D-***D	
Air-to-water heat pump:	yes		
Water-to-water heat pump:	no		
Brine-to-water heat pump:	no		
Low-temperature heat pump:	no		
Equipped with a supplementary heater:	yes		
Heat pump combination heater:	yes		
Parameters for	medium-temperature application.		
Parameters for	average climate conditions.		

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit			
Rated heat output (*)	Prated	14.0	kW	Seasonal space heating energy efficiency	ηs	142	%			
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj										
Tj = - 7 °C	Pdh	12.4	kW	Tj = - 7 °C	COPd	2.18	-			
Degradation co-efficient (**)	Cdh	1.00	-	Tj = + 2 °C	COPd	3.49	-			
Tj = + 2 °C	Pdh	7.5	kW	Tj = + 7 °C	COPd	4.85	-			
Degradation co-efficient (**)	Cdh	0.99	-	Tj = +12 °C	COPd	6.61	-			
Tj = + 7 °C	Pdh	6.3	kW	Tj = bivalent temperature	COPd	1.92	-			
Degradation co-efficient (**)	Cdh	0.98	-	Tj = operation limit temperature (***)	COPd	1.92	-			
Tj = +12 °C	Pdh	3.9	kW	Operation limit temperature	TOL	-30	°C			
Degradation co-efficient (**)	Cdh	0.96	-	Heating water operating limit temperature	WTOL	60	°C			
Tj = bivalent temperature	Pdh	14.0	kW	Supplementary heater						
Tj = operation limit temperature (***)	Pdh	14.0	kW	Rated heat output (*)	Psup	0.0	kW			
Bivalent temperature	Tbiv	-10	°C	Type of energy input	Electrical					
Reference design conditions for space heating	Tdesignh	-10	°C							
Power consumption in modes other than active mode										
Off mode	P _{OFF}	0.022	kW							
Thermostat-off mode	P _{TO}	0.022	kW							
Standby mode	P _{SB}	0.022	kW							
Crankcase heater mode	P _{CK}	0.000	kW							

Other items

Capacity control	variable			Rated air flow rate, outdoors	-	2640	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 58	dB				
Annual energy consumption	Q _{HE}	7974	kWh				

For heat pump combination heater:

Declared load profile	XL			Water heating energy efficiency	ηwh	114	%
Daily electricity consumption	Qelec	7.320	kWh				
Annual electricity consumption	AEC	1610	kWh				

Contact details

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY	Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre – Manisa, Turkey
---	---

The identification and signature of the person empowered to bind the supplier:

Kenichi SAITO

Manager, Quality Assurance Department

TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUZ-SHWM140YAA	
	Indoor unit:	ERST30D-***D	
Air-to-water heat pump:	yes		
Water-to-water heat pump:	no		
Brine-to-water heat pump:	no		
Low-temperature heat pump:	no		
Equipped with a supplementary heater:	yes		
Heat pump combination heater:	yes		
Parameters for	low-temperature application.		
Parameters for	average climate conditions.		

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit			
Rated heat output (*)	Prated	14.0	kW	Seasonal space heating energy efficiency	ηs	184	%			
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj										
Tj = - 7 °C	Pdh	12.4	kW	Tj = - 7 °C	COPd	3.00	-			
Degradation co-efficient (**)	Cdh	1.00	-	Tj = + 2 °C	COPd	4.59	-			
Tj = + 2 °C	Pdh	7.5	kW	Tj = + 7 °C	COPd	6.00	-			
Degradation co-efficient (**)	Cdh	0.99	-	Tj = +12 °C	COPd	7.19	-			
Tj = + 7 °C	Pdh	6.4	kW	Tj = bivalent temperature	COPd	2.55	-			
Degradation co-efficient (**)	Cdh	0.98	-	Tj = operation limit temperature (***)	COPd	2.55	-			
Tj = +12 °C	Pdh	4.1	kW	Operation limit temperature	TOL	-30	°C			
Degradation co-efficient (**)	Cdh	0.96	-	Heating water operating limit temperature	WTOL	60	°C			
Tj = bivalent temperature	Pdh	14.0	kW	Supplementary heater						
Tj = operation limit temperature (***)	Pdh	14.0	kW	Rated heat output (*)	Psup	0.0	kW			
Bivalent temperature	Tbiv	-10	°C	Type of energy input	Electrical					
Reference design conditions for space heating	Tdesignh	-10	°C							
Power consumption in modes other than active mode										
Off mode	P _{OFF}	0.022	kW							
Thermostat-off mode	P _{TO}	0.022	kW							
Standby mode	P _{SB}	0.022	kW							
Crankcase heater mode	P _{CK}	0.000	kW							

Other items

Capacity control	variable			Rated air flow rate, outdoors	-	2640	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 58	dB				
Annual energy consumption	Q _{HE}	6181	kWh				

For heat pump combination heater:

Declared load profile	XL			Water heating energy efficiency	ηwh	114	%
Daily electricity consumption	Qelec	7.320	kWh				
Annual electricity consumption	AEC	1610	kWh				

Contact details

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY	Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre – Manisa, Turkey
---	---

The identification and signature of the person empowered to bind the supplier;

Kenichi SAITO

Manager, Quality Assurance Department

TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUZ-SHWM140YAA	
	Indoor unit:	ERST30D-***D	
Air-to-water heat pump:	yes		
Water-to-water heat pump:	no		
Brine-to-water heat pump:	no		
Low-temperature heat pump:	no		
Equipped with a supplementary heater:	yes		
Heat pump combination heater:	yes		
Parameters for	medium-temperature application.		
Parameters for	colder climate conditions.		

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	14.0	kW	Seasonal space heating energy efficiency	η_s	116	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj							
Tj = - 7 °C	Pdh	8.5	kW	Tj = - 7 °C	COPd	2.63	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = + 2 °C	COPd	3.49	-
Tj = + 2 °C	Pdh	5.2	kW	Tj = + 7 °C	COPd	4.40	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = +12 °C	COPd	6.92	-
Tj = + 7 °C	Pdh	4.2	kW	Tj = bivalent temperature	COPd	1.53	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = operation limit temperature (***)	COPd	1.55	-
Tj = +12 °C	Pdh	4.2	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	1.52	-
Degradation co-efficient (**)	Cdh	0.96	-	Operation limit temperature	TOL	-30	°C
Tj = bivalent temperature	Pdh	11.8	kW	Heating water operating limit temperature	WTOL	60	°C
Tj = operation limit temperature (***)	Pdh	10.7	kW				
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	11.4	kW				
Bivalent temperature	Tbiv	-16	°C				
Reference design conditions for space heating	Tdesignh	-22	°C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	Psup	3.3	kW
Thermostat-off mode	P _{TO}	0.022	kW	Type of energy input		Electrical	
Standby mode	P _{SB}	0.022	kW				
Crankcase heater mode	P _{CK}	0.000	kW				
Other items							
Capacity control		variable		Rated air flow rate, outdoors		-	2640 m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 58	dB				
Annual energy consumption	Q _{HE}	11625	kWh				

For heat pump combination heater:						
Declared load profile		XL		Water heating energy efficiency	η_{wh}	104 %
Daily electricity consumption	Qelec	7.980	kWh			
Annual electricity consumption	AEC	1755	kWh			

Contact details		
MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY		Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre – Manisa, Turkey

The identification and signature of the person empowered to bind the supplier;

Kenichi SAITO

Manager, Quality Assurance Department

TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUZ-SHWM140YAA	
	Indoor unit:	ERST30D-***D	
Air-to-water heat pump:	yes		
Water-to-water heat pump:	no		
Brine-to-water heat pump:	no		
Low-temperature heat pump:	no		
Equipped with a supplementary heater:	yes		
Heat pump combination heater:	yes		
Parameters for	low-temperature application.		
Parameters for	colder climate conditions.		

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	14.0	kW	Seasonal space heating energy efficiency	η_s	154	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj							
Tj = - 7 °C	Pdh	8.3	kW	Tj = - 7 °C	COPd	3.65	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = + 2 °C	COPd	4.59	-
Tj = + 2 °C	Pdh	5.2	kW	Tj = + 7 °C	COPd	5.15	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = +12 °C	COPd	8.80	-
Tj = + 7 °C	Pdh	4.6	kW	Tj = bivalent temperature	COPd	2.03	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = operation limit temperature (***)	COPd	1.79	-
Tj = +12 °C	Pdh	4.3	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	2.05	-
Degradation co-efficient (**)	Cdh	0.96	-	Operation limit temperature	TOL	-30	°C
Tj = bivalent temperature	Pdh	11.8	kW	Heating water operating limit temperature	WTOL	60	°C
Tj = operation limit temperature (***)	Pdh	10.7	kW				
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	11.4	kW				
Bivalent temperature	Tbiv	-16	°C				
Reference design conditions for space heating	Tdesignh	-22	°C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	Psup	3.3	kW
Thermostat-off mode	P _{TO}	0.022	kW	Type of energy input		Electrical	
Standby mode	P _{SB}	0.022	kW				
Crankcase heater mode	P _{CK}	0.000	kW				
Other items							
Capacity control		variable		Rated air flow rate, outdoors	-	2640	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 58	dB				
Annual energy consumption	Q _{HE}	8816	kWh				

For heat pump combination heater:							
Declared load profile		XL		Water heating energy efficiency	η_{wh}	104	%
Daily electricity consumption	Qelec	7.980	kWh				
Annual electricity consumption	AEC	1755	kWh				
Contact details							

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY	Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre – Manisa, Turkey
---	---

The identification and signature of the person empowered to bind the supplier;

Kenichi SAITO

Manager, Quality Assurance Department

TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUZ-SHWM140YAA	
	Indoor unit:	ERST30D-***D	
Air-to-water heat pump:	yes		
Water-to-water heat pump:	no		
Brine-to-water heat pump:	no		
Low-temperature heat pump:	no		
Equipped with a supplementary heater:	yes		
Heat pump combination heater:	yes		
Parameters for	medium-temperature application.		
Parameters for	warmer climate conditions.		

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit			
Rated heat output (*)	Prated	14.0	kW	Seasonal space heating energy efficiency	ηs	158	%			
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj										
Tj = - 7 °C	Pdh	-	kW	Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj	COPd	-	-			
Degradation co-efficient (**)	Cdh	-	-	Tj = - 7 °C	COPd	2.00	-			
Tj = + 2 °C	Pdh	14.0	kW	Tj = + 2 °C	COPd	3.27	-			
Degradation co-efficient (**)	Cdh	1.00	-	Tj = + 7 °C	COPd	5.50	-			
Tj = + 7 °C	Pdh	8.8	kW	Tj = bivalent temperature	COPd	2.00	-			
Degradation co-efficient (**)	Cdh	0.99	-	Tj = operation limit temperature (***)	COPd	2.00	-			
Tj = +12 °C	Pdh	5.5	kW	Operation limit temperature	TOL	-30	°C			
Degradation co-efficient (**)	Cdh	0.98	-	Heating water operating limit temperature	WTOL	60	°C			
Tj = bivalent temperature	Pdh	14.0	kW	Supplementary heater						
Tj = operation limit temperature (***)	Pdh	14.0	kW	Rated heat output (*)	Psup	0.0	kW			
Bivalent temperature	Tbiv	2	°C	Type of energy input	Electrical					
Reference design conditions for space heating	Tdesignh	2	°C							
Power consumption in modes other than active mode										
Off mode	P _{OFF}	0.022	kW							
Thermostat-off mode	P _{TO}	0.022	kW							
Standby mode	P _{SB}	0.022	kW							
Crankcase heater mode	P _{CK}	0.000	kW							

Other items

Capacity control	variable			Rated air flow rate, outdoors	-	2640	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 58	dB				
Annual energy consumption	Q _{HE}	4659	kWh				

For heat pump combination heater:

Declared load profile	XL			Water heating energy efficiency	ηwh	130	%
Daily electricity consumption	Qelec	6.520	kWh				
Annual electricity consumption	AEC	1434	kWh				

Contact details

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY	Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre – Manisa, Turkey
---	---

The identification and signature of the person empowered to bind the supplier;

Kenichi SAITO

Manager, Quality Assurance Department

TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUZ-SHWM140YAA	
	Indoor unit:	ERST30D-***D	
Air-to-water heat pump:	yes		
Water-to-water heat pump:	no		
Brine-to-water heat pump:	no		
Low-temperature heat pump:	no		
Equipped with a supplementary heater:	yes		
Heat pump combination heater:	yes		
Parameters for	low-temperature application.		
Parameters for	warmer climate conditions.		

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit			
Rated heat output (*)	Prated	14.0	kW	Seasonal space heating energy efficiency	ηs	229	%			
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj										
Tj = - 7 °C	Pdh	-	kW	Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj	COPd	-	-			
Degradation co-efficient (**)	Cdh	-	-	Tj = - 7 °C	COPd	3.24	-			
Tj = + 2 °C	Pdh	14.0	kW	Tj = + 2 °C	COPd	5.15	-			
Degradation co-efficient (**)	Cdh	1.00	-	Tj = + 7 °C	COPd	7.18	-			
Tj = + 7 °C	Pdh	9.0	kW	Tj = bivalent temperature	COPd	3.24	-			
Degradation co-efficient (**)	Cdh	0.99	-	Tj = operation limit temperature (***)	COPd	3.24	-			
Tj = +12 °C	Pdh	5.1	kW	Operation limit temperature	TOL	-30	°C			
Degradation co-efficient (**)	Cdh	0.97	-	Heating water operating limit temperature	WTOL	60	°C			
Tj = bivalent temperature	Pdh	14.0	kW	Supplementary heater						
Tj = operation limit temperature (***)	Pdh	14.0	kW	Rated heat output (*)	Psup	0.0	kW			
Bivalent temperature	Tbiv	2	°C	Type of energy input	Electrical					
Reference design conditions for space heating	Tdesignh	2	°C							
Power consumption in modes other than active mode										
Off mode	P _{OFF}	0.022	kW							
Thermostat-off mode	P _{TO}	0.022	kW							
Standby mode	P _{SB}	0.022	kW							
Crankcase heater mode	P _{CK}	0.000	kW							

Other items

Capacity control	variable			Rated air flow rate, outdoors	-	2640	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 58	dB				
Annual energy consumption	Q _{HE}	3222	kWh				

For heat pump combination heater:

Declared load profile	XL			Water heating energy efficiency	ηwh	130	%
Daily electricity consumption	Qelec	6.520	kWh				
Annual electricity consumption	AEC	1434	kWh				

Contact details

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY	Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre – Manisa, Turkey
---	---

The identification and signature of the person empowered to bind the supplier;

Kenichi SAITO

Manager, Quality Assurance Department

TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.