




ENERG  
енергия · ενεργεια



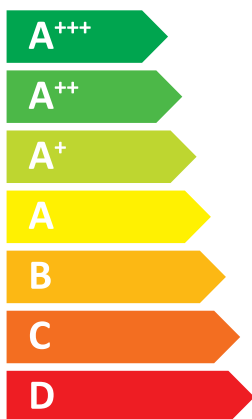
Indoor unit  
Outdoor unit

E\*SD-\*\*\*\*D  
PUZ-SWM80VAA



55 °C

35 °C



A<sup>++</sup>

A<sup>+++</sup>



41 dB



54 dB

■ 08  
■ **08**  
■ 08  
kW

■ 08  
■ **08**  
■ 08  
kW



2019

811/2013

DG79V342H02

1		2		For medium-temperature application															For low-temperature application														
Outdoor unit	Indoor unit	3	6	8	11	9	13	15	16	21	22	17	18	25	4	6	8	11	9	13	15	16	21	22	17	18	25						
		Medium-temperature application															Low-temperature application																
		Seasonal space heating energy efficiency class															Seasonal space heating energy efficiency class																
		Rated heat output under average climate conditions															Rated heat output under average climate conditions																
		Seasonal space heating energy efficiency under average climate conditions															Seasonal space heating energy efficiency under average climate conditions																
		For space heating, annual energy consumption under average climate conditions															For space heating, annual energy consumption under average climate conditions																
		Sound power level L <sub>WA</sub> , indoor															Sound power level L <sub>WA</sub> , indoor																
		Rated heat output under warmer climate conditions															Rated heat output under warmer climate conditions																
		Seasonal space heating energy efficiency under warmer climate conditions															Seasonal space heating energy efficiency under warmer climate conditions																
		For space heating, annual energy consumption under warmer climate conditions															For space heating, annual energy consumption under warmer climate conditions																
		Sound power level L <sub>WA</sub> , outdoor															Sound power level L <sub>WA</sub> , outdoor																
		Low-temperature application															Low-temperature application																
		Seasonal space heating energy efficiency class															Seasonal space heating energy efficiency class																
		Rated heat output under average climate conditions															Rated heat output under average climate conditions																
		Seasonal space heating energy efficiency under average climate conditions															Seasonal space heating energy efficiency under average climate conditions																
		For space heating, annual energy consumption under average climate conditions															For space heating, annual energy consumption under average climate conditions																
		Sound power level L <sub>WA</sub> , indoor															Sound power level L <sub>WA</sub> , indoor																
		Rated heat output under colder climate conditions															Rated heat output under colder climate conditions																
		Seasonal space heating energy efficiency under colder climate conditions															Seasonal space heating energy efficiency under colder climate conditions																
		For space heating, annual energy consumption under colder climate conditions															For space heating, annual energy consumption under colder climate conditions																
		Sound power level L <sub>WA</sub> , outdoor															Sound power level L <sub>WA</sub> , outdoor																
PUZ-SWM60VAA	EHS-****D	✓	A++	6	126	3834	41	6	6	111	150	5181	2093	54	✓	A+++	6	181	2701	41	6	6	135	208	4284	1519	54						
	ERSD-****D	✓	A++	6	128	3779	41	6	6	112	155	5147	2027	54	✓	A+++	6	184	2646	41	6	6	136	218	4251	1453	54						
PUZ-SWM80VAA	EHS-****D	✓	A++	8	129	5016	41	8	8	111	162	6890	2584	54	✓	A+++	8	181	3599	41	8	8	141	219	5460	1928	54						
	ERSD-****D	✓	A++	8	130	4961	41	8	8	112	167	6857	2517	54	✓	A+++	8	184	3543	41	8	8	142	227	5427	1862	54						
PUZ-SWM80YAA	EHS-****D	✓	A++	8	128	5053	41	8	8	111	160	6923	2629	54	✓	A+++	8	179	3636	41	8	8	141	214	5493	1973	54						
	ERSD-****D	✓	A++	8	130	4972	41	8	8	112	166	6875	2532	54	✓	A+++	8	183	3555	41	8	8	142	225	5444	1876	54						
PUZ-SWM100VAA	EHS-****D	✓	A++	10	132	6106	41	10	10	109	156	8813	3362	58	✓	A+++	10	178	4564	41	10	10	147	223	6575	2369	58						
	ERSD-****D	✓	A++	10	134	6051	41	10	10	109	159	8780	3296	58	✓	A+++	10	180	4509	41	10	10	147	229	6555	2302	58						
PUZ-SWM100YAA	EHS-****D	✓	A++	10	132	6141	41	10	10	109	154	8840	3405	58	✓	A+++	10	177	4600	41	10	10	146	219	6601	2411	58						
	ERSD-****D	✓	A++	10	133	6061	41	10	10	109	159	8791	3308	58	✓	A+++	10	180	4519	41	10	10	147	228	6565	2314	58						
PUZ-SWM120VAA	EHS-****D	✓	A++	12	131	7450	41	12	12	109	154	10673	4115	58	✓	A+++	12	177	5566	41	12	12	141	221	8290	2882	58						
	ERSD-****D	✓	A++	12	132	7395	41	12	12	109	157	10640	4049	58	✓	A+++	12	178	5511	41	12	12	141	227	8257	2816	58						
PUZ-SWM120YAA	EHS-****D	✓	A++	12	131	7485	41	12	12	109	153	10698	4157	58	✓	A+++	12	176	5600	41	12	12	140	218	8316	2922	58						
	ERSD-****D	✓	A++	12	132	7404	41	12	12	109	156	10649	4060	58	✓	A+++	12	178	5520	41	12	12	141	226	8267	2825	58						
PUZ-SWM140VAA	EHS-****D	✓	A++	14	134	8438	41	14	14	104	150	12843	4893	58	✓	A+++	14	175	6483	41	14	14	132	219	10250	3367	58						
	ERSD-****D	✓	A++	14	135	8383	41	14	14	105	152	12810	4826	58	✓	A+++	14	177	6428	41	14	14	132	224	10217	3301	58						
PUZ-SWM140YAA	EHS-****D	✓	A++	14	134	8473	41	14	14	104	149	12867	4934	58	✓	A+++	14	175	6517	41	14	14	131	217	10275	3407	58						
	ERSD-****D	✓	A++	14	135	8392	41	14	14	105	152	12819	4837	58	✓	A+++	14	177	6437	41	14	14	132	223	10226	3310	58						
PUZ-SHWM60VAA	EHS-****D	✓	A++	6	129	3761	41	6	6	115	159	4993	1980	54	✓	A+++	6	184	2655	41	6	6	138	220	4202	1437	54						
	ERSD-****D	✓	A++	6	131	3706	41	6	6	116	165	4960	1914	54	✓	A+++	6	188	2600	41	6	6	139	231	4168	1371	54						
PUZ-SHWM80VAA	EHS-****D	✓	A++	8	132	4904	41	8	8	115	167	6705	2521	54	✓	A+++	8	184	3530	41	8	8	146	225	5299	1874	54						
	ERSD-****D	✓	A++	8	133	4849	41	8	8	115	171	6672	2454	54	✓	A+++	8	187	3475	41	8	8	147	233	5266	1808	54						
PUZ-SHWM80YAA	EHS-****D	✓	A++	8	131	4941	41	8	8	114	164	6737	2566	54	✓	A+++	8	182	3568	41	8	8	145	220	5332	1920	54						
	ERSD-****D	✓	A++	8	133	4860	41	8	8	115	170	6689	2469	54	✓	A+++	8	187	3487	41	8	8	146	232	5284	1823	54						
PUZ-SHWM100VAA	EHS-****D	✓	A++	10	136	5936	41	10	10	116	164	8272	3204	58	✓	A+++	10	183	4444	41	10	10	149	236	6480	2233	58						
	ERSD-****D	✓	A++	10	138	5881	41	10	10	117	167	8239	3138	58	✓	A+++	10	185	4389	41	10	10	150	244	6447	2167	58						
PUZ-SHWM100YAA	EHS-****D	✓	A++	10	135	5972	41	10	10	116	162	8298	3246	58	✓	A+++	10	181	4480	41	10	10	149	232	6508	2276	58						
	ERSD-****D	✓	A++	10	137	5891	41	10	10	117	167	8250	3149	58	✓	A+++	10	185	4399	41	10	10	150	242	6459	2179	58						
PUZ-SHWM120VAA	EHS-****D	✓	A++	12	136	7169	41	12	12	117	161	9902	3952	58	✓	A+++	12	179	5481	41	12	12	149	232	7843	2753	58						
	ERSD-****D	✓	A++	12	138	7114	41	12	12	118	163	9869	3886	58	✓	A+++	12	181	5426	41	12	12	150	238	7810	2687	58						
PUZ-SHWM120YAA	EHS-****D	✓	A++	12	136	7204	41	12	12	117	159	9927	3995	58	✓	A+++	12	178	5516	41	12	12	149	238	7868	2793	58						
	ERSD-****D	✓	A++	12	137	7123	41	12	12	118	163	9878	3898	58	✓	A+++	12	181	5435	41	12	12	150	237	7819	2696	58						
PUZ-SHWM140VAA	EHS-****D	✓	A++	14	141	8021	41	14	14	115	156	11650	4715	58	✓	A+++	14	183	6227	41	14	14	153	225	8841	3219	58						
	ERSD-****D	✓	A++	14	142	7965	41	14	14	116	158	11617	4649	58	✓	A+++	14	184	6172	41	14	14	154	230	8807	3272	58						
PUZ-SHWM140YAA	EHS-****D	✓	A++	14	141	8055	41	14	14	115	154	11674	4757	58	✓	A+++	14	182	6262	41	14	14	153	222	8865	3319	58						
	ERSD-****D	✓	A++	14	142	7974	41	14	14	116	158	11625	4659	58	✓	A+++	14	184	6181	41	14	14	154	229	8816	3222	58						



	English	Deutsch	Français	Italiano	Espanol
	Nederlands	Svenska	Dansk	Português	Ελληνικά
	suomi	Čeština	Български	Polski	Ελληνικά
	Outdoor unit	Außengerät	unité extérieure	unità esterna	unidad exterior
1	builteunit	Umluftenhet	Unités exterie	unidad exterior	Εξωτερική μονάδα
	Ulkoyksikkö	Vänkonst ierjotika	Външно тѣло	jednostka zewnętrzna	-
2	indoor unit	Innengerät	unité intérieure	unità interna	unidad interior
	sisäyksikkö	Innluftenhet	Indoorske enhed	intende interior	Εσωτερική μονάδα
	Seasonal	Stagungszeit	сезонная	jednostka wewnętrzna	-
	Medium-temperature application	Mitteltemperatulanwendung	l'application à moyenne température	la aplicación a media temperatura	la aplicación de media temperatura
3	middle-temperature-boasting	mitteltemperaturapplikation	middletemperatulanviesien	a aplicacão a media temperatura	η εφαρμογή σε μέση θερμοκρασία
	keshilampilaan sovellus	středněteplotní aplikace	среднотемпературного приложени	zastosowanie w średniej temperaturze	η εφαρμογή σε χαμηλή θερμοκρασία
4	low-temperature application	Niedertemperaturanwendung	l'application à basse température	la aplicación a bassa temperatura	la aplicación de baja temperatura
	lagedämpelämpölämpösovellus	lagedtemperaturapplikation	lagedtemperatuuril propojeni	a aplicacão a baixa temperatura	η εφαρμογή σε υψηλή θερμοκρασία
5	Decided load profile	Ausgewerkes Lastprofil	Profil de soudege decide	Profilo di carico dichiarato	Perfil de carga declarado
	Spregeven capaciteitsprofiel	Deklarerat belastningsprofil	Audget kapaciteitsprofil	Perfil de carga declarado	Δηλωτικό προφίλ φορτίου
	limoietu kuormitusprofiili	Deklareratu zătezu profil	Объявен товарноу профил	Declaraçao profil dozeiden	-
	Seasonal space heating energy efficiency class	die klasse für die jahreszeitbedingte Raumheizungs-Energieeffizienz	la classe d'efficacitee energetique saisonniere, pour le chauffage des locaux	la classe d'efficacitea energetica stagionale del riscaldamento d'ambiente	la clase de eficiencia energetica estacional de calefaccion
6	de seizoengebonden energie-efficiëntieklasse voor ruimteverwarming	saisonsgesetende energieefficiëntieklasse voor ruimteverwarming	la classe d'efficacité énergétique uet limpurvarmimng	a aplicacão a media temperatura	η τήξη ενεργειακής απόδοσης της εποχιακής θερμότητας χώρου
	Iltaimittimykseen kuusitainen energiatilokkuluksilimasto-olosuhteissa	Itäaasonni energetiska účinnost vyláreni	класъ на сезонната отоплителна енергийна ефективност	klasa sezonowej efektywnosci energetycznej ogrzewania pomieszczen	la clase de eficiencia energetica del riscaldamento dell'acqua
	Water heating energy efficiency class	die klasse für die Warmwasserbereitungs-Energieeffizienz	la classe d'efficacitee energetique, pour le chauffage de l'eau	a classe de eficiencia energetica del riscaldamento dell'acqua	la clase de eficiencia energetica del calentamiento de agua
7	de energie-efficiëntieklasse voor waterverwarming	energieefficiëntieklasse uel valenpurvarmimng	класъ на енергийната ефективност при поддържане на вода	klasa efektywnosci energetycznej podgrzewania wody	-
	vedenlämmitykseen energiatilokkuluksiluokka	Itäa energetiska účinnost ohevu vodu	la russionea l'etmque pour le chauffage de l'eau, dans les conditions climatiques pour le chauffage de l'eau, la consommation annuelle d'électricité(dans les conditions climatiques moyennes)	la robena temica nominala(n condiziozi climatiche medie)	-
8	Rated heat output under average climate conditions	die Warmwasserleistung bei durchschnittlichen Klimaverhältnissen	la puissance l'etmque pour le chauffage de l'eau, dans les conditions climatiques moyennes	la robena temica nominala(n condiziozi climatiche medie)	-
	de nominale warmteafgifte(onder gemiddelde klimaatomstandigheden)	Den nominela wuquina varmeeffekt(en)der gemiddelliga klimaatförhållanden	den nominelle puissance(l'under gemiddetsnillige klimaatforid)	A robena salonica nominala(n condiziozi climatiche medie)	-
	Ilmestilamittimykseen keskimääräisissä ilmastio-olosuhteissa	Ilmestilamittimykseen keskimääräisissä ilmastio-olosuhteissa	Ilmestilamittimykseen keskimääräisissä ilmastio-olosuhteissa	A robena salonica nominala(n condiziozi climatiche medie)	-
	For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	-
9	voor ruimteverwarming, het jaarlijkse energieverbruik(onder gemiddelde klimaatomstandigheden)	For ruimteverwarming, årlig energiforbruk(under gemiddelliga klimaatförhållanden)	For ruimteverwarming, årlig energiforbruk(under gemiddelliga klimaatförhållanden)	For ruimteverwarming, årlig energiforbruk(under gemiddelliga klimaatförhållanden)	-
	Iltaimittimykseen vuotuinen energiantuutus(keskimääräisissä ilmastio-olosuhteissa)	pro vyláreni – roční spotřeba energie za průměrných klimatických podmínek	pro vyláreni – roční spotřeba energie za průměrných klimatických podmínek	pro vyláreni – roční spotřeba energie za průměrných klimatických podmínek	-
	Water heating energy efficiency under average climate conditions	die Warmwasserbereitungs-Energieeffizienz bei durchschnittlichen Klimaverhältnissen	la puissance l'etmque pour le chauffage de l'eau(dans les conditions climatiques moyennes)	a l'efficacitee energetique pour le chauffage de l'eau(dans les conditions climatiques moyennes)	-
12	de energie-efficiëntie voor waterverwarming(onder gemiddelde klimaatomstandigheden)	Energieefficiëntie uel valenpurvarmimng(uel gemiddelliga klimaatförhållanden)	energieefficiëntie uel valenpurvarmimng(under gemiddetsnillige klimaatförhållanden)	a l'efficacitee energetique uel valenpurvarmimng(under gemiddetsnillige klimaatförhållanden)	-
	vedenlämmitykseen energiatilokkuluks(keskimääräisissä ilmastio-olosuhteissa)	energetiska účinnost ohevu vodu za průměrných klimatických podmínek	energetická účinnost ohevu vodu za průměrných klimatických podmínek	energetická účinnost ohevu vodu za průměrných klimatických podmínek	-
13	Sound power level L <sub>WA</sub> indoor	der Schalleistungspegel L <sub>WA</sub> in Gebäuden	le niveau de puissance acoustique L <sub>WA</sub> à l'intérieur	il livello di potenza sonora L <sub>WA</sub> all'interno	-
	hät gelütsvermogensniveau L <sub>WA</sub> binnen	Ludeefektiva L <sub>WA</sub> i omhus	l'udelfektivnede L <sub>WA</sub> i inde	O nivel de robena sonora L <sub>WA</sub> no interior	-
	Ääniteho L <sub>WA</sub> sisällä	hadina akustického výkonu L <sub>WA</sub> ve vnitřním prostoru	hadina akustického výkonu L <sub>WA</sub> ve vnitřním prostoru	hadina akustického výkonu L <sub>WA</sub> w pomieszczeniu	-
14	Work only during off-peak hours	dies en ausschließlicher Betrieb des Kombiheizgerätes zu Schwachlastzeiten	funcionare doar în beurea sculeas	funcionare soltanto durante le ore notie	-
	Work only during off-peak hours	dies en ausschließlicher Betrieb des Kombiheizgerätes zu Schwachlastzeiten	funcionare doar în beurea sculeas	funcionare soltanto durante le ore notie	-
	Weeken uitsluitend in de daluren	dies en ausschließlicher Betrieb des Kombiheizgerätes zu Schwachlastzeiten	funcionare doar în beurea sculeas	funcionare soltanto durante le ore notie	-
	komman anovaan kuluksitruvujen ulkoruokela	provoz pouze mimo spuku	работи само в часовете наван върхувоу неговарване	de l'opoziea anovaante fora das horas de pico	-
	Rated heat output under colder climate conditions	die Warmwasserleistung bei kalteren Klimaverhältnissen	la puissance l'etmque pour le chauffage de l'eau, dans les conditions climatiques plus foides	a robena temica nominala(n condiziozi climatiche piu foidde)	-
15	de nominale warmteafgifte, onder koudere klimaatomstandigheden	Nominel wuquina varmeeffekt uel kaltere klimaatförhållanden	den nominelle puissance(l'etmque uel kaltere klimaatförhållanden)	A robena salonica nominala(n condiziozi climatiche plus foidde)	-
	Ilmestilamittimykseen keskimääräisissä ilmastio-olosuhteissa	Ilmestilamittimykseen keskimääräisissä ilmastio-olosuhteissa	Ilmestilamittimykseen keskimääräisissä ilmastio-olosuhteissa	Ilmestilamittimykseen keskimääräisissä ilmastio-olosuhteissa	-
	Rated heat output under warmer climate conditions	die Warmwasserleistung bei wärmeren Klimaverhältnissen	la puissance l'etmque pour le chauffage de l'eau, dans les conditions climatiques plus chaudes	a robena temica nominala(n condiziozi climatiche plus chaudes)	-
16	de nominale warmteafgifte, onder warmere klimaatomstandigheden	Nominel wuquina varmeeffekt uel wärmeren Klimaatförhållanden	den nominelle puissance(l'etmque uel wärmeren Klimaatförhållanden)	A robena salonica nominala(n condiziozi climatiche plus chaudes)	-
	Ilmestilamittimykseen vuotuinen energiantuutus(ilmasto-olosuhteissa)	Ilmestilamittimykseen vuotuinen energiantuutus(ilmasto-olosuhteissa)	Ilmestilamittimykseen vuotuinen energiantuutus(ilmasto-olosuhteissa)	Ilmestilamittimykseen vuotuinen energiantuutus(ilmasto-olosuhteissa)	-
	For space heating, annual energy consumption under colder climate conditions	For space heating, annual energy consumption under colder climate conditions	For space heating, annual energy consumption under colder climate conditions	For space heating, annual energy consumption under colder climate conditions	-
17	voor ruimteverwarming, het jaarlijkse energieverbruik onder koudere klimaatomstandigheden	For ruimteverwarming, årlig energiforbruk(under kaltere klimaatförhållanden)	For ruimteverwarming, årlig energiforbruk(under kaltere klimaatförhållanden)	For ruimteverwarming, årlig energiforbruk(under kaltere klimaatförhållanden)	-
	Iltaimittimykseen vuotuinen energiantuutus kylmissä ilmastio-olosuhteissa	pro vyláreni – roční spotřeba energie za chladnější klimatických podmínek	pro vyláreni – roční spotřeba energie za chladnější klimatických podmínek	pro vyláreni – roční spotřeba energie za chladnější klimatických podmínek	-
	For space heating, annual energy consumption under warmer climate conditions	For space heating, årlig energiforbruk(under wärmeren Klimaatförhållanden)	For space heating, årlig energiforbruk(under wärmeren Klimaatförhållanden)	For space heating, årlig energiforbruk(under wärmeren Klimaatförhållanden)	-
18	voor ruimteverwarming, het jaarlijkse energieverbruik onder warmere klimaatomstandigheden	For ruimteverwarming, årlig energiforbruk(under wärmeren Klimaatförhållanden)	For ruimteverwarming, årlig energiforbruk(under wärmeren Klimaatförhållanden)	For ruimteverwarming, årlig energiforbruk(under wärmeren Klimaatförhållanden)	-
	Iltaimittimykseen vuotuinen energiantuutus lämpimissä ilmastio-olosuhteissa	pro vyláreni – roční spotřeba energie za teplejších klimatických podmínek	pro vyláreni – roční spotřeba energie za teplejších klimatických podmínek	pro vyláreni – roční spotřeba energie za teplejších klimatických podmínek	-
	For water heating, annual energy consumption under colder climate conditions	For water heating, årlig energiforbruk(under kaltere Klimaatförhållanden)	For water heating, årlig energiforbruk(under kaltere Klimaatförhållanden)	For water heating, årlig energiforbruk(under kaltere Klimaatförhållanden)	-
19	voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder koudere klimaatomstandigheden	For waterverwarming, årlig elforbruk(under kaltere Klimaatförhållanden)	For waterverwarming, årlig elforbruk(under kaltere Klimaatförhållanden)	For waterverwarming, årlig elforbruk(under kaltere Klimaatförhållanden)	-
	vedenlämmitykseen vuotuinen sähkökuluks kylmissä ilmastio-olosuhteissa	pro ohevu vodu – roční spotřeba elektrické energie za chladnější klimatických podmínek	pro ohevu vodu – roční spotřeba elektrické energie za chladnější klimatických podmínek	pro ohevu vodu – roční spotřeba elektrické energie za chladnější klimatických podmínek	-
	For water heating, annual energy consumption under warmer climate conditions	For water heating, årlig energiforbruk(under wärmeren Klimaatförhållanden)	For water heating, årlig energiforbruk(under wärmeren Klimaatförhållanden)	For water heating, årlig energiforbruk(under wärmeren Klimaatförhållanden)	-
20	voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder warmere klimaatomstandigheden	For waterverwarming, årlig elforbruk(under wärmeren Klimaatförhållanden)	For waterverwarming, årlig elforbruk(under wärmeren Klimaatförhållanden)	For waterverwarming, årlig elforbruk(under wärmeren Klimaatförhållanden)	-
	vedenlämmitykseen vuotuinen sähkökuluks lämpimissä ilmastio-olosuhteissa	pro ohevu vodu – roční spotřeba elektrické energie za teplejších klimatických podmínek	pro ohevu vodu – roční spotřeba elektrické energie za teplejších klimatických podmínek	pro ohevu vodu – roční spotřeba elektrické energie za teplejších klimatických podmínek	-
	Seasonal space heating energy efficiency under colder climate conditions	die jahreszeitbedingte Raumheizungs-Energieeffizienz bei kalteren Klimaverhältnissen	la puissance l'etmque pour le chauffage de l'eau, dans les conditions climatiques plus foides	la robena temica nominala(n condiziozi climatiche plus foidde)	-
21	de seizoengebonden energie-efficiëntie voor ruimteverwarming onder koudere klimaatomstandigheden	Säsongsnedsketkningsgrad för rumsuppvärmimng under kalare Klimaatförhållanden	сезонната енергийна ефективност при отопление при по-студени климатични условия	сезонная энергияна эффективность при отопление при по-студени климатични условия	-
	Iltaimittimykseen kuusitainen energiatilokkuluks kylmissä ilmastio-olosuhteissa	sezonni energetiska účinnost vyláreni za chladnější klimatických podmínek	sezonni energetiska účinnost vyláreni za chladnější klimatických podmínek	sezonni energetiska účinnost vyláreni za chladnější klimatických podmínek	-
	Seasonal space heating energy efficiency under warmer climate conditions	die jahreszeitbedingte Raumheizungs-Energieeffizienz bei wärmeren Klimaverhältnissen	la puissance l'etmque pour le chauffage de l'eau, dans les conditions climatiques plus chaudes	la robena temica nominala(n condiziozi climatiche plus chaudes)	-
22	de seizoengebonden energie-efficiëntie voor ruimteverwarming onder warmere klimaatomstandigheden	Säsongsnedsketkningsgrad för rumsuppvärmimng under wärmeren Klimaatförhållanden	сезонная энергияна эффективность при отоплении при по-топли климатични условия	сезонная энергияна эффективность при отоплении при по-топли климатични условия	-
	Iltaimittimykseen kuusitainen energiatilokkuluks lämpimissä ilmastio-olosuhteissa	sezonni energetiska účinnost vyláreni za teplejších klimatických podmínek	sezonni energetiska účinnost vyláreni za teplejších klimatických podmínek	sezonni energetiska účinnost vyláreni za teplejších klimatických podmínek	-
	Water heating energy efficiency under colder climate conditions	die Warmwasserbereitungs-Energieeffizienz bei kalteren Klimaverhältnissen	la puissance l'etmque pour le chauffage de l'eau, dans les conditions climatiques plus foides	la robena temica nominala(n condiziozi climatiche plus foidde)	-
23	de energie-efficiëntie voor waterverwarming onder koudere klimaatomstandigheden	Energieefficiëntie uel valenpurvarmimng under kaltere Klimaatförhållanden	energieefficiëntie uel valenpurvarmimng under kaltere Klimaatförhållanden	energieefficiëntie uel valenpurvarmimng under kaltere Klimaatförhållanden	-
	vedenlämmitykseen energiatilokkuluks kylmissä ilmastio-olosuhteissa	energetiska účinnost ohevu vodu za chladnější klimatických podmínek	energetická účinnost ohevu vodu za chladnější klimatických podmínek	energetická účinnost ohevu vodu za chladnější klimatických podmínek	-
	Water heating energy efficiency under warmer climate conditions	die Warmwasserbereitungs-Energieeffizienz bei wärmeren Klimaverhältnissen	la puissance l'etmque pour le chauffage de l'eau, dans les conditions climatiques plus chaudes	la robena temica nominala(n condiziozi climatiche plus chaudes)	-
24	de energie-efficiëntie voor waterverwarming onder warmere klimaatomstandigheden	Energieefficiëntie uel valenpurvarmimng under wärmeren Klimaatförhållanden	energieefficiëntie uel valenpurvarmimng under wärmeren Klimaatförhållanden	energieefficiëntie uel valenpurvarmimng under wärmeren Klimaatförhållanden	-
	vedenlämmitykseen energiatilokkuluks lämpimissä ilmastio-olosuhteissa	energetiska účinnost ohevu vodu za teplejších klimatických podmínek	energetická účinnost ohevu vodu za teplejších klimatických podmínek	energetická účinnost ohevu vodu za teplejších klimatických podmínek	-
	Sound power level L <sub>WA</sub> outdoor	der Schalleistungspegel L <sub>WA</sub> im Freien	le niveau de puissance acoustique L <sub>WA</sub> à l'extérieur	il livello di potenza acoustica L <sub>WA</sub> all'esterno	-
25	het gelütsvermogensniveau L <sub>WA</sub> buiten	Ludeefektiva L <sub>WA</sub> utomhus	l'udelfektivnede L <sub>WA</sub> utomhus	O nivel de robena sonora L <sub>WA</sub> no exterior	-
	Ääniteho L <sub>WA</sub> ulkona	hadina akustického výkonu L <sub>WA</sub> ve venkovním prostoru	hadina akustického výkonu L <sub>WA</sub> ve venkovním prostoru	hadina akustického výkonu L <sub>WA</sub> na zemi	-

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SWM80VAA
	Indoor unit:	EHSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	8.0	kW	Seasonal space heating energy efficiency	$\eta_s$	129	%
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj			
Tj = - 7 ° C	Pdh	7.1	kW	Tj = - 7 ° C	COPd	2.27	-
Degradation co-efficient (**)	Cdh	1.00	-				
Tj = + 2 ° C	Pdh	4.4	kW	Tj = + 2 ° C	COPd	3.19	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 7 ° C	Pdh	4.4	kW	Tj = + 7 ° C	COPd	4.18	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = +12 ° C	Pdh	2.8	kW	Tj = +12 ° C	COPd	5.79	-
Degradation co-efficient (**)	Cdh	0.97	-				
Tj = bivalent temperature	Pdh	7.1	kW	Tj = bivalent temperature	COPd	2.27	-
Tj = operation limit temperature (***)	Pdh	7.4	kW	Tj = operation limit temperature (***)	COPd	1.83	-
Bivalent temperature	Tbiv	-7	° C	Operation limit temperature	TOL	-25	° C
Reference design conditions for space heating	Tdesignh	-10	° C	Heating water operating limit temperature	WTOL	60	° C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	Psup	0.6	kW
Thermostat-off mode	P <sub>T0</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				


**Other items**

Capacity control	variable			Rated air flow rate, outdoors	-	2220	m³/h
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA				
Annual energy consumption	Q <sub>HE</sub>	5016	kWh				

**For heat pump combination heater:**

Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Q <sub>elec</sub>	-	kWh				
Annual electricity consumption	AEC	-	kWh				

**Contact details**

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY				Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey			
The identification and signature of the person empowered to bind the supplier:				Kenichi SAITO			
				Manager, Quality Assurance Department			
				TURKEY			

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SWM80VAA
	Indoor unit:	EHSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	8.0	kW	Seasonal space heating energy efficiency	$\eta_s$	181	%
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 ° C	P <sub>dh</sub>	7.1	kW	T <sub>j</sub> = - 7 ° C	COP <sub>d</sub>	3.20	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-	T <sub>j</sub> = + 2 ° C	COP <sub>d</sub>	4.75	-
T <sub>j</sub> = + 2 ° C	P <sub>dh</sub>	4.4	kW	T <sub>j</sub> = + 7 ° C	COP <sub>d</sub>	5.61	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-	T <sub>j</sub> = +12 ° C	COP <sub>d</sub>	6.19	-
T <sub>j</sub> = + 7 ° C	P <sub>dh</sub>	5.0	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	3.20	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-	T <sub>j</sub> = operation limit temperature (***)	COP <sub>d</sub>	2.63	-
T <sub>j</sub> = +12 ° C	P <sub>dh</sub>	3.0	kW	Operation limit temperature	TOL	-25	° C
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-	Heating water operating limit temperature	WTOL	60	° C
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	7.1	kW				
T <sub>j</sub> = operation limit temperature (***)	P <sub>dh</sub>	7.5	kW				
Bivalent temperature	T <sub>biv</sub>	-7	° C				
Reference design conditions for space heating	T <sub>designh</sub>	-10	° C				
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	0.5	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW	Type of energy input	Electrical		
Standby mode	P <sub>SB</sub>	0.015	kW				
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				
Other items							
Capacity control	variable			Rated air flow rate, outdoors	-	2220	m <sup>3</sup> /h
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA				
Annual energy consumption	Q <sub>HE</sub>	3599	kWh				

For heat pump combination heater:							
Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Q <sub>elec</sub>	-	kWh				
Annual electricity consumption	AEC	-	kWh				

**Contact details**

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY	Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey
The identification and signature of the person empowered to bind the supplier;	Kenichi SAITO
The signature is signed in the average climate / medium-temperature section.	Manager, Quality Assurance Department
	TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SWM80VAA
	Indoor unit:	EHSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	8.0	kW	Seasonal space heating energy efficiency	$\eta_s$	111	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	4.9	kW	Tj = - 7 °C	COPd	2.60	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = + 2 °C	COPd	3.33	-
Tj = + 2 °C	Pdh	4.0	kW	Tj = + 7 °C	COPd	4.80	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = +12 °C	COPd	6.65	-
Tj = + 7 °C	Pdh	4.3	kW	Tj = bivalent temperature	COPd	1.45	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = operation limit temperature (***)	COPd	1.35	-
Tj = +12 °C	Pdh	3.1	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	1.45	-
Degradation co-efficient (**)	Cdh	0.97	-	Operation limit temperature	TOL	-25	°C
Tj = bivalent temperature	Pdh	6.7	kW	Heating water operating limit temperature	WTOL	60	°C
Tj = operation limit temperature (***)	Pdh	4.7	kW				
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	6.5	kW				
Bivalent temperature	Tbiv	-16	°C				
Reference design conditions for space heating	Tdesignh	-22	°C				
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	Psup	3.3	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW	Type of energy input	Electrical		
Standby mode	P <sub>SB</sub>	0.015	kW				
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

**Other items**

Capacity control	variable			Rated air flow rate, outdoors	-	2220	m³/h
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA				
Annual energy consumption	Q <sub>HE</sub>	6890	kWh				

**For heat pump combination heater:**

Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Q <sub>elec</sub>	-	kWh				
Annual electricity consumption	AEC	-	kWh				

**Contact details**

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY	Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey
The identification and signature of the person empowered to bind the supplier:	Kenichi SAITO
The signature is signed in the average climate / medium-temperature section.	Manager, Quality Assurance Department
	TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SWM80VAA
	Indoor unit:	EHSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	8.0	kW	Seasonal space heating energy efficiency	$\eta_s$	141	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	4.8	kW	Tj = - 7 °C	COPd	3.43	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = + 2 °C	COPd	4.15	-
Tj = + 2 °C	Pdh	3.8	kW	Tj = + 7 °C	COPd	5.45	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = +12 °C	COPd	7.40	-
Tj = + 7 °C	Pdh	4.5	kW	Tj = bivalent temperature	COPd	2.00	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = operation limit temperature (***)	COPd	1.40	-
Tj = +12 °C	Pdh	3.1	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	2.00	-
Degradation co-efficient (**)	Cdh	0.96	-	Operation limit temperature	TOL	-25	°C
Tj = bivalent temperature	Pdh	6.7	kW	Heating water operating limit temperature	WTOL	60	°C
Tj = operation limit temperature (***)	Pdh	4.7	kW				
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	6.5	kW				
Bivalent temperature	Tbiv	-16	°C				
Reference design conditions for space heating	Tdesignh	-22	°C				
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	Psup	3.3	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW	Type of energy input	Electrical		
Standby mode	P <sub>SB</sub>	0.015	kW				
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

**Other items**

Capacity control	variable			Rated air flow rate, outdoors	-	2220	m³/h
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA				
Annual energy consumption	Q <sub>HE</sub>	5460	kWh				

**For heat pump combination heater:**

Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Q <sub>elec</sub>	-	kWh				
Annual electricity consumption	AEC	-	kWh				

**Contact details**

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY	Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey
The identification and signature of the person empowered to bind the supplier:	Kenichi SAITO
The signature is signed in the average climate / medium-temperature section.	Manager, Quality Assurance Department
	TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.



**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SWM80VAA
	Indoor unit:	EHSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit			
Rated heat output (*)	Prated	8.0	kW	Seasonal space heating energy efficiency	$\eta_s$	162	%			
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj						
Tj = - 7 ° C	Pdh	-	kW	Tj = - 7 ° C	COPd	-	-			
Degradation co-efficient (**)	Cdh	-	-							
Tj = + 2 ° C	Pdh	8.0	kW	Tj = + 2 ° C	COPd	2.00	-			
Degradation co-efficient (**)	Cdh	1.00	-							
Tj = + 7 ° C	Pdh	5.2	kW	Tj = + 7 ° C	COPd	3.48	-			
Degradation co-efficient (**)	Cdh	0.99	-							
Tj = +12 ° C	Pdh	4.5	kW	Tj = +12 ° C	COPd	5.92	-			
Degradation co-efficient (**)	Cdh	0.98	-							
Tj = bivalent temperature	Pdh	8.0	kW	Tj = bivalent temperature	COPd	2.00	-			
Tj = operation limit temperature (***)	Pdh	8.0	kW	Tj = operation limit temperature (***)	COPd	2.00	-			
Bivalent temperature	Tbiv	2	° C	Operation limit temperature	TOL	-25	° C			
Reference design conditions for space heating	Tdesignh	2	° C	Heating water operating limit temperature	WTOL	60	° C			
Power consumption in modes other than active mode				Supplementary heater						
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	0.0	kW			
Thermostat-off mode	P <sub>TO</sub>	0.015	kW							
Standby mode	P <sub>SB</sub>	0.015	kW							
Crankcase heater mode	P <sub>CK</sub>	0.000	kW							
Other items				Type of energy input						
Capacity control	variable			Electrical						
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA	Rated air flow rate, outdoors						
Annual energy consumption	Q <sub>HE</sub>	2584	kWh	-	2220	m <sup>3</sup> /h				

For heat pump combination heater:

Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Qelec	-	kWh				
Annual electricity consumption	AEC	-	kWh				

**Contact details**

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY	Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey
The identification and signature of the person empowered to bind the supplier:	Kenichi SAITO
The signature is signed in the average climate / medium-temperature section.	Manager, Quality Assurance Department
	TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.



**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SWM80VAA
	Indoor unit:	EHSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit			
Rated heat output (*)	Prated	8.0	kW	Seasonal space heating energy efficiency	$\eta_s$	219	%			
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj						
Tj = - 7 ° C	Pdh	-	kW	Tj = - 7 ° C	COPd	-	-			
Degradation co-efficient (**)	Cdh	-	-							
Tj = + 2 ° C	Pdh	8.0	kW	Tj = + 2 ° C	COPd	3.65	-			
Degradation co-efficient (**)	Cdh	0.99	-							
Tj = + 7 ° C	Pdh	5.1	kW	Tj = + 7 ° C	COPd	5.05	-			
Degradation co-efficient (**)	Cdh	0.99	-							
Tj = +12 ° C	Pdh	4.7	kW	Tj = +12 ° C	COPd	7.12	-			
Degradation co-efficient (**)	Cdh	0.98	-							
Tj = bivalent temperature	Pdh	8.0	kW	Tj = bivalent temperature	COPd	3.65	-			
Tj = operation limit temperature (***)	Pdh	8.0	kW	Tj = operation limit temperature (***)	COPd	3.65	-			
Bivalent temperature	Tbiv	2	° C	Operation limit temperature	TOL	-25	° C			
Reference design conditions for space heating	Tdesignh	2	° C	Heating water operating limit temperature	WTOL	60	° C			
Power consumption in modes other than active mode				Supplementary heater						
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	0.0	kW			
Thermostat-off mode	P <sub>TO</sub>	0.015	kW							
Standby mode	P <sub>SB</sub>	0.015	kW							
Crankcase heater mode	P <sub>CK</sub>	0.000	kW							
Other items				Type of energy input						
Capacity control	variable			Electrical						
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA	Rated air flow rate, outdoors						
Annual energy consumption	Q <sub>HE</sub>	1928	kWh	-	2220	m <sup>3</sup> /h				

For heat pump combination heater:

Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Q <sub>elec</sub>	-	kWh				
Annual electricity consumption	AEC	-	kWh				

**Contact details**

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY	Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey
The identification and signature of the person empowered to bind the supplier:	Kenichi SAITO
The signature is signed in the average climate / medium-temperature section.	Manager, Quality Assurance Department
	TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SWM80VAA
	Indoor unit:	ERSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	8.0	kW	Seasonal space heating energy efficiency	$\eta_s$	130	%
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj			
Tj = - 7 ° C	Pdh	7.1	kW	Tj = - 7 ° C	COPd	2.27	-
Degradation co-efficient (**)	Cdh	1.00	-				
Tj = + 2 ° C	Pdh	4.4	kW	Tj = + 2 ° C	COPd	3.19	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 7 ° C	Pdh	4.4	kW	Tj = + 7 ° C	COPd	4.18	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = +12 ° C	Pdh	2.8	kW	Tj = +12 ° C	COPd	5.79	-
Degradation co-efficient (**)	Cdh	0.97	-				
Tj = bivalent temperature	Pdh	7.1	kW	Tj = bivalent temperature	COPd	2.27	-
Tj = operation limit temperature (***)	Pdh	7.4	kW	Tj = operation limit temperature (***)	COPd	1.83	-
Bivalent temperature	Tbiv	-7	° C	Operation limit temperature	TOL	-25	° C
Reference design conditions for space heating	Tdesignh	-10	° C	Heating water operating limit temperature	WTOL	60	° C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	Psup	0.6	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input		Electrical	
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				


**Other items**

Capacity control	variable			Rated air flow rate, outdoors	-	2220	m³/h
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA				
Annual energy consumption	Q <sub>HE</sub>	4961	kWh				

**For heat pump combination heater:**

Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Q <sub>elec</sub>	-	kWh				
Annual electricity consumption	AEC	-	kWh				

**Contact details**

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY				Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey			
The identification and signature of the person empowered to bind the supplier:				Kenichi SAITO			
				Manager, Quality Assurance Department			
				TURKEY			

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SWM80VAA
	Indoor unit:	ERSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	8.0	kW	Seasonal space heating energy efficiency	$\eta_s$	184	%
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj			
Tj = - 7 ° C	Pdh	7.1	kW	Tj = - 7 ° C	COPd	3.20	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 2 ° C	Pdh	4.4	kW	Tj = + 2 ° C	COPd	4.75	-
Degradation co-efficient (**)	Cdh	0.98	-				
Tj = + 7 ° C	Pdh	5.0	kW	Tj = + 7 ° C	COPd	5.61	-
Degradation co-efficient (**)	Cdh	0.98	-				
Tj = +12 ° C	Pdh	3.0	kW	Tj = +12 ° C	COPd	6.19	-
Degradation co-efficient (**)	Cdh	0.97	-				
Tj = bivalent temperature	Pdh	7.1	kW	Tj = bivalent temperature	COPd	3.20	-
Tj = operation limit temperature (***)	Pdh	7.5	kW	Tj = operation limit temperature (***)	COPd	2.63	-
Bivalent temperature	Tbiv	-7	° C	Operation limit temperature	TOL	-25	° C
Reference design conditions for space heating	Tdesignh	-10	° C	Heating water operating limit temperature	WTOL	60	° C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	Psup	0.5	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				
Other items							
Capacity control	variable			Rated air flow rate, outdoors	-	2220	m <sup>3</sup> /h
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA				
Annual energy consumption	Q <sub>HE</sub>	3543	kWh				

For heat pump combination heater:							
Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Q <sub>elec</sub>	-	kWh				
Annual electricity consumption	AEC	-	kWh				

**Contact details**

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY				Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey			
The identification and signature of the person empowered to bind the supplier;				Kenichi SAITO			
The signature is signed in the average climate / medium-temperature section.				Manager, Quality Assurance Department			
				TURKEY			

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SWM80VAA
	Indoor unit:	ERSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	8.0	kW	Seasonal space heating energy efficiency	$\eta_s$	112	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	4.9	kW	Tj = - 7 °C	COPd	2.60	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = + 2 °C	COPd	3.33	-
Tj = + 2 °C	Pdh	4.0	kW	Tj = + 7 °C	COPd	4.80	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = +12 °C	COPd	6.65	-
Tj = + 7 °C	Pdh	4.3	kW	Tj = bivalent temperature	COPd	1.45	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = operation limit temperature (***)	COPd	1.35	-
Tj = +12 °C	Pdh	3.1	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	1.45	-
Degradation co-efficient (**)	Cdh	0.97	-	Operation limit temperature	TOL	-25	°C
Tj = bivalent temperature	Pdh	6.7	kW	Heating water operating limit temperature	WTOL	60	°C
Tj = operation limit temperature (***)	Pdh	4.7	kW				
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	6.5	kW				
Bivalent temperature	Tbiv	-16	°C				
Reference design conditions for space heating	Tdesignh	-22	°C				
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	Psup	3.3	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW	Type of energy input	Electrical		
Standby mode	P <sub>SB</sub>	0.015	kW				
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

**Other items**

Capacity control	variable			Rated air flow rate, outdoors	-	2220	m³/h
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA				
Annual energy consumption	Q <sub>HE</sub>	6857	kWh				

**For heat pump combination heater:**

Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Q <sub>elec</sub>	-	kWh				
Annual electricity consumption	AEC	-	kWh				

**Contact details**

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY	Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey
The identification and signature of the person empowered to bind the supplier:	Kenichi SAITO
The signature is signed in the average climate / medium-temperature section.	Manager, Quality Assurance Department
	TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SWM80VAA
	Indoor unit:	ERSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	8.0	kW	Seasonal space heating energy efficiency	$\eta_s$	142	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	4.8	kW	Tj = - 7 °C	COPd	3.43	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = + 2 °C	COPd	4.15	-
Tj = + 2 °C	Pdh	3.8	kW	Tj = + 7 °C	COPd	5.45	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = +12 °C	COPd	7.40	-
Tj = + 7 °C	Pdh	4.5	kW	Tj = bivalent temperature	COPd	2.00	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = operation limit temperature (***)	COPd	1.40	-
Tj = +12 °C	Pdh	3.1	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	2.00	-
Degradation co-efficient (**)	Cdh	0.96	-	Operation limit temperature	TOL	-25	°C
Tj = bivalent temperature	Pdh	6.7	kW	Heating water operating limit temperature	WTOL	60	°C
Tj = operation limit temperature (***)	Pdh	4.7	kW				
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	6.5	kW				
Bivalent temperature	Tbiv	-16	°C				
Reference design conditions for space heating	Tdesignh	-22	°C				
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	Psup	3.3	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW	Type of energy input	Electrical		
Standby mode	P <sub>SB</sub>	0.015	kW				
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				
Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2220	m³/h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA				
Annual energy consumption	Q <sub>HE</sub>	5427	kWh				

For heat pump combination heater:

Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Qelec	-	kWh				
Annual electricity consumption	AEC	-	kWh				

**Contact details**

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY	Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey
The identification and signature of the person empowered to bind the supplier:	Kenichi SAITO
The signature is signed in the average climate / medium-temperature section.	Manager, Quality Assurance Department
	TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.



**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SWM80VAA
	Indoor unit:	ERSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit			
Rated heat output (*)	Prated	8.0	kW	Seasonal space heating energy efficiency	$\eta_s$	167	%			
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj						
Tj = - 7 ° C	Pdh	-	kW	Tj = - 7 ° C	COPd	-	-			
Degradation co-efficient (**)	Cdh	-	-							
Tj = + 2 ° C	Pdh	8.0	kW	Tj = + 2 ° C	COPd	2.00	-			
Degradation co-efficient (**)	Cdh	1.00	-							
Tj = + 7 ° C	Pdh	5.2	kW	Tj = + 7 ° C	COPd	3.48	-			
Degradation co-efficient (**)	Cdh	0.99	-							
Tj = +12 ° C	Pdh	4.5	kW	Tj = +12 ° C	COPd	5.92	-			
Degradation co-efficient (**)	Cdh	0.98	-							
Tj = bivalent temperature	Pdh	8.0	kW	Tj = bivalent temperature	COPd	2.00	-			
Tj = operation limit temperature (***)	Pdh	8.0	kW	Tj = operation limit temperature (***)	COPd	2.00	-			
Bivalent temperature	Tbiv	2	° C	Operation limit temperature	TOL	-25	° C			
Reference design conditions for space heating	Tdesignh	2	° C	Heating water operating limit temperature	WTOL	60	° C			
Power consumption in modes other than active mode				Supplementary heater						
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	0.0	kW			
Thermostat-off mode	P <sub>TO</sub>	0.015	kW							
Standby mode	P <sub>SB</sub>	0.015	kW							
Crankcase heater mode	P <sub>CK</sub>	0.000	kW							
Other items				Type of energy input						
Capacity control	variable			Electrical						
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA	Rated air flow rate, outdoors						
Annual energy consumption	Q <sub>HE</sub>	2517	kWh	-	2220	m <sup>3</sup> /h				

For heat pump combination heater:

Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Qelec	-	kWh				
Annual electricity consumption	AEC	-	kWh				

**Contact details**

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY	Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey
The identification and signature of the person empowered to bind the supplier:	Kenichi SAITO
The signature is signed in the average climate / medium-temperature section.	Manager, Quality Assurance Department
	TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SWM80VAA
	Indoor unit:	ERSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit	
Rated heat output (*)	Prated	8.0	kW	Seasonal space heating energy efficiency	$\eta_s$	227	%	
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj				
Tj = - 7 ° C	Pdh	-	kW	Tj = - 7 ° C	COPd	-	-	
Degradation co-efficient (**)	Cdh	-	-					
Tj = + 2 ° C	Pdh	8.0	kW	Tj = + 2 ° C	COPd	3.65	-	
Degradation co-efficient (**)	Cdh	0.99	-					
Tj = + 7 ° C	Pdh	5.1	kW	Tj = + 7 ° C	COPd	5.05	-	
Degradation co-efficient (**)	Cdh	0.99	-					
Tj = +12 ° C	Pdh	4.7	kW	Tj = +12 ° C	COPd	7.12	-	
Degradation co-efficient (**)	Cdh	0.98	-					
Tj = bivalent temperature	Pdh	8.0	kW	Tj = bivalent temperature	COPd	3.65	-	
Tj = operation limit temperature (***)	Pdh	8.0	kW	Tj = operation limit temperature (***)	COPd	3.65	-	
Bivalent temperature	Tbiv	2	° C	Operation limit temperature	TOL	-25	° C	
Reference design conditions for space heating	Tdesignh	2	° C	Heating water operating limit temperature	WTOL	60	° C	
Power consumption in modes other than active mode				Supplementary heater				
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	Psup	0.0	kW	
Thermostat-off mode	P <sub>TO</sub>	0.015	kW					
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical			
Crankcase heater mode	P <sub>CK</sub>	0.000	kW					
Other items								
Capacity control	variable			Rated air flow rate, outdoors	-	2220	m³/h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA					
Annual energy consumption	Q <sub>HE</sub>	1862	kWh					

For heat pump combination heater:

Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Qelec	-	kWh				
Annual electricity consumption	AEC	-	kWh				

**Contact details**

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY	Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey
The identification and signature of the person empowered to bind the supplier:	Kenichi SAITO
The signature is signed in the average climate / medium-temperature section.	Manager, Quality Assurance Department
	TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SWM80VAA
	Indoor unit:	EHSD-MED
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	8.0	kW	Seasonal space heating energy efficiency	$\eta_s$	129	%
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj			
Tj = - 7 ° C	Pdh	7.1	kW	Tj = - 7 ° C	COPd	2.27	-
Degradation co-efficient (**)	Cdh	1.00	-				
Tj = + 2 ° C	Pdh	4.4	kW	Tj = + 2 ° C	COPd	3.19	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 7 ° C	Pdh	4.4	kW	Tj = + 7 ° C	COPd	4.18	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = +12 ° C	Pdh	2.8	kW	Tj = +12 ° C	COPd	5.79	-
Degradation co-efficient (**)	Cdh	0.97	-				
Tj = bivalent temperature	Pdh	7.1	kW	Tj = bivalent temperature	COPd	2.27	-
Tj = operation limit temperature (***)	Pdh	7.4	kW	Tj = operation limit temperature (***)	COPd	1.83	-
Bivalent temperature	Tbiv	-7	° C	Operation limit temperature	TOL	-25	° C
Reference design conditions for space heating	Tdesignh	-10	° C	Heating water operating limit temperature	WTOL	60	° C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	Psup	0.6	kW
Thermostat-off mode	P <sub>T0</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input		Electrical	
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				


**Other items**

Capacity control	variable			Rated air flow rate, outdoors	-	2220	m³/h
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA				
Annual energy consumption	Q <sub>HE</sub>	5016	kWh				

**For heat pump combination heater:**

Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Q <sub>elec</sub>	-	kWh				
Annual electricity consumption	AEC	-	kWh				

**Contact details**

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY				Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey			
The identification and signature of the person empowered to bind the supplier:				Kenichi SAITO			
				Manager, Quality Assurance Department			
				TURKEY			

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SWM80VAA
	Indoor unit:	EHSD-MED
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit			
Rated heat output (*)	Prated	8.0	kW	Seasonal space heating energy efficiency	$\eta_s$	181	%			
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj						
Tj = - 7 ° C	Pdh	7.1	kW	Tj = - 7 ° C	COPd	3.20	-			
Degradation co-efficient (**)	Cdh	0.99	-							
Tj = + 2 ° C	Pdh	4.4	kW	Tj = + 2 ° C	COPd	4.75	-			
Degradation co-efficient (**)	Cdh	0.98	-							
Tj = + 7 ° C	Pdh	5.0	kW	Tj = + 7 ° C	COPd	5.61	-			
Degradation co-efficient (**)	Cdh	0.98	-							
Tj = +12 ° C	Pdh	3.0	kW	Tj = +12 ° C	COPd	6.19	-			
Degradation co-efficient (**)	Cdh	0.97	-							
Tj = bivalent temperature	Pdh	7.1	kW	Tj = bivalent temperature	COPd	3.20	-			
Tj = operation limit temperature (***)	Pdh	7.5	kW	Tj = operation limit temperature (***)	COPd	2.63	-			
Bivalent temperature	Tbiv	-7	° C	Operation limit temperature	TOL	-25	° C			
Reference design conditions for space heating	Tdesignh	-10	° C	Heating water operating limit temperature	WTOL	60	° C			
Power consumption in modes other than active mode				Supplementary heater						
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	0.5	kW			
Thermostat-off mode	P <sub>TO</sub>	0.015	kW							
Standby mode	P <sub>SB</sub>	0.015	kW							
Crankcase heater mode	P <sub>CK</sub>	0.000	kW							
Other items				Type of energy input						
Capacity control	variable			Electrical						
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA	Rated air flow rate, outdoors						
Annual energy consumption	Q <sub>HE</sub>	3599	kWh	-		2220	m <sup>3</sup> /h			

For heat pump combination heater:

Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Q <sub>elec</sub>	-	kWh				
Annual electricity consumption	AEC	-	kWh				

**Contact details**

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY	Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey
The identification and signature of the person empowered to bind the supplier;	Kenichi SAITO
The signature is signed in the average climate / medium-temperature section.	Manager, Quality Assurance Department
	TURKEY

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

· Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SWM80VAA
	Indoor unit:	EHSD-MED
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	8.0	kW	Seasonal space heating energy efficiency	$\eta_s$	111	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	4.9	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	2.60	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	3.33	-
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	4.0	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	4.80	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	6.65	-
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	4.3	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	1.45	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-	T <sub>j</sub> = operation limit temperature (***)	COP <sub>d</sub>	1.35	-
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	3.1	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	1.45	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-	Operation limit temperature	TOL	-25	°C
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	6.7	kW	Heating water operating limit temperature	WTOL	60	°C
T <sub>j</sub> = operation limit temperature (***)	P <sub>dh</sub>	4.7	kW				
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	6.5	kW				
Bivalent temperature	T <sub>biv</sub>	-16	°C				
Reference design conditions for space heating	T <sub>designh</sub>	-22	°C				
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	3.3	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW	Type of energy input	Electrical		
Standby mode	P <sub>SB</sub>	0.015	kW				
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

**Other items**

Capacity control	variable			Rated air flow rate, outdoors	-	2220	m³/h
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA				
Annual energy consumption	Q <sub>HE</sub>	6890	kWh				

**For heat pump combination heater:**

Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Q <sub>elec</sub>	-	kWh				
Annual electricity consumption	AEC	-	kWh				

**Contact details**

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY	Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey
The identification and signature of the person empowered to bind the supplier:	Kenichi SAITO
The signature is signed in the average climate / medium-temperature section.	Manager, Quality Assurance Department
	TURKEY

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

· Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating P<sub>designh</sub>, and the rated heat output of a supplementary heater P<sub>sup</sub> is equal to the supplementary capacity for heating sup(T<sub>j</sub>).

(\*\*) If C<sub>dh</sub> is not determined by measurement then the default degradation coefficient is C<sub>dh</sub> = 0.9.

(\*\*\*) If the declared TOL is lower than the T<sub>designh</sub> of the considered climate then the outdoor dry bulb temperature T<sub>j</sub> is equal to T<sub>designh</sub>.



**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SWM80VAA
	Indoor unit:	EHSD-MED
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	8.0	kW	Seasonal space heating energy efficiency	$\eta_s$	141	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	4.8	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	3.43	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	4.15	-
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	3.8	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	5.45	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	7.40	-
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	4.5	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	2.00	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-	T <sub>j</sub> = operation limit temperature (***)	COP <sub>d</sub>	1.40	-
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	3.1	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	2.00	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.96	-	Operation limit temperature	TOL	-25	°C
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	6.7	kW	Heating water operating limit temperature	WTOL	60	°C
T <sub>j</sub> = operation limit temperature (***)	P <sub>dh</sub>	4.7	kW				
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	6.5	kW				
Bivalent temperature	T <sub>biv</sub>	-16	°C				
Reference design conditions for space heating	T <sub>designh</sub>	-22	°C				
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	3.3	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW	Type of energy input	Electrical		
Standby mode	P <sub>SB</sub>	0.015	kW				
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors	-	2220	m³/h
Capacity control	variable						
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA				
Annual energy consumption	Q <sub>HE</sub>	5460	kWh				

For heat pump combination heater:				Water heating energy efficiency	$\eta_{wh}$	-	%
Declared load profile	-						
Daily electricity consumption	Q <sub>elec</sub>	-	kWh				
Annual electricity consumption	AEC	-	kWh				

Contact details				Mitsubishi Electric Air Conditioning Systems Manufacturing Turkey Joint Stock Company			
				Manisa OSB 4.Kisim Keciikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey			
The identification and signature of the person empowered to bind the supplier:				Kenichi SAITO			
The signature is signed in the average climate / medium-temperature section.				Manager, Quality Assurance Department			
				TURKEY			

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

· Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SWM80VAA
	Indoor unit:	EHSD-MED
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit			
Rated heat output (*)	Prated	8.0	kW	Seasonal space heating energy efficiency	$\eta_s$	162	%			
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj						
Tj = - 7 °C	Pdh	-	kW	Tj = - 7 °C	COPd	-	-			
Degradation co-efficient (**)	Cdh	-	-							
Tj = + 2 °C	Pdh	8.0	kW	Tj = + 2 °C	COPd	2.00	-			
Degradation co-efficient (**)	Cdh	1.00	-							
Tj = + 7 °C	Pdh	5.2	kW	Tj = + 7 °C	COPd	3.48	-			
Degradation co-efficient (**)	Cdh	0.99	-							
Tj = +12 °C	Pdh	4.5	kW	Tj = +12 °C	COPd	5.92	-			
Degradation co-efficient (**)	Cdh	0.98	-							
Tj = bivalent temperature	Pdh	8.0	kW	Tj = bivalent temperature	COPd	2.00	-			
Tj = operation limit temperature (***)	Pdh	8.0	kW	Tj = operation limit temperature (***)	COPd	2.00	-			
Bivalent temperature	Tbiv	2	°C	Operation limit temperature	TOL	-25	°C			
Reference design conditions for space heating	Tdesignh	2	°C	Heating water operating limit temperature	WTOL	60	°C			
Power consumption in modes other than active mode				Supplementary heater						
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	0.0	kW			
Thermostat-off mode	P <sub>TO</sub>	0.015	kW							
Standby mode	P <sub>SB</sub>	0.015	kW							
Crankcase heater mode	P <sub>CK</sub>	0.000	kW							
Other items				Type of energy input						
Capacity control	variable			Electrical						
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA	Rated air flow rate, outdoors						
Annual energy consumption	Q <sub>HE</sub>	2584	kWh	-						
				2220						
				m <sup>3</sup> /h						

For heat pump combination heater:

Declared load profile	–			Water heating energy efficiency	$\eta_{wh}$	–	%
Daily electricity consumption	Q <sub>elec</sub>	–	kWh				
Annual electricity consumption	AEC	–	kWh				

**Contact details**

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY	Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey
The identification and signature of the person empowered to bind the supplier:	Kenichi SAITO
The signature is signed in the average climate / medium-temperature section.	Manager, Quality Assurance Department
	TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SWM80VAA
	Indoor unit:	EHSD-MED
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit			
Rated heat output (*)	Prated	8.0	kW	Seasonal space heating energy efficiency	$\eta_s$	219	%			
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj						
Tj = - 7 ° C	Pdh	–	kW	Tj = - 7 ° C	COPd	–	–			
Degradation co-efficient (**)	Cdh	–	–							
Tj = + 2 ° C	Pdh	8.0	kW	Tj = + 2 ° C	COPd	3.65	–			
Degradation co-efficient (**)	Cdh	0.99	–							
Tj = + 7 ° C	Pdh	5.1	kW	Tj = + 7 ° C	COPd	5.05	–			
Degradation co-efficient (**)	Cdh	0.99	–							
Tj = +12 ° C	Pdh	4.7	kW	Tj = +12 ° C	COPd	7.12	–			
Degradation co-efficient (**)	Cdh	0.98	–							
Tj = bivalent temperature	Pdh	8.0	kW	Tj = bivalent temperature	COPd	3.65	–			
Tj = operation limit temperature (***)	Pdh	8.0	kW	Tj = operation limit temperature (***)	COPd	3.65	–			
Bivalent temperature	Tbiv	2	° C	Operation limit temperature	TOL	–25	° C			
Reference design conditions for space heating	Tdesignh	2	° C	Heating water operating limit temperature	WTOL	60	° C			
Power consumption in modes other than active mode				Supplementary heater						
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	0.0	kW			
Thermostat-off mode	P <sub>TO</sub>	0.015	kW							
Standby mode	P <sub>SB</sub>	0.015	kW							
Crankcase heater mode	P <sub>CK</sub>	0.000	kW							
Other items				Type of energy input						
Capacity control	variable			Electrical						
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA	Rated air flow rate, outdoors						
Annual energy consumption	Q <sub>HE</sub>	1928	kWh	–						
For heat pump combination heater:				2220						
Declared load profile	–			m <sup>3</sup> /h						
Daily electricity consumption	Q <sub>elec</sub>	–	kWh	Water heating energy efficiency						
Annual electricity consumption	AEC	–	kWh	$\eta_{wh}$						
Contact details				–						

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY				Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey			
The identification and signature of the person empowered to bind the supplier:				Kenichi SAITO			
The signature is signed in the average climate / medium-temperature section.				Manager, Quality Assurance Department			
				TURKEY			

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SWM80VAA
	Indoor unit:	ERSD-MED
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	8.0	kW	Seasonal space heating energy efficiency	$\eta_s$	130	%
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj			
Tj = - 7 ° C	Pdh	7.1	kW	Tj = - 7 ° C	COPd	2.27	-
Degradation co-efficient (**)	Cdh	1.00	-				
Tj = + 2 ° C	Pdh	4.4	kW	Tj = + 2 ° C	COPd	3.19	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 7 ° C	Pdh	4.4	kW	Tj = + 7 ° C	COPd	4.18	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = +12 ° C	Pdh	2.8	kW	Tj = +12 ° C	COPd	5.79	-
Degradation co-efficient (**)	Cdh	0.97	-				
Tj = bivalent temperature	Pdh	7.1	kW	Tj = bivalent temperature	COPd	2.27	-
Tj = operation limit temperature (***)	Pdh	7.4	kW	Tj = operation limit temperature (***)	COPd	1.83	-
Bivalent temperature	Tbiv	-7	° C	Operation limit temperature	TOL	-25	° C
Reference design conditions for space heating	Tdesignh	-10	° C	Heating water operating limit temperature	WTOL	60	° C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	Psup	0.6	kW
Thermostat-off mode	P <sub>T0</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				


**Other items**

Capacity control	variable			Rated air flow rate, outdoors	-	2220	m³/h
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA				
Annual energy consumption	Q <sub>HE</sub>	4961	kWh				

**For heat pump combination heater:**

Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Q <sub>elec</sub>	-	kWh				
Annual electricity consumption	AEC	-	kWh				

**Contact details**

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY				Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey			
The identification and signature of the person empowered to bind the supplier:				Kenichi SAITO			
				Manager, Quality Assurance Department			
				TURKEY			

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SWM80VAA
	Indoor unit:	ERSD-MED
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	8.0	kW	Seasonal space heating energy efficiency	$\eta_s$	184	%
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj			
Tj = - 7 ° C	Pdh	7.1	kW	Tj = - 7 ° C	COPd	3.20	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 2 ° C	Pdh	4.4	kW	Tj = + 2 ° C	COPd	4.75	-
Degradation co-efficient (**)	Cdh	0.98	-				
Tj = + 7 ° C	Pdh	5.0	kW	Tj = + 7 ° C	COPd	5.61	-
Degradation co-efficient (**)	Cdh	0.98	-				
Tj = +12 ° C	Pdh	3.0	kW	Tj = +12 ° C	COPd	6.19	-
Degradation co-efficient (**)	Cdh	0.97	-				
Tj = bivalent temperature	Pdh	7.1	kW	Tj = bivalent temperature	COPd	3.20	-
Tj = operation limit temperature (***)	Pdh	7.5	kW	Tj = operation limit temperature (***)	COPd	2.63	-
Bivalent temperature	Tbiv	-7	° C	Operation limit temperature	TOL	-25	° C
Reference design conditions for space heating	Tdesignh	-10	° C	Heating water operating limit temperature	WTOL	60	° C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	Psup	0.5	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				
Other items							
Capacity control	variable			Rated air flow rate, outdoors	-	2220	m <sup>3</sup> /h
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA				
Annual energy consumption	Q <sub>HE</sub>	3543	kWh				

For heat pump combination heater:							
Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Q <sub>elec</sub>	-	kWh				
Annual electricity consumption	AEC	-	kWh				

Contact details							
MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY				Manisa OSB 4.Kisim Kccilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey			
The identification and signature of the person empowered to bind the supplier;				Kenichi SAITO			
The signature is signed in the average climate / medium-temperature section.				Manager, Quality Assurance Department			
				TURKEY			

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

· Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.



**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SWM80VAA
	Indoor unit:	ERSD-MED
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	8.0	kW	Seasonal space heating energy efficiency	$\eta_s$	112	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	4.9	kW	Tj = - 7 °C	COPd	2.60	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = + 2 °C	COPd	3.33	-
Tj = + 2 °C	Pdh	4.0	kW	Tj = + 7 °C	COPd	4.80	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = +12 °C	COPd	6.65	-
Tj = + 7 °C	Pdh	4.3	kW	Tj = bivalent temperature	COPd	1.45	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = operation limit temperature (***)	COPd	1.35	-
Tj = +12 °C	Pdh	3.1	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	1.45	-
Degradation co-efficient (**)	Cdh	0.97	-	Operation limit temperature	TOL	-25	°C
Tj = bivalent temperature	Pdh	6.7	kW	Heating water operating limit temperature	WTOL	60	°C
Tj = operation limit temperature (***)	Pdh	4.7	kW				
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	6.5	kW				
Bivalent temperature	Tbiv	-16	°C				
Reference design conditions for space heating	Tdesignh	-22	°C				
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	Psup	3.3	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW	Type of energy input	Electrical		
Standby mode	P <sub>SB</sub>	0.015	kW				
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

**Other items**

Capacity control	variable			Rated air flow rate, outdoors	-	2220	m³/h
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA				
Annual energy consumption	Q <sub>HE</sub>	6857	kWh				

**For heat pump combination heater:**

Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Qelec	-	kWh				
Annual electricity consumption	AEC	-	kWh				

**Contact details**

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY				Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey			
The identification and signature of the person empowered to bind the supplier:				Kenichi SAITO			
The signature is signed in the average climate / medium-temperature section.				Manager, Quality Assurance Department			
				TURKEY			

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

· Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SWM80VAA
	Indoor unit:	ERSD-MED
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	8.0	kW	Seasonal space heating energy efficiency	$\eta_s$	142	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	4.8	kW	Tj = - 7 °C	COPd	3.43	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = + 2 °C	COPd	4.15	-
Tj = + 2 °C	Pdh	3.8	kW	Tj = + 7 °C	COPd	5.45	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = +12 °C	COPd	7.40	-
Tj = + 7 °C	Pdh	4.5	kW	Tj = bivalent temperature	COPd	2.00	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = operation limit temperature (***)	COPd	1.40	-
Tj = +12 °C	Pdh	3.1	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	2.00	-
Degradation co-efficient (**)	Cdh	0.96	-	Operation limit temperature	TOL	-25	°C
Tj = bivalent temperature	Pdh	6.7	kW	Heating water operating limit temperature	WTOL	60	°C
Tj = operation limit temperature (***)	Pdh	4.7	kW				
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	6.5	kW				
Bivalent temperature	Tbiv	-16	°C				
Reference design conditions for space heating	Tdesignh	-22	°C				
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	Psup	3.3	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW	Type of energy input	Electrical		
Standby mode	P <sub>SB</sub>	0.015	kW				
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

**Other items**

Capacity control	variable			Rated air flow rate, outdoors	-	2220	m³/h
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA				
Annual energy consumption	Q <sub>HE</sub>	5427	kWh				

**For heat pump combination heater:**

Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Q <sub>elec</sub>	-	kWh				
Annual electricity consumption	AEC	-	kWh				

**Contact details**

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY	Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey
The identification and signature of the person empowered to bind the supplier:	Kenichi SAITO
The signature is signed in the average climate / medium-temperature section.	Manager, Quality Assurance Department
	TURKEY

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

· Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SWM80VAA
	Indoor unit:	ERSD-MED
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit			
Rated heat output (*)	Prated	8.0	kW	Seasonal space heating energy efficiency	$\eta_s$	167	%			
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj						
Tj = - 7 °C	Pdh	-	kW	Tj = - 7 °C	COPd	-	-			
Degradation co-efficient (**)	Cdh	-	-							
Tj = + 2 °C	Pdh	8.0	kW	Tj = + 2 °C	COPd	2.00	-			
Degradation co-efficient (**)	Cdh	1.00	-							
Tj = + 7 °C	Pdh	5.2	kW	Tj = + 7 °C	COPd	3.48	-			
Degradation co-efficient (**)	Cdh	0.99	-							
Tj = +12 °C	Pdh	4.5	kW	Tj = +12 °C	COPd	5.92	-			
Degradation co-efficient (**)	Cdh	0.98	-							
Tj = bivalent temperature	Pdh	8.0	kW	Tj = bivalent temperature	COPd	2.00	-			
Tj = operation limit temperature (***)	Pdh	8.0	kW	Tj = operation limit temperature (***)	COPd	2.00	-			
Bivalent temperature	Tbiv	2	°C	Operation limit temperature	TOL	-25	°C			
Reference design conditions for space heating	Tdesignh	2	°C	Heating water operating limit temperature	WTOL	60	°C			
Power consumption in modes other than active mode				Supplementary heater						
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	0.0	kW			
Thermostat-off mode	P <sub>TO</sub>	0.015	kW							
Standby mode	P <sub>SB</sub>	0.015	kW							
Crankcase heater mode	P <sub>CK</sub>	0.000	kW							
Other items				Type of energy input						
Capacity control	variable			Electrical						
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA	Rated air flow rate, outdoors						
Annual energy consumption	Q <sub>HE</sub>	2517	kWh	-						
				2220						
				m <sup>3</sup> /h						

For heat pump combination heater:

Declared load profile	–			Water heating energy efficiency	$\eta_{wh}$	–	%
Daily electricity consumption	Qelec	–	kWh				
Annual electricity consumption	AEC	–	kWh				

**Contact details**

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY	Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey
The identification and signature of the person empowered to bind the supplier:	Kenichi SAITO
The signature is signed in the average climate / medium-temperature section.	Manager, Quality Assurance Department
	TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

**PRODUCT INFORMATION / TECHNICAL DOCUMENTATION**

Model(s):	Outdoor unit:	PUZ-SWM80VAA
	Indoor unit:	ERSD-MED
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit			
Rated heat output (*)	Prated	8.0	kW	Seasonal space heating energy efficiency	$\eta_s$	227	%			
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj						
Tj = - 7 ° C	Pdh	-	kW	Tj = - 7 ° C	COPd	-	-			
Degradation co-efficient (**)	Cdh	-	-							
Tj = + 2 ° C	Pdh	8.0	kW	Tj = + 2 ° C	COPd	3.65	-			
Degradation co-efficient (**)	Cdh	0.99	-							
Tj = + 7 ° C	Pdh	5.1	kW	Tj = + 7 ° C	COPd	5.05	-			
Degradation co-efficient (**)	Cdh	0.99	-							
Tj = +12 ° C	Pdh	4.7	kW	Tj = +12 ° C	COPd	7.12	-			
Degradation co-efficient (**)	Cdh	0.98	-							
Tj = bivalent temperature	Pdh	8.0	kW	Tj = bivalent temperature	COPd	3.65	-			
Tj = operation limit temperature (***)	Pdh	8.0	kW	Tj = operation limit temperature (***)	COPd	3.65	-			
Bivalent temperature	Tbiv	2	° C	Operation limit temperature	TOL	-25	° C			
Reference design conditions for space heating	Tdesignh	2	° C	Heating water operating limit temperature	WTOL	60	° C			
Power consumption in modes other than active mode				Supplementary heater						
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	Psup	0.0	kW			
Thermostat-off mode	P <sub>TO</sub>	0.015	kW							
Standby mode	P <sub>SB</sub>	0.015	kW							
Crankcase heater mode	P <sub>CK</sub>	0.000	kW							
Other items				Type of energy input						
Capacity control	variable			Electrical						
Sound power level, indoors/outdoors	L <sub>WA</sub>	41 / 54	dBA	Rated air flow rate, outdoors						
Annual energy consumption	Q <sub>HE</sub>	1862	kWh	-	2220	m <sup>3</sup> /h				

For heat pump combination heater:

Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Qelec	-	kWh				
Annual electricity consumption	AEC	-	kWh				

**Contact details**

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY	Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey
The identification and signature of the person empowered to bind the supplier:	Kenichi SAITO
The signature is signed in the average climate / medium-temperature section.	Manager, Quality Assurance Department
	TURKEY

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(\*\*\*) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.